


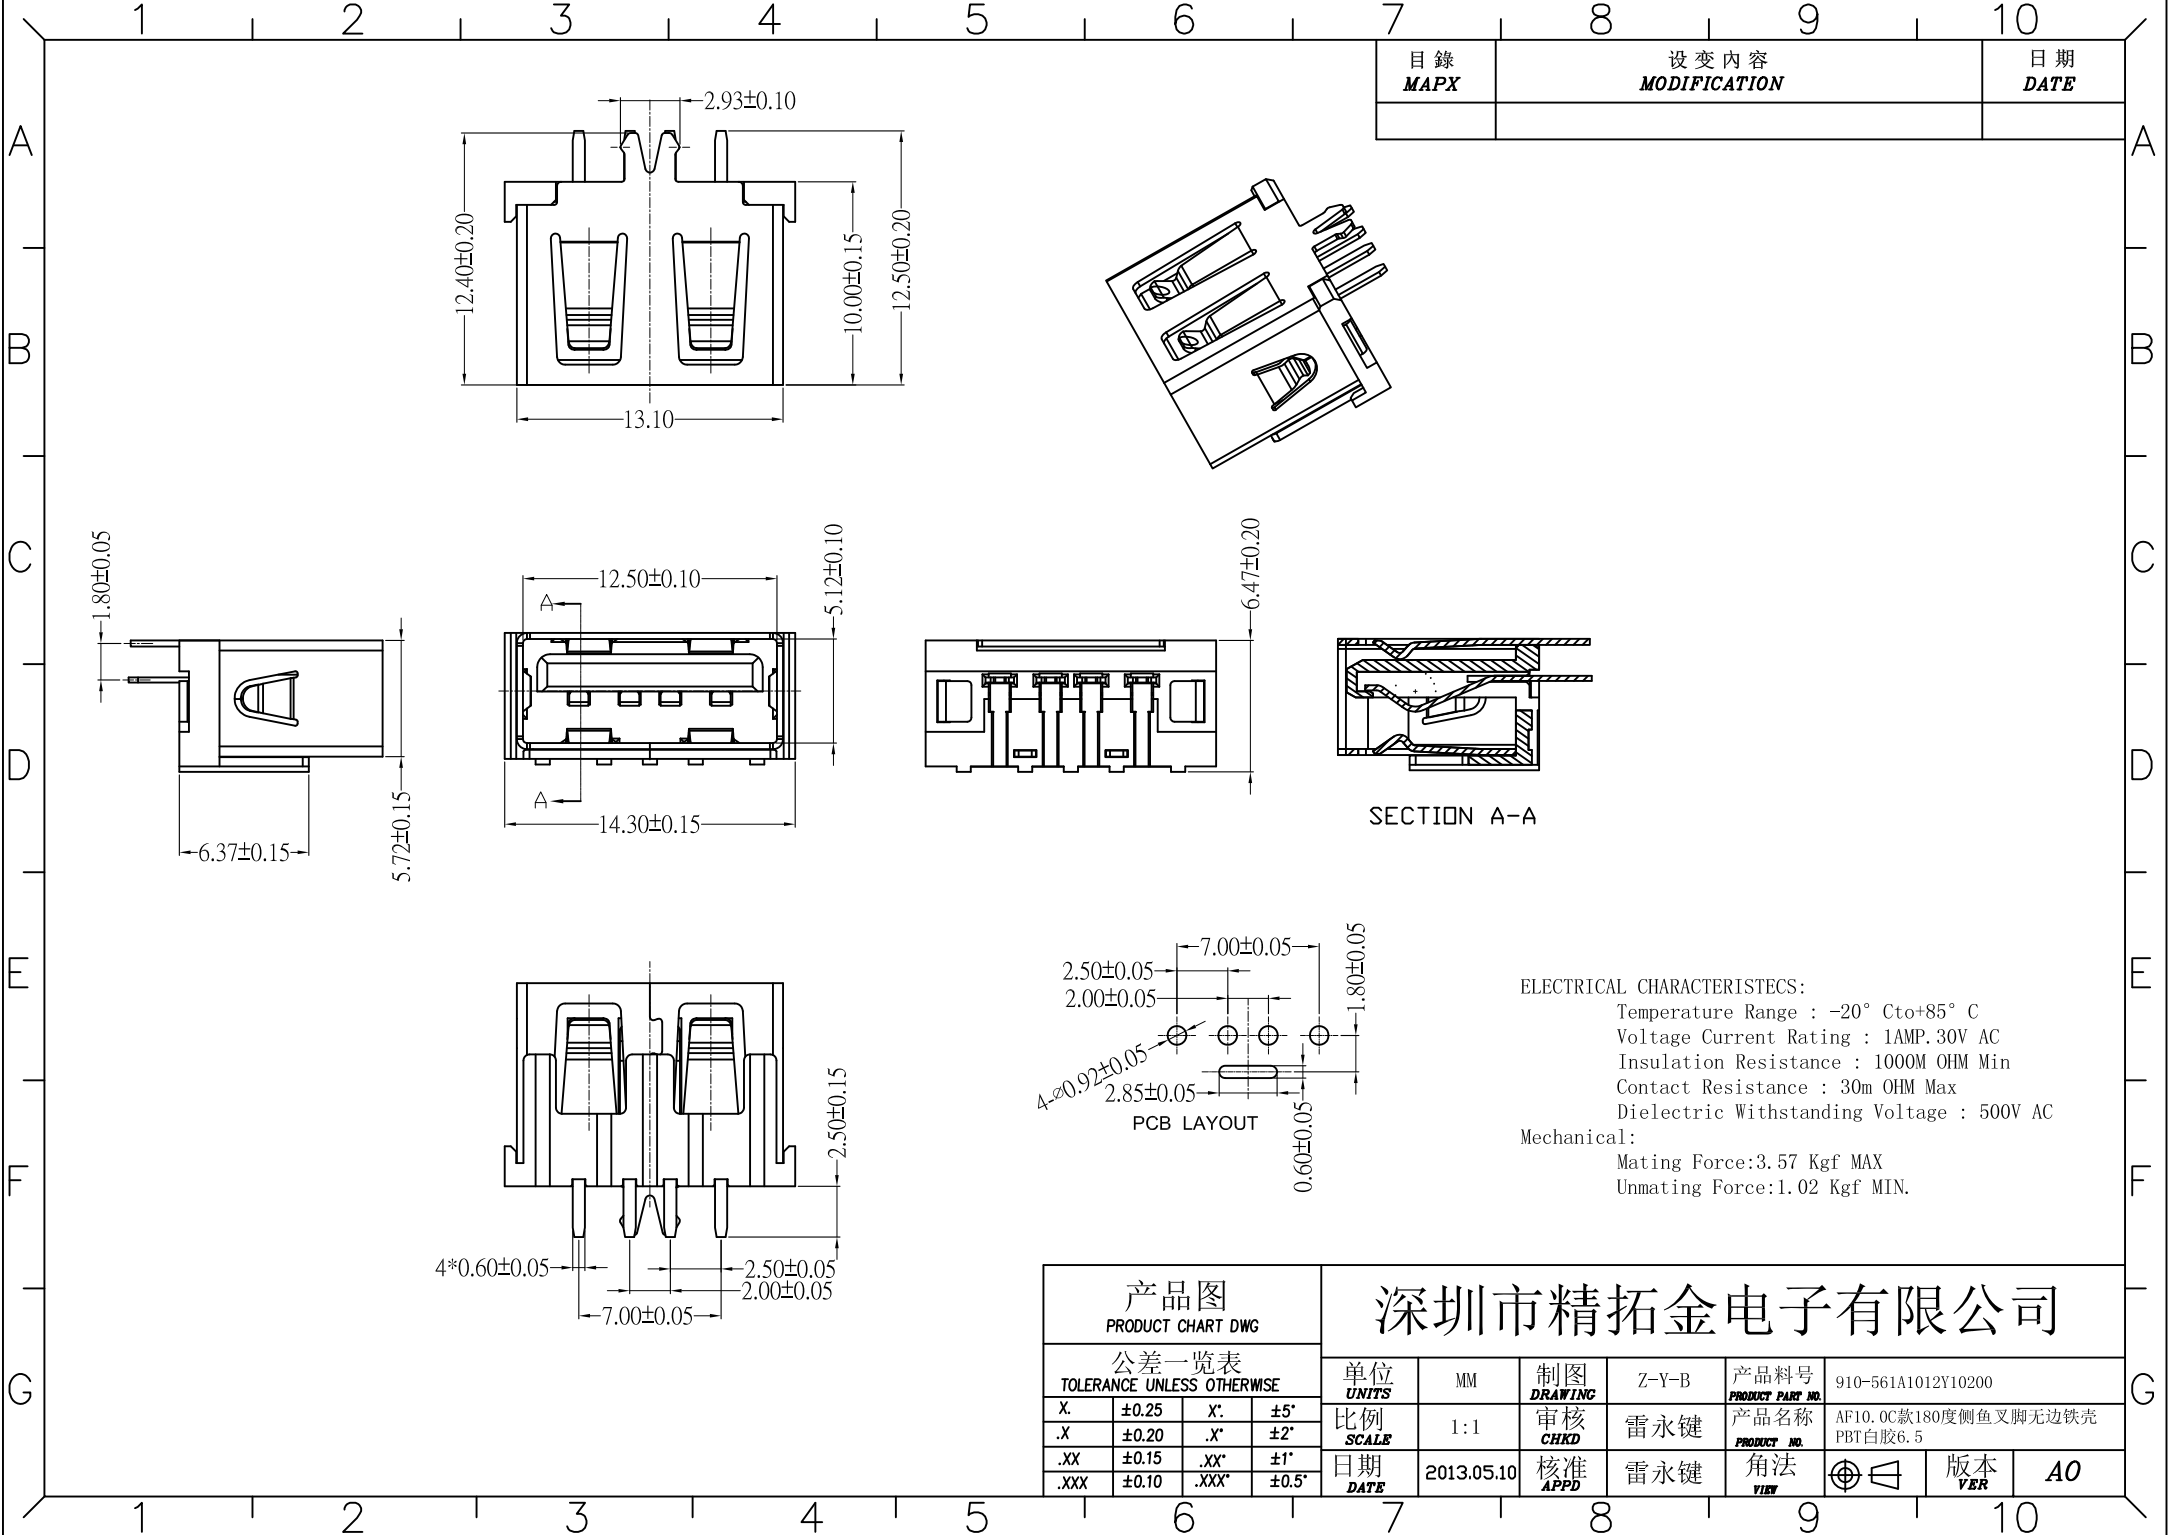

目錄 MAPX	設變內容 MODIFICATION	日期 DATE

ELECTRICAL CHARACTERISTICS:
Temperature Range : -20° C to +85° C
Voltage Current Rating : 1AMP, 30V AC
Insulation Resistance : 1000M OHM Min
Contact Resistance : 30m OHM Max
Dielectric Withstanding Voltage : 500V AC

Mechanical:
Mating Force: 3.57 KgF MAX
Unmating Force: 1.02 KgF MIN.

产品图 PRODUCT CHART DWG		深圳市精拓金电子有限公司						
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	MM	制图 DRAWING	Z-Y-B	产品料号 PRODUCT PART NO.
X.	±0.25	X'.	±5°	比例 SCALE	1:1	审核 CHKD	雷永键	产品名称 PRODUCT NO.
.X	±0.20	.X'	±2°					AF10.0C款180度侧鱼叉脚无边铁壳 PBT白胶6.5
.XX	±0.15	.XX'	±1°	日期 DATE	2013.05.10	核准 APPD	雷永键	角法 VIEW
.XXX	±0.10	.XXX'	±0.5°					⊕ ⊞
							版本 VER	A0