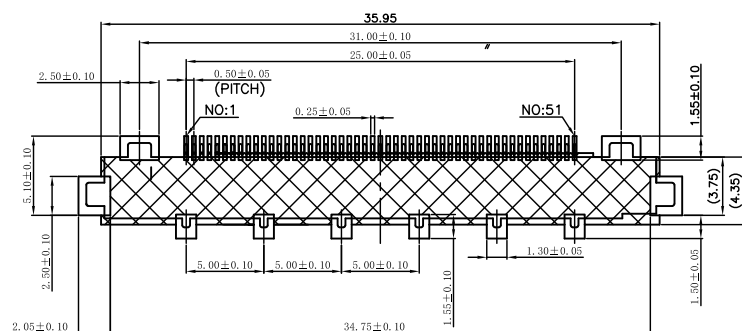
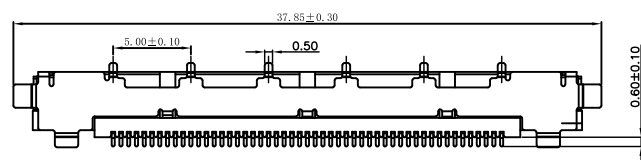


RECOMMENDED LVDS FFC DIM.

SECTION B-B

RECOMMEND P.C.B LAYOUT
SCALE 1:2

NOTES:

1. MATERIAL:

1.1 HOUSING: THERMOPLASTIC, HIGH TEMP.

UL94V-0; COLOR:BLACK.

1.2 CONTACT: COPPER ALLOY,T=0.20.

1.3 SHELL:STAINLESS STEEL,T=0.20.

2. FINISH:

2.1 CONTACT:

UNDER PLATING: 50u" MIN. NICKEL OVERALL.

CONTACT AREA FINISH:Au 1u" MIN.

2.2 SHELL:

UNDER PLATING: 30u" MIN. NICKEL OVERALL.

AND FINISH: Tin 50u" MIN.



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.* ±2' X.X' ±0.5'		DRAWN BY :	DATE :	PART NAME:	
		陈一鸣	2014-02-23	LVDS 0.5PH 3.75H 51P	
 UNIT: mm [inch]		CHECKED BY:	DATE :	PART NO.	HYCW69-LVDS51-375B
		马跃	2014-02-23	MOLD NO.	
SCALE:1:1 SIZE: A4		APPROVED BY:	DATE :	DRAW NO:	HYC-2309051036
		邱敏	2014-02-23	SHEET NO.	1 OF 1