
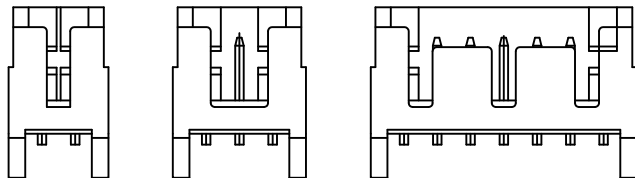
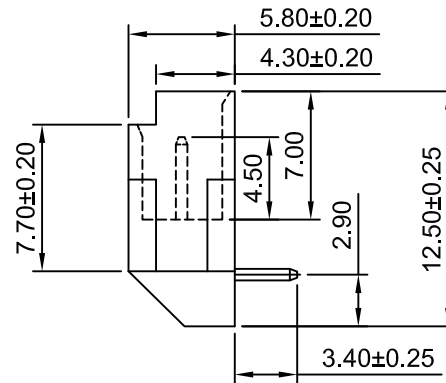
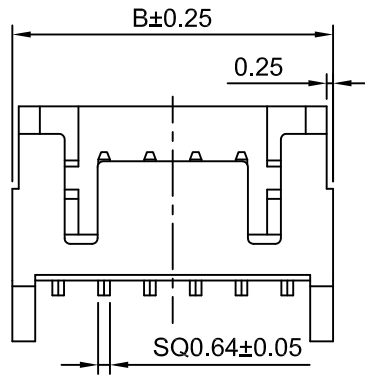


4P~6P

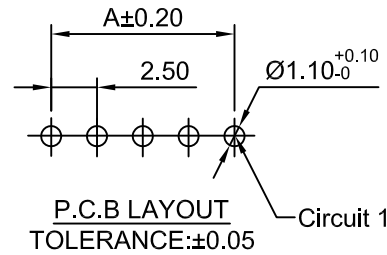

2P
2:1

3P
2:1

7P~20P
2:1

Ordering Information:

A2508WRD-XP - *** - ***
1 2 3

1.Part NO.

2.Material:

(Blank): Nylon 66,UL94V-0(White)

GWT: Nylon 66,UL94V-0(Beige),

IEC 60335-1,5th Edition

Glow Wire Capable.

3.Finish:

(Blank): Tin over Nickel

G: Gold over Nickel(Au:1u")

G3: Gold over Nickel (Au:3u"Mating area)

G8: Gold over Nickel (Au:8u"Mating area)

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 1000V AC/minute

Pin Material: Brass

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A2508WRD-2P	2.50	7.40
A2508WRD-3P	5.00	9.90
A2508WRD-4P	7.50	12.40
A2508WRD-5P	10.00	14.90
A2508WRD-6P	12.50	17.40
A2508WRD-7P	15.00	19.90
A2508WRD-8P	17.50	22.40
A2508WRD-9P	20.00	24.90
A2508WRD-10P	22.50	27.40
A2508WRD-11P	25.00	29.90
A2508WRD-12P	27.50	32.40
A2508WRD-13P	30.00	34.90
A2508WRD-14P	32.50	37.40
A2508WRD-15P	35.00	39.90
A2508WRD-16P	37.50	42.40
A2508WRD-17P	40.00	44.90
A2508WRD-18P	42.50	47.40
A2508WRD-19P	45.00	49.90
A2508WRD-20P	47.50	52.40

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	2.5:1	1 of 1	2.50mm PITCH RIGHT-ANGLE WAFER
DRAWN	CHK'D	APPR	
Chengbiao Ye	Djankui Wan	Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			DRAWING NO. A2508WRD-XP
			REV A1