
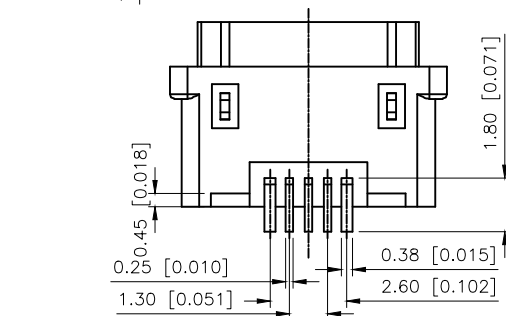

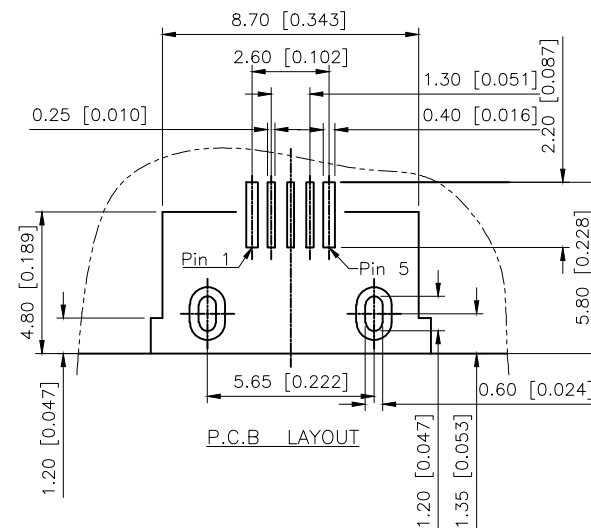
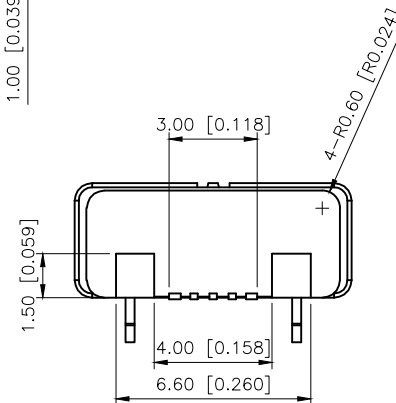
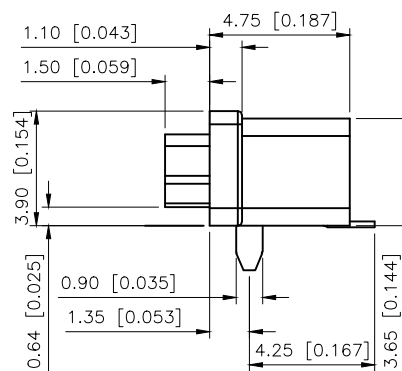
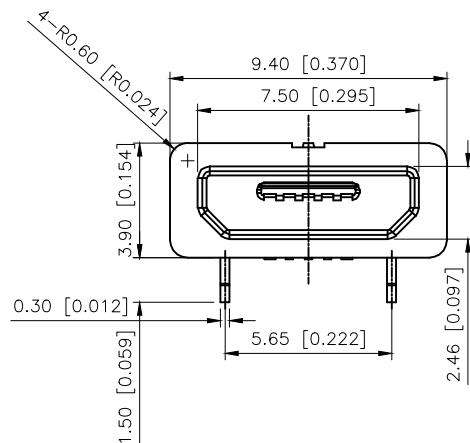
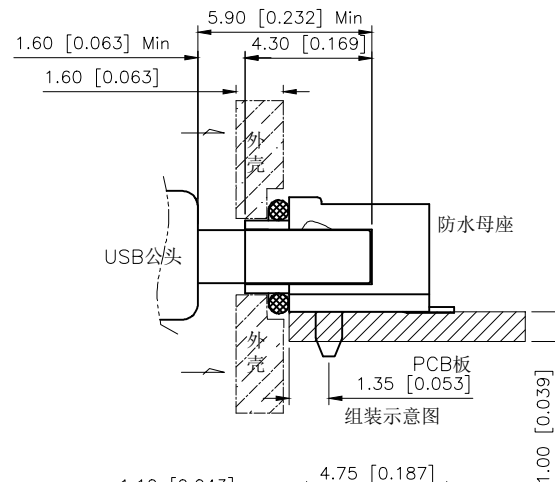


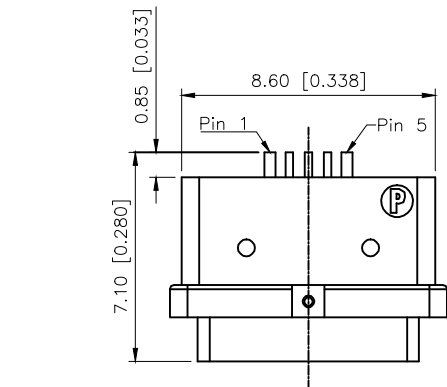

Notes:

1. Dimension shall be interpreted per ASME Y14.5M1994
2. Dimension marked  should be checked by Q.C. and process, engineers and  should also check the CPK data 

Specification:

- 1.Current Rating: 2.0 AMP
2. Voltage Rating:30V AC,DC
3. Dielectric Strength: 500V AC RMS for 1 minute
- 4.Contact Resistance:30mΩ Max.
5. Insulator Resistance:500M 2Min.AT 250V DC.
6. Mating/Unmating cycles:2000cycles
7. Temperature:-20°Cto+60°C

	REVISIONS				
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.03.10	阿树

3	Shell	1	SUS304R-1/2H Ni PlatingT=0.30mm(3U)
2	Contact	5	Phosphor bronze C5191R-EH Au/Ni Plating T=0.20mm (1U)
1	Housing	1	PA9T&LCP (G.F30%)
ITEM	PART NAME	Q'TY	FINISH

AuGLAR	$\pm 5^\circ$
X.	± 0.40
X.x	± 0.30
X.xx	± 0.20
X.xxx	± 0.15
UNSPECIFIED TOLERAuCES	

XKIB 星城 Connection

DESIGN	阿树	VIEW: 	MODEL TYPE: MICRO USB
CHECKED		UNIT: mm/in	PART NO.: U-E-M5SS-W-3
APPROVED		SIZE: A4	DWG NO.:

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A1