






Rating	16A 12VDC 	Mounting Hole 	Circuit Diagram 
Contact Resistance	50m ohm Max.		
Insulation Resistance	DC 500V 100M ohm Min.		
Dielectric Strength	AC 1500V 1 minute		
Operation Temperature	-25°C~85°C		
Switch Function	3P SPST ON-OFF (LED dependent)	Thickness X Y 0.75...1.5 19.4-0.1 13+0.1 1.5...2.5 19.8-0.1 13+0.1	

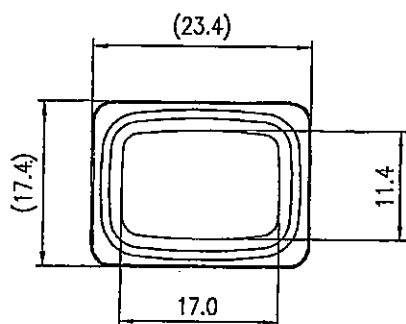

Material:




Frame: Black, Nylon 66 (94-V2)

Actuator: Green clear, PC (94-V2)



Hot stamping: None

Waterproof: IP65

LED: Green

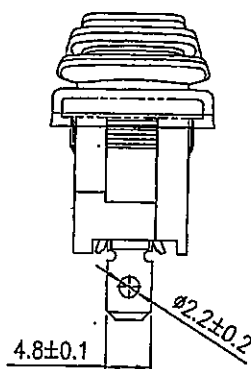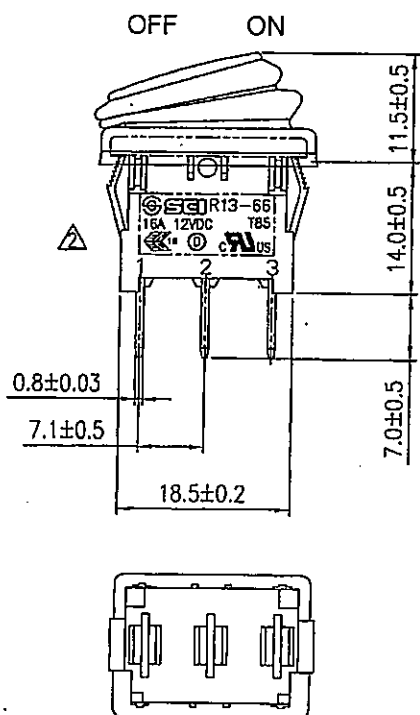

Tolerances ±0.3 Unless Otherwise Specified

5/7/16	周傑輝	DC 幾種使用DC本體更新刻字					
10/02/09	曹盈芳	更正本體Rating刻字					
Date	Name	Description				NO	
Drawn	Checked	Approved	SCI BOM No.	1823920	Model Name	ROCKER SWITCH	
周傑輝			Customer No.		Model No.	R13-66B8-02	Rev.
5/7/16	5/27/16	5/27/16	Unit	mm	 Shin Chin Industrial Co., Ltd.		0