


Actuator

704.120.018

Distribution by
DigiKey

DigiKey

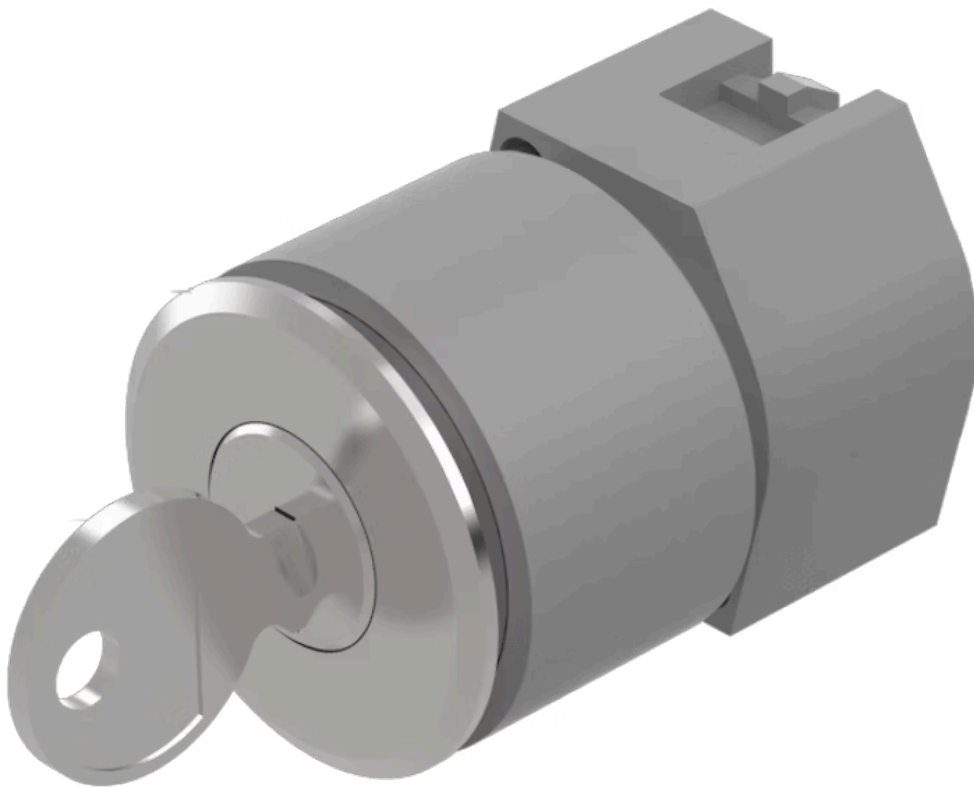

<https://digikey.eao.com/p/704.120.018>

Your product:



704.120.018 Actuator

FRONT

Front dimension:	Ø 35 mm
Front bezel material:	Aluminium
Front bezel colour:	Nature

MOUNTING

Design:	flush
Mounting cut-out:	Ø 30.5 mm

ELECTRICAL CHARACTERISTICS

Standards:	The switches comply with the "Standards for low-voltage switching devices" DIN EN 60947-1
------------	---

MECHANICAL CHARACTERISTIC

Switching positions:	2 positions
Switching angle:	90° right / -45° ... +45°
Switching action:	Rest - Maintained (a)
Weight:	0.099 kg
Mechanical lifetime:	≤50 000 cycles of operation

AMBIENT CONDITION

Operating temperature: – 40 °C ... + 55 °C

IP Protection: IP65 front side

Storage temperature: – 40 °C ... + 85 °C


OTHER

Short Description: Actuator, Ø 30.5 mm, Ø 35 mm, Nature, Aluminium, Rest - Maintained (a)

max. number of switching elements: 3


Hints: The standard lock Ronis 251, Further lock numbers on request, Max. 3 switching elements can be clipped on

Dimension drawings:

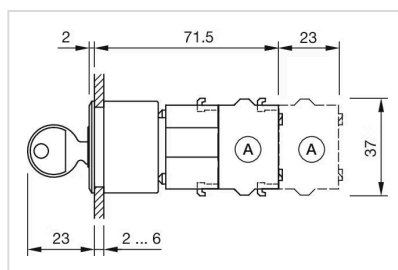

A = Screw terminal

Mounting cut-outs:

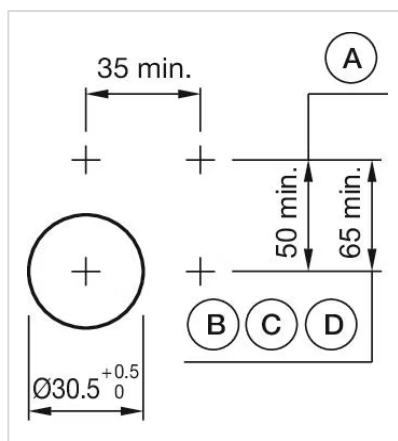

A = Screw terminal
B = Push-in terminal (PIT)
C = Plug-in terminal 6.3 mm x 0.8 mm
D = Double plug-in terminal 6.3 mm x 0.8 mm

Wiring diagrams:



Switching positions:

