




Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors

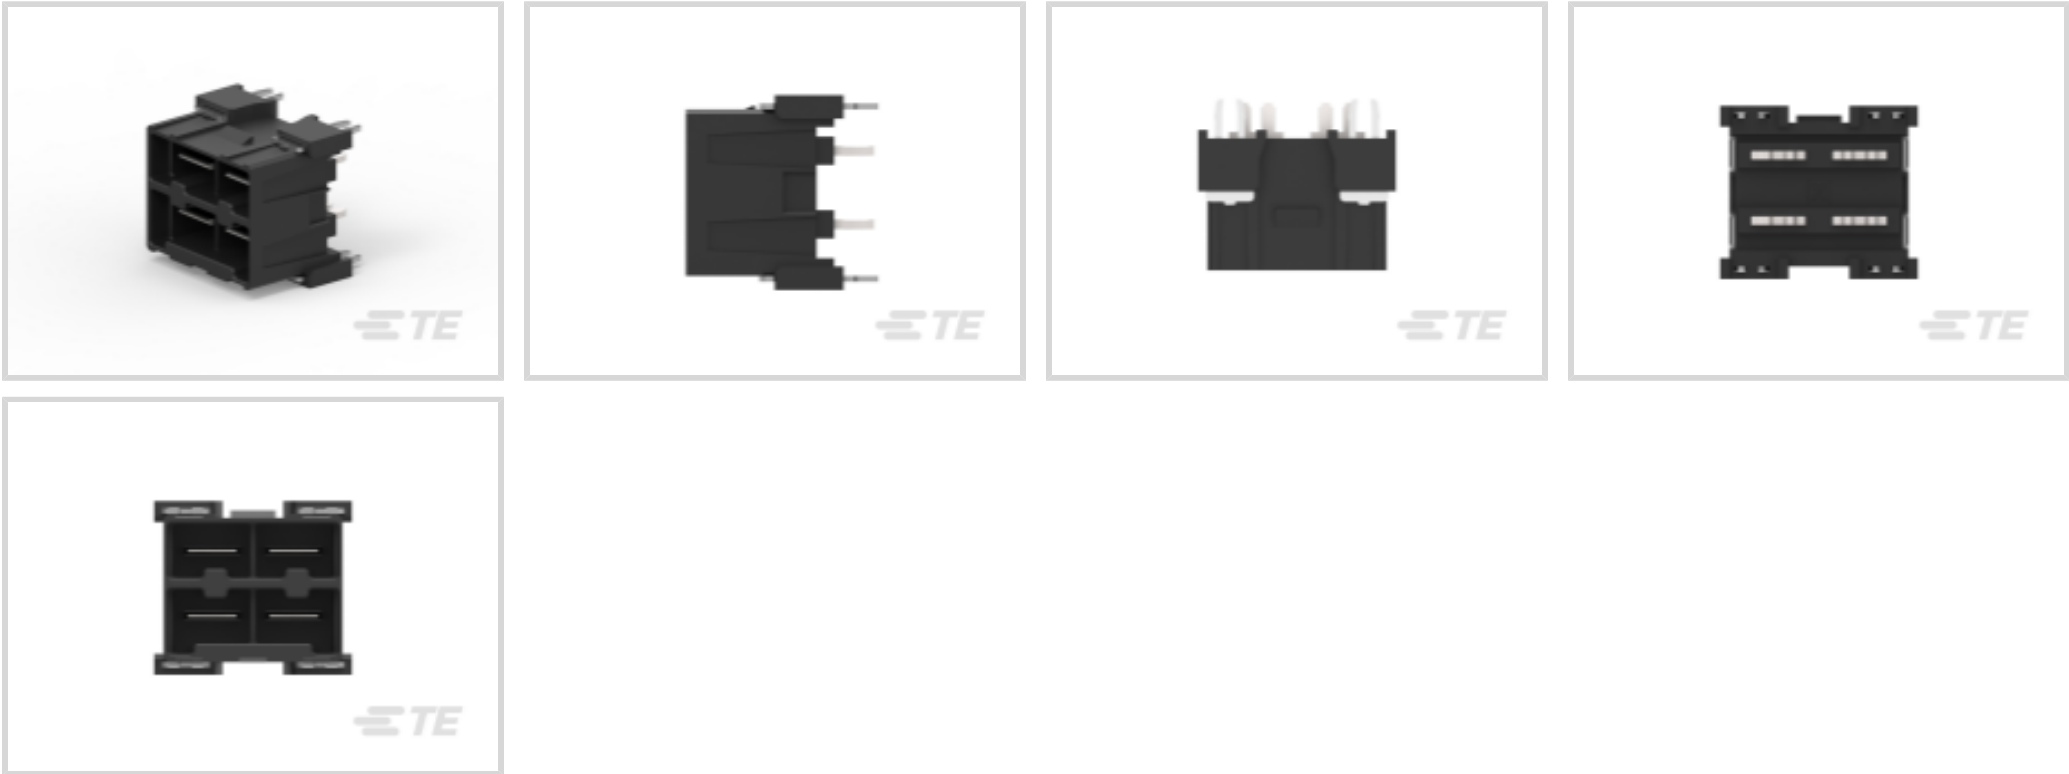

Rectangular Power Connector Type: **Header**

Connector & Housing Type: **Plug**

Connector System: **Wire-to-Board**

Number of Positions: **4**

Centerline (Pitch): **7.8 mm [.307 in]**

Features

Product Type Features

Header Type	Fully Shrouded
Rectangular Power Connector Type	Header
Connector & Housing Type	Plug
Connector System	Wire-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Number of Positions	4
PCB Mount Orientation	Vertical
Number of Power Positions	4
Number of Signal Positions	0
Number of Rows	2

Electrical Characteristics

Insulation Resistance	1000 MΩ
-----------------------	---------



Operating Voltage	60 VDC
Contact Features	
PCB Contact Termination Area Plating Material Thickness	3 μm[118.1 μin]
Contact Mating Area Plating Material	Silver
Contact Base Material	Copper Alloy
Contact Current Rating (Max)	20 A
Contact Retention Within Housing	With
Contact Type	Tab
PCB Contact Termination Area Plating Material	Silver
Contact Mating Area Plating Material Thickness	3 μm[76.2 μin]
Termination Features	
Termination Post & Tail Length	2.95 mm
Termination Method to PCB	Through Hole - Solder
Mechanical Attachment	
Mating Alignment Type	Polarization
Mating Retention	Without
Mating Alignment	With
PCB Mount Retention	With
PCB Mount Retention Type	Hold-Down
Connector Mounting Type	Board Mount
Housing Features	
Centerline (Pitch)	7.8 mm[.307 in]
Housing Color	Black
Housing Material	LCP GF30 (Liquid Crystal Polymer)
Dimensions	
Connector Height	16.54 mm[.65 in]
Product Length	18.9 mm[.74 in]
Row-to-Row Spacing	6.24 mm[.246 in]
Usage Conditions	
Operating Temperature Range	-40 – 125 °C[-40 – 257 °F]
Operation/Application	
Circuit Application	Power



Industry Standards

UL Flammability Rating	UL 94V-0
Glow Wire Rating	Standard Part - Not Glow Wire

Packaging Features

Packaging Quantity	1
Packaging Method	Reel

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Pin-in-Paste capable to 260°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 2173200-1
ELCON MINI 4P CABLE CONN,TRAY
PACKAGED

TE Part # 2173200-2
ELCON MINI 4P CABLE CONN

Also in the Series

ELCON Mini

Insertion & Extraction Tools(1)

Rectangular Power Connectors(32)

Customers Also Bought

TE Part #5-2176230-5
3522 27K 5% 3W

TE Part #9-2176231-2
3522 62K 1% 3W

TE Part #1982299-4
ELCON MINI 2P CABLE CONN,W/O
CODING

TE Part #1551574-5
Shield Finger, Loose Piece

TE Part #2-111196-6
014 RCPT SYSTEM 50 30 DPLX

TE Part #6-104069-0
14 sys 50 hdr drra shrd sn

TE Part #85829-2
02 MODI HDR SRST .156CL

TE Part #2391170-4
MB Lite,R/A,REC,SOLDER,4P+25S+3LP

TE Part #7-6450831-5
MBXL R/A HDR12S+2P+12LP



Documents

Product Drawings

ELCON MINI 4P VERT HEADER,UNSHIELDED,SOL

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2173132-1_B.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2173132-1_B.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2173132-1_B.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

ELCON Mini Power Interconnects QRG (English)

English

Product Specifications

Application Specification

English

Agency Approvals

UL

English