

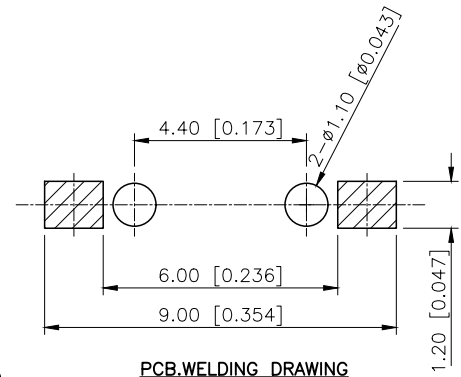
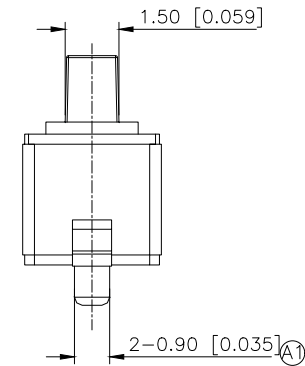
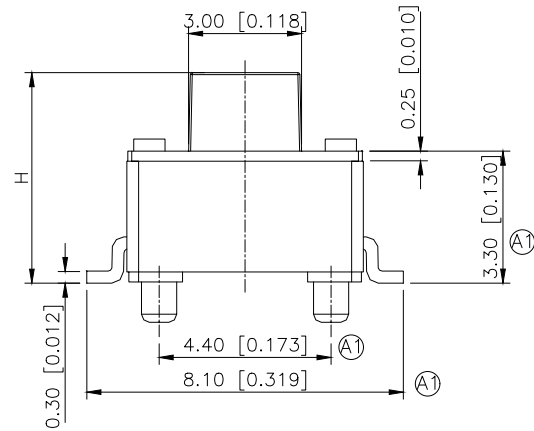
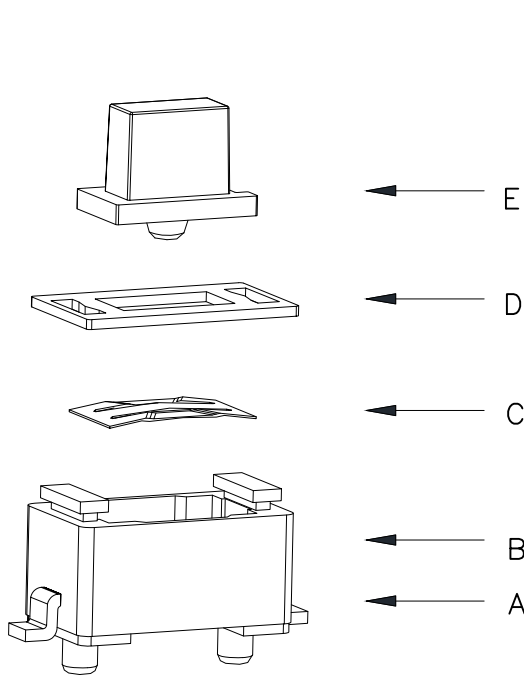


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A	(A1)X5	产品尺寸变更, 图面升级整理图面	2025.06.04	阿树




PCB.WELDING DRAWING

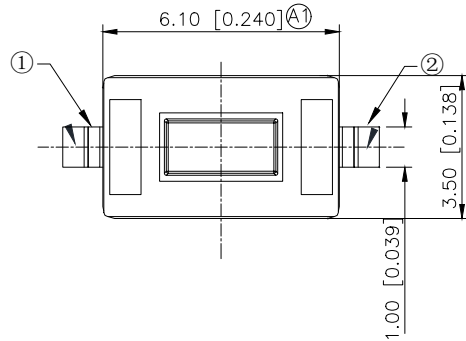

PAPT NO	TS-1101S-X-X-A-X-X
Operating Force	A:100gf B:160gf C:260gf
Height	H:A:4.3 B:5.0 C:6.0 D:7.0
Fixed column	A:With
Color	B:black W:white

主要技术参数、性能
The Main Thchnology Performance

额定电流、电压 Rate voltage,current	50mA DC12V
接触电阻 Contact resistance	≤100mΩ
按力 Operating force	±50gf
行程 Travel	0.20±0.10mm
绝缘电阻 Insulated resistance	≥100MΩ
介电强度 Dielectric strength	≥250VAC/1min



Circuit Diagram

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAUCES	



DESIGN	阿树
CHECKED	
APPROVED	

E	keystroke	1	PPA	White
D	Cover	1		Copper-tin plating
C	Shrapnel	1	SUS	Ag-plating
B	Base	1	PPA	White
A	Terminal	1	Brass	Ag-plating
ITEM	PAPT NAMF	QTY	MATERIAL	FINSH/COLOR

MODEL TYPE:	TACT SWITCH
PART NO.:	TS-1101S-X-X-A-X-X
DWG NO.:	

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A1