

EVVOSEMI[®]

THINK CHANGE DO



ESD



TVS



MOS



LDO



Diode



Sensor



DC-DC

Product Specification

▶ Domestic	Part Number	EV1N4148WT-S6
▶ Overseas	Part Number	1N4148WT
▶ Equivalent	Part Number	1N4148WT

"S6" means SOD-523

EV is the abbreviation of name EVVO


Switching Diodes

FEATURES

- For surface mounted applications
- Fast reverse recovery time
- Ideal for automated placement

PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

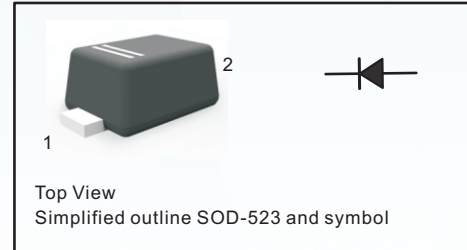

Maximum Ratings at 25 °C

Parameter	Symbols	1N4148WT	Units
Non-Repetitive Peak Reverse Voltage	V_{RM}	100	V
Reverse Voltage	V_R	75	V
Peak Repetitive Reverse Voltage	V_{RRM}		V
Working Peak Reverse Voltage	V_{RWM}		V
RMS Reverse Voltage	$V_{R(RMS)}$	53	V
Average Rectified Output Current	I_O	150	mA
Non-repetitive Peak Forward Surge Current@t= 8.3ms	I_{FSM}	0.8	A
Power Dissipation	P_D	150	mW
Junction Temperature	T_j	150	°C
Storage Temperature	T_{stg}	-55 ~ +150	°C

ELECTRICAL CHARACTERISTICS (Ta=25°C unless otherwise specified)

Parameter	Symbols	Test conditions	Min	Typ	Max	Units
Reverse voltage	$V_{(BR)}$	$I_R = 1 \mu A$	75			V
Reverse current	I_R	$V_R = 75V$			1	μA
		$V_R = 20V$			25	nA
Forward voltage	V_F	$I_F = 1 \text{ mA}$			0.715	V
		$I_F = 10 \text{ mA}$			0.855	V
		$I_F = 50 \text{ mA}$			1	V
		$I_F = 150 \text{ mA}$			1.25	V
Total capacitance	C_{tot}	$V_R = 0V, f = 1MHz$			2	pF
Reverse recovery time	t_{rr}	$I_F = I_R = 10mA, I_{rr} = 0.1 * I_R, R_L = 100 \Omega$			4	ns

Fig.1 Power Derating Curve

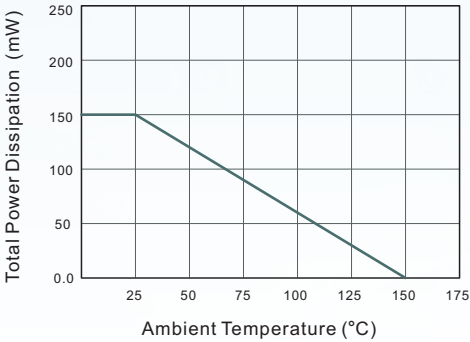


Fig.2 Typical Reverse Characteristics

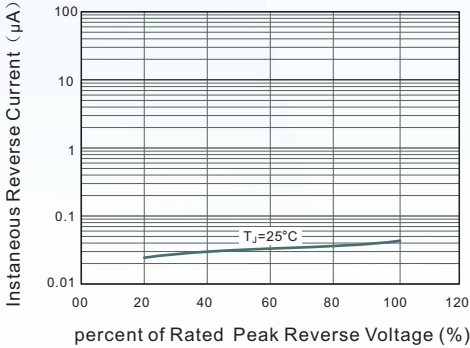


Fig.3 Typical Instantaneous Forward Characteristics


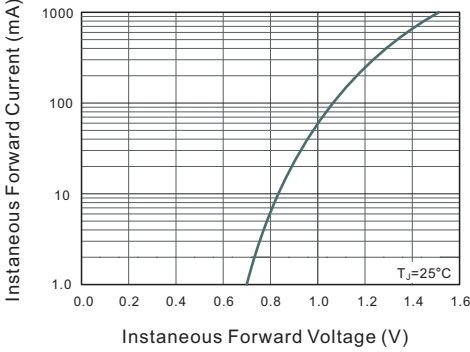



Fig.4 Typical Junction Capacitance

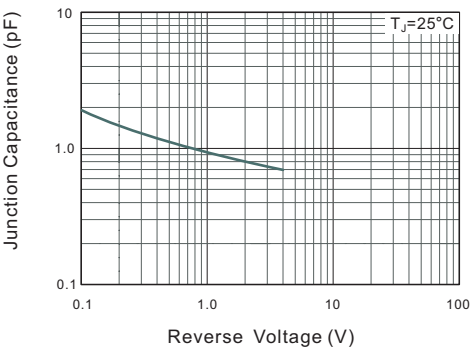


PACKAGE OUTLINE

Plastic surface mounted package; 2 leads

SOD-523

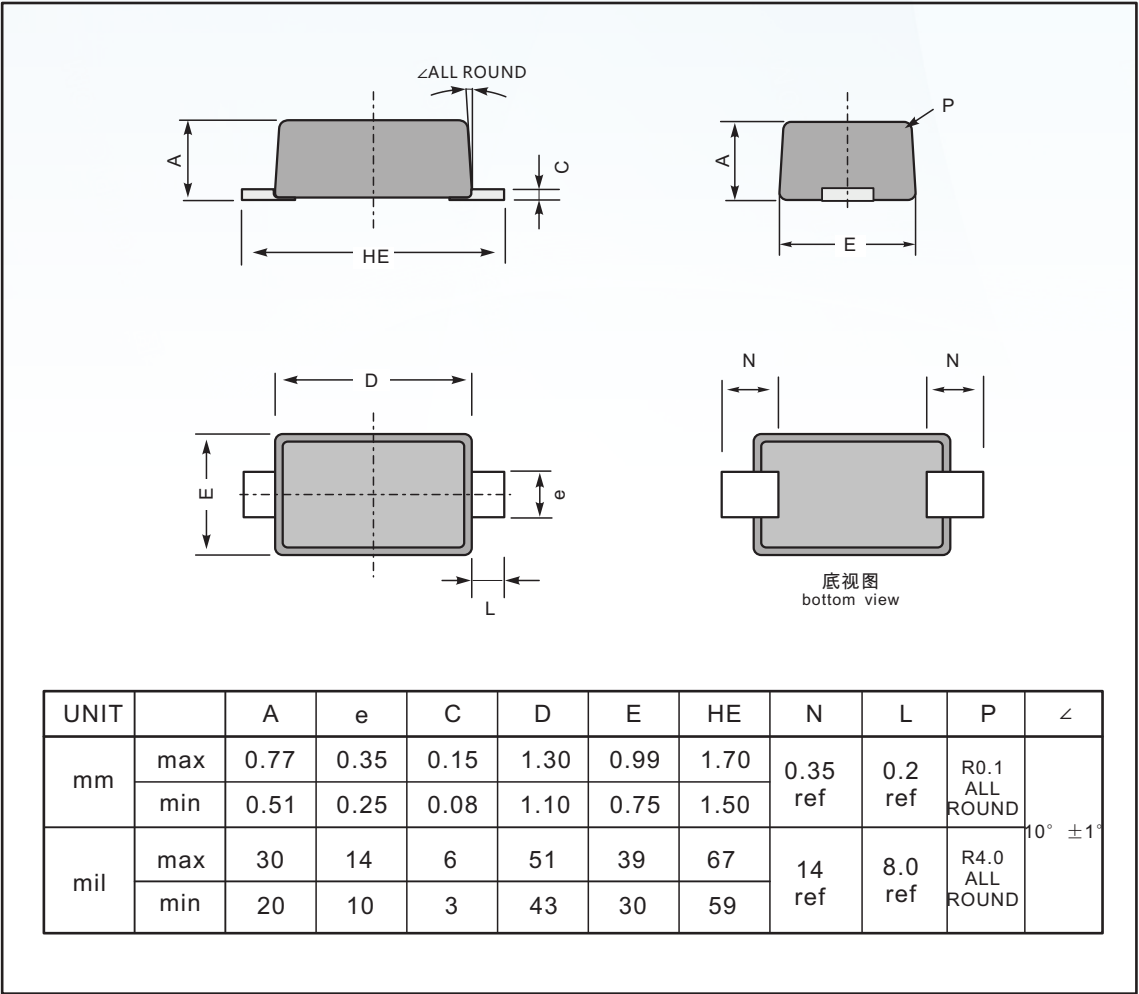

The recommended mounting pad size

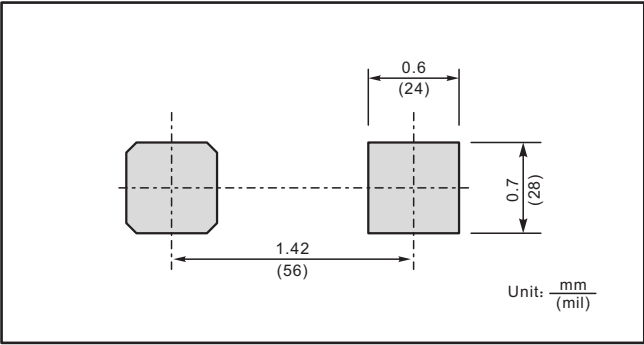

Marking

Type number	Marking code
1N4148WT	T4

Disclaimer

EVVOSEMI ("EVVO") reserves the right to make corrections, enhancements, improvements, and other changes to its products and services at any time, and to discontinue any product or service without notice.

EVVO warrants the performance of its hardware products to the specifications applicable at the time of sale in accordance with its standard warranty. Testing and other quality control techniques are used as deemed necessary by EVVO to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

Customers should obtain and confirm the latest product information and specifications before final design, purchase, or use. EVVO makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does EVVO assume any liability for application assistance or customer product design. EVVO does not warrant or accept any liability for products that are purchased or used for any unintended or unauthorized application.

EVVO products are not authorized for use as critical components in life support devices or systems without the express written approval of EVVOSEMI.

The EVVO logo and EVVOSEMI are trademarks of EVVOSEMI or its subsidiaries in relevant jurisdictions. EVVO reserves the right to make changes without further notice to any products herein.