

This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary

10 W

DC- 4 GHz


BNC

COAXIAL ATTENUATOR

Issue
08.feb.94

Page
1 / 1

DRAWING

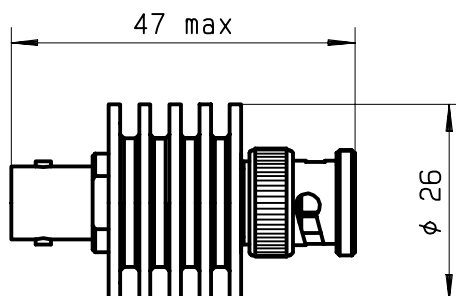

General tolerances: +/- 0.5 mm

R F CHARACTERISTICS

FREQUENCY RANGE : DC - 4 GHz
IMPEDANCE : 50 Ohms
ATTENUATION - NOMINAL : 3 dB

FREQUENCY	DC- 4 GHz
V.S.W.R	<= 1.30
DEVIATION (dB)	+0.5 / - 0.5


TEMPERATURE SENSITIVITY : $4 \times 10^{-4} \frac{\text{dB}}{\text{dB} \times ^\circ\text{C}}$
PEAK POWER at 25°C (1µs,1%) : 250 W
AVERAGE POWER at 25°C : 15 W

MECHANICAL CHARACTERISTICS

CONNECTORS : BNC male/female per MIL-C 39012
WEIGHT : < 70 g

ENVIRONMENTAL CHARACTERISTICS

OPERATING TEMPERATURE RANGE (°C) : -55 , +125
STORAGE TEMPERATURE RANGE (°C) : -55 , +125

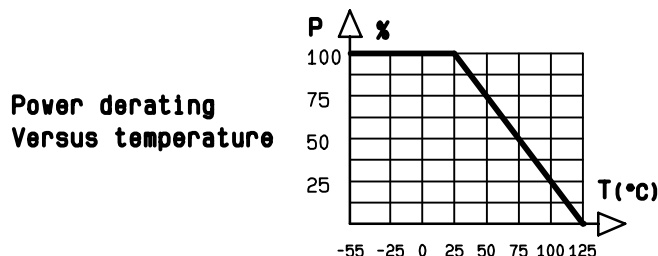

QUALITY
Dpt app. _____

CREATION

PEN : CAT

EP : -----

Nom : VE

Date:08.feb.94

ISSUE

REVISIONS

NAME

RADIALl®

101. Philibert Hoffmann Phone:33.1.49353535
- Z.I Ouest - Fax :33.1.48546363
93116 ROSNY/BOIS Cedex-FRANCE Tvx RADIA 235220F

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Radial:

[R415403000](#)