


製品レイアウト
PRODUCT LAYOUT


コネクタ外形
CONNECTOR OUTLINE

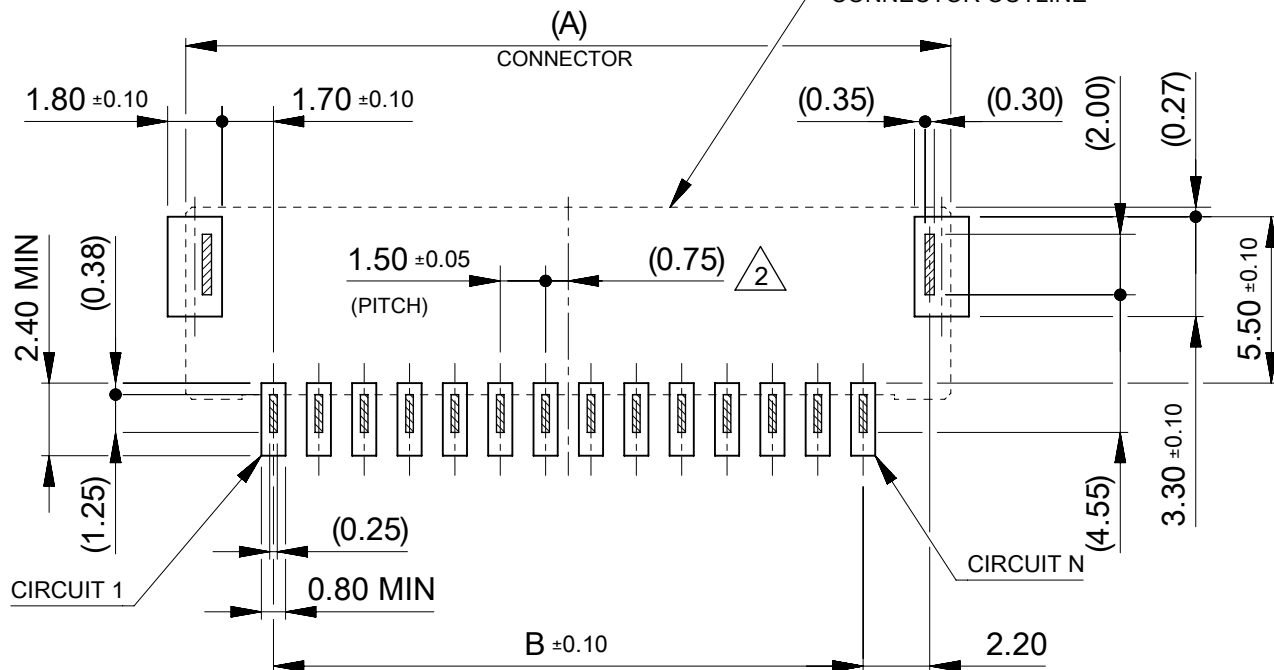

基板レイアウト(参考)



PCB PATTERN LAYOUT (REFERENCE)

(参考 : メタルマスク厚さ 0.10mm, マスク開口率100%)
(REFERENCE: METAL MASK THICKNESS 0.10mm, APERTURE RATIO 100%)

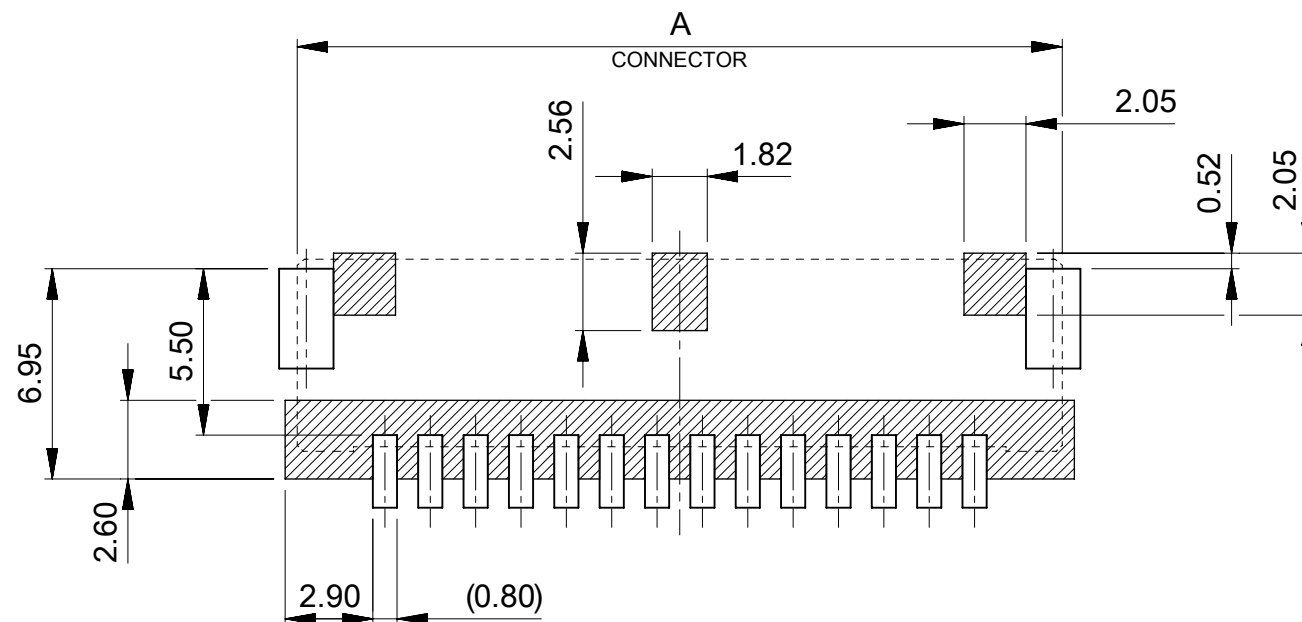

パターン非推奨エリア

パターンを引き回す際は、製品機能に影響がないことをご確認ください。
PATTERN IS NOT RECCOMENDED ON THE HATCHED AREA.
PLEASE CHECK NOT TO HAVE PROBLEM FOR PRODUCT FUNCTION
WHEN SETTING PATTERN ON THE HATCHED AREA.



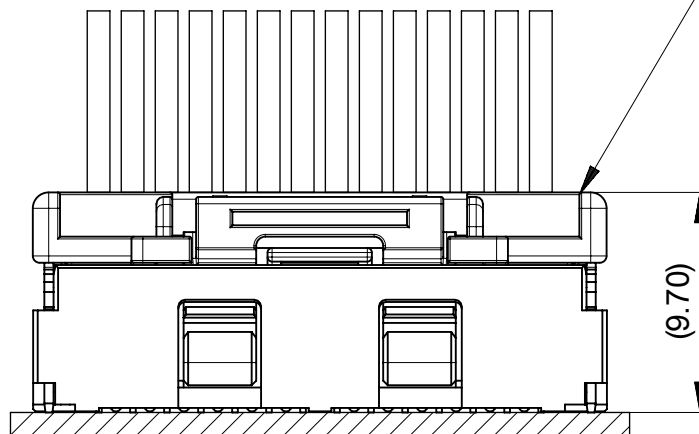
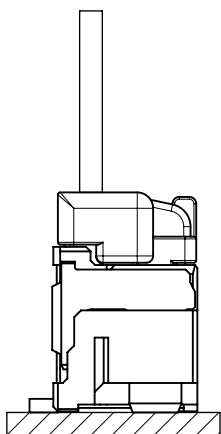


MATED CONNECTORS

嵌合相手 : 502578 シリーズ
MATE WITH : 502578 SERIES

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION														
DIMENSION UNITS		SCALE		CURRENT REV DESC:				molex						
mm		NTS												
GENERAL TOLERANCES (UNLESS SPECIFIED)				EC NO: 742719 DRWN: MIKEDA012023/06/23 CHK'D: SAKIYAMA2023/06/23 APPR: AIDA2023/06/23										
ANGULAR TOL ± 3.0 °														
4 PLACES		± 0.2												
3 PLACES		± 0.2												
2 PLACES		± 0.2		PRODUCT CUSTOMER DRAWING										
1 PLACE		± 0.2												
0 PLACES		± 0.2		DOCUMENT NUMBER		DOC TYPE		DOC PART	REVISION					
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES		2132250000-SD		PSD	000	F
										MATERIAL NUMBER		CUSTOMER		SHEET NUMBER
						A3-SIZE		213225		GENERAL		2 OF 6		

ロック形状および吸着エリア
LOCK SHAPE AND VACCUME AREA

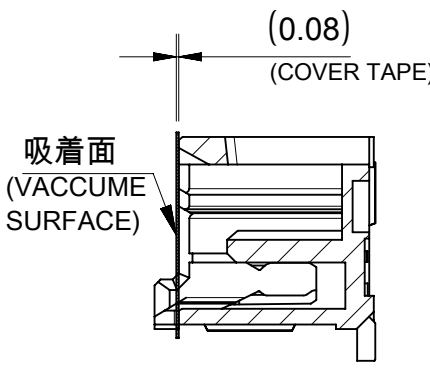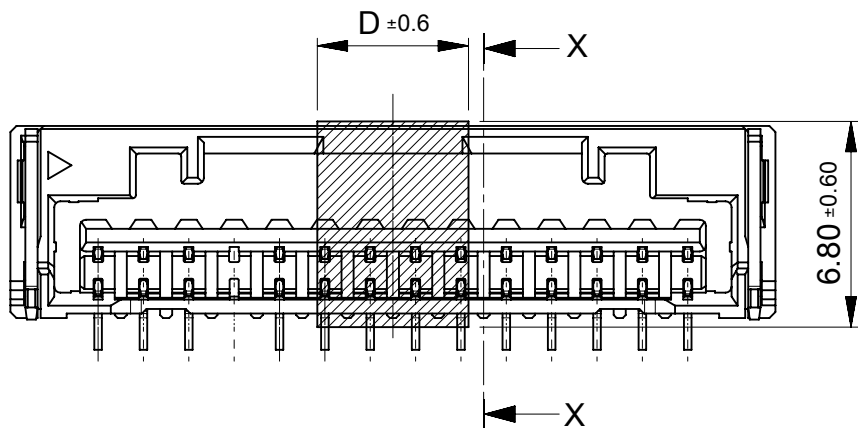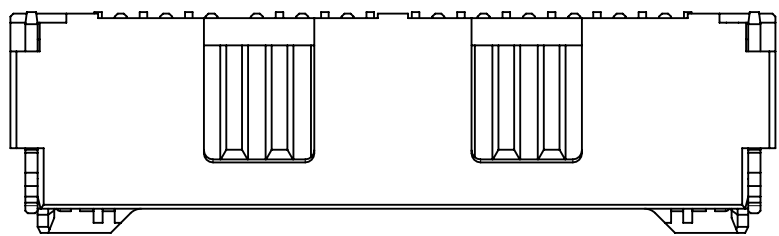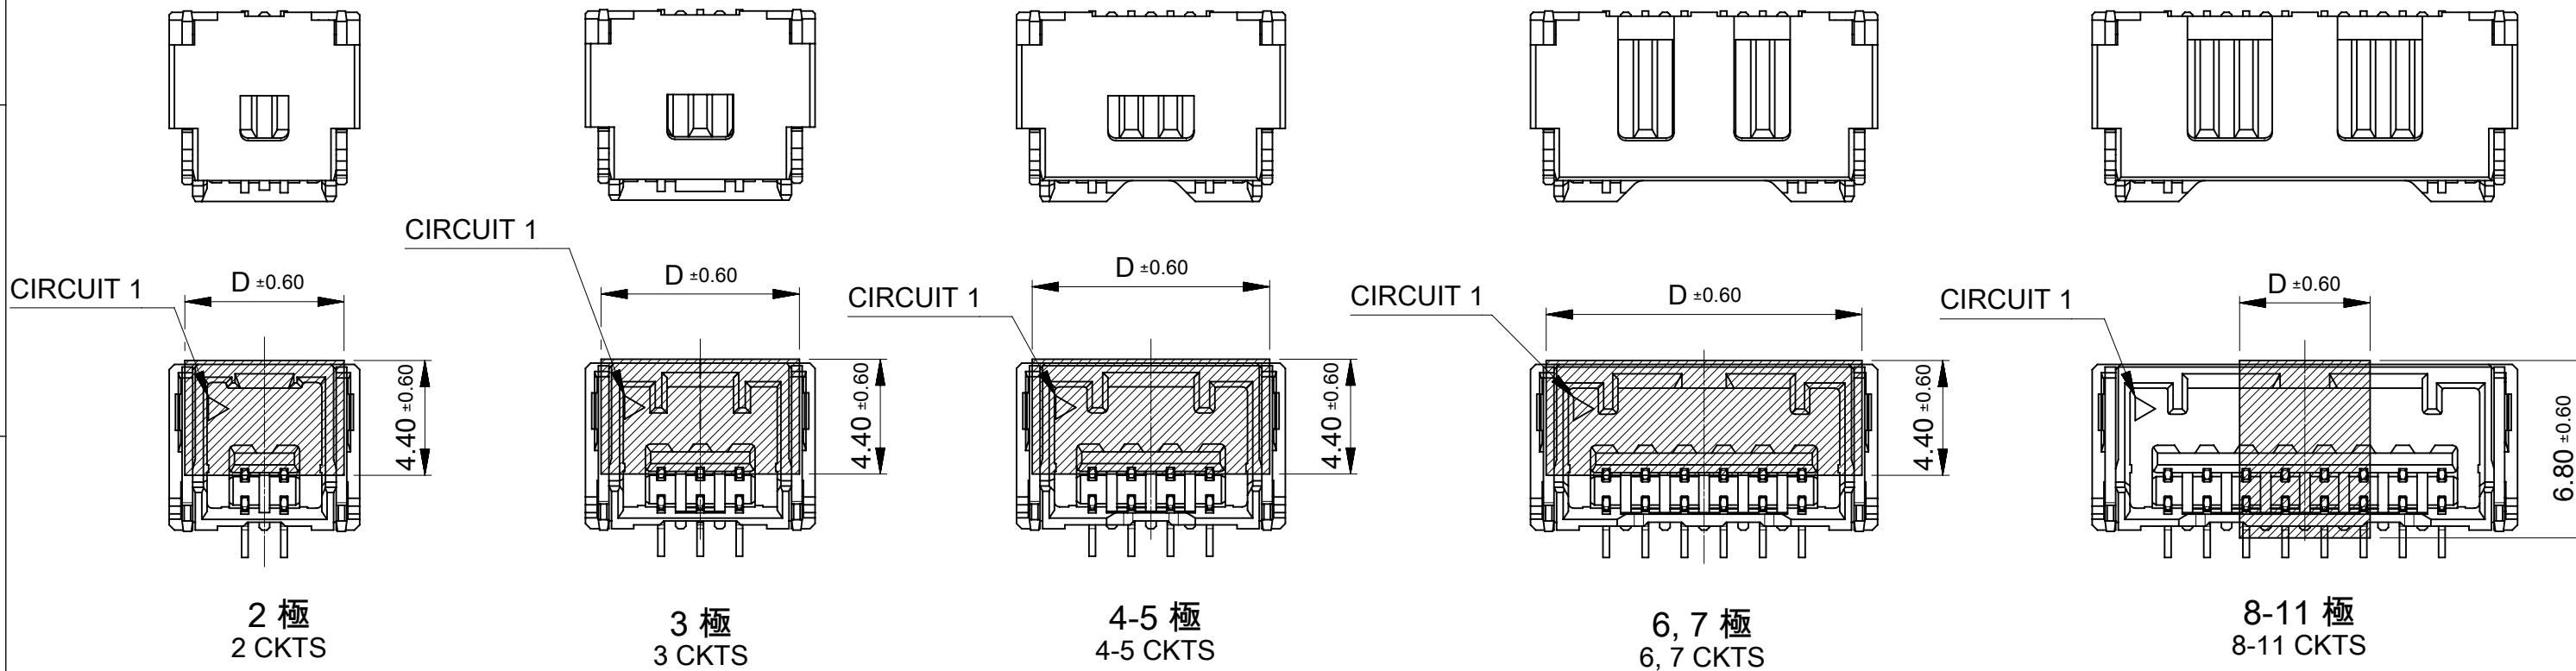


SECTION X-X

12-15 極
12-15 CKTS

5.0	15
	14
	13
	12
	11
	10
	9
	8
13.6	7
12.1	6
10.6	5
9.1	4
7.6	3
6.1	2
D	極数 CKT NO

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
CURRENT REV DESC:	
molex	
CLIK-MATE 1.5 SINGLE ROW SMT VT TYPE REC ASSY GOLD PLATING	
PRODUCT CUSTOMER DRAWING	
DOCUMENT NUMBER: 2132250000-SD	
DOC TYPE: PSD	
DOC PART: 000	
REVISION: F	
SHEET NUMBER: 3 OF 6	

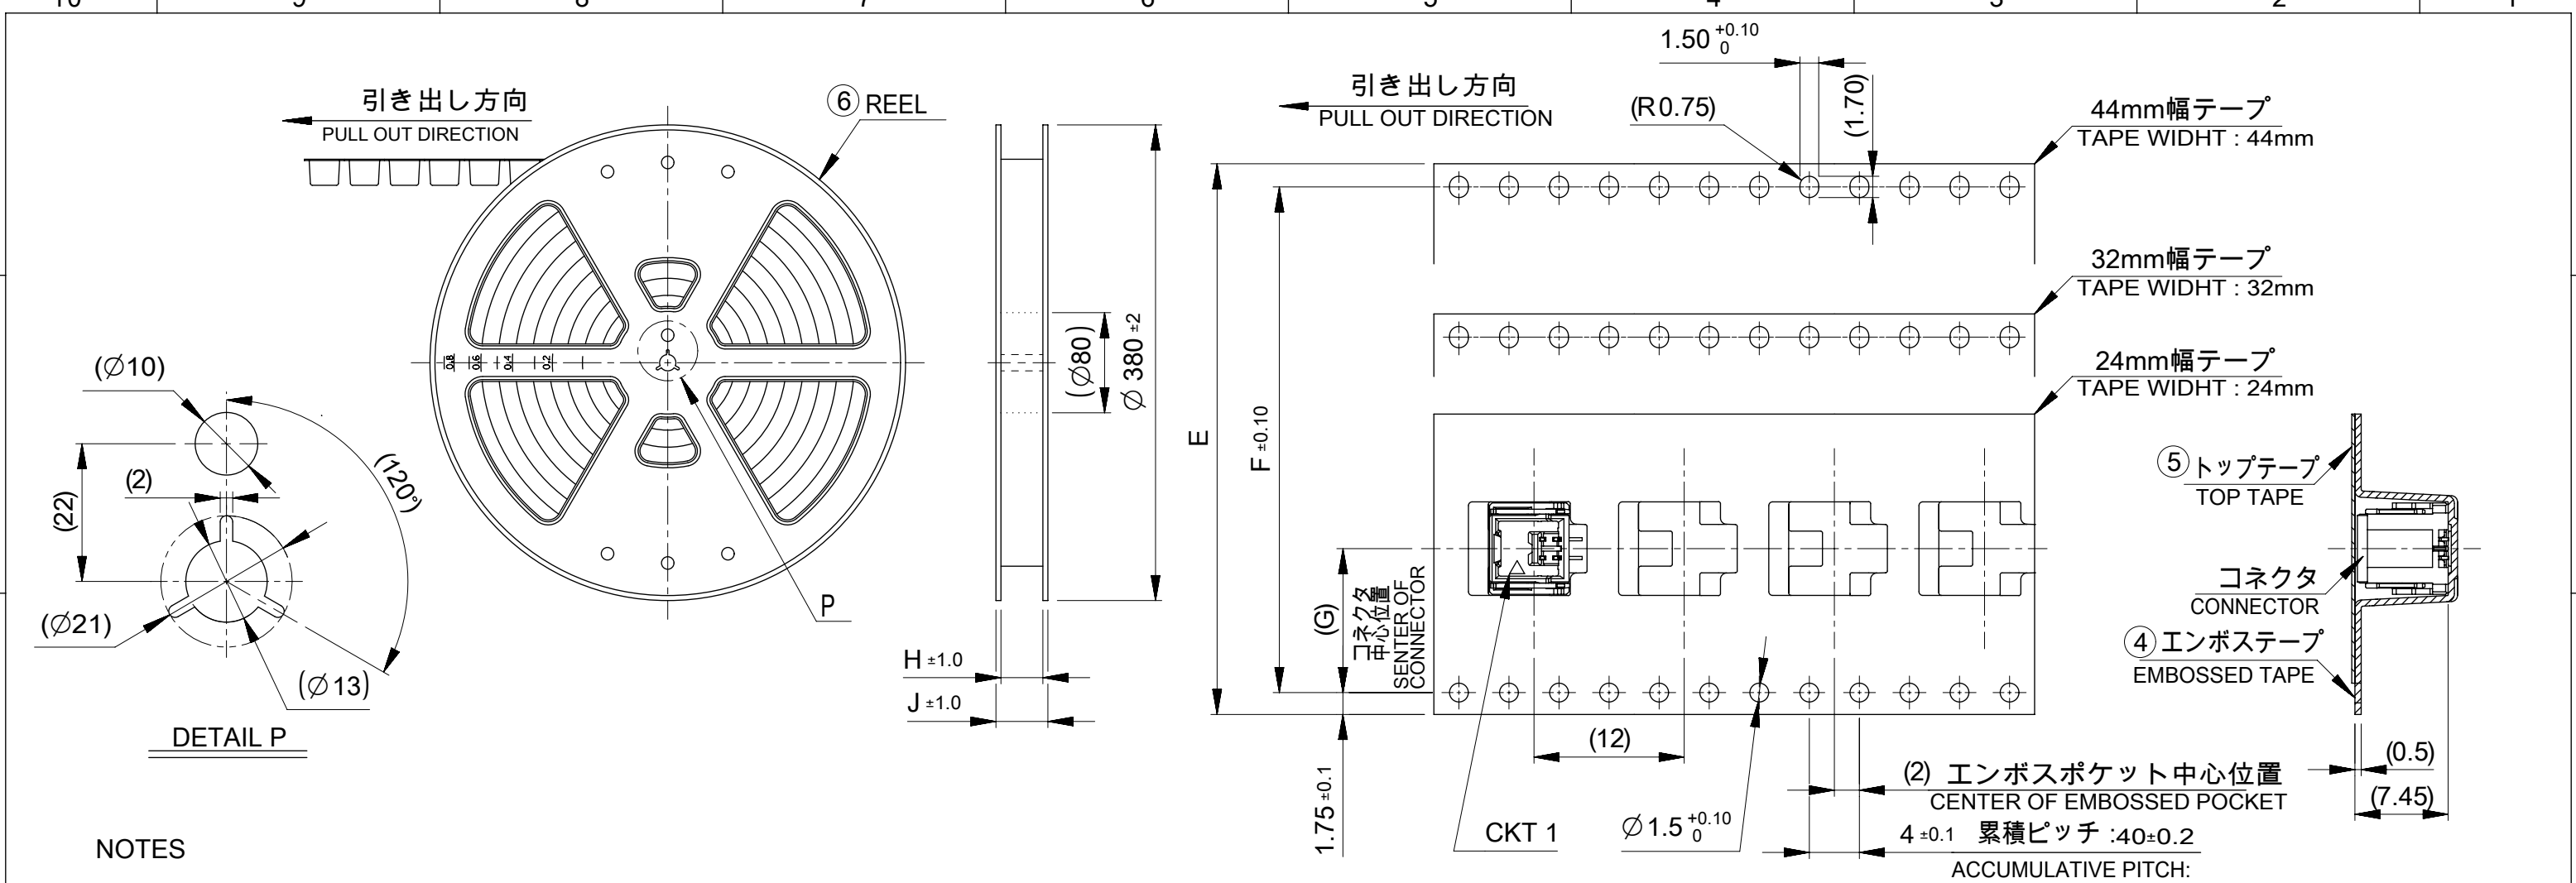

NOTES

5. 梱包数量 : 900個/リール
NUMBER OF CONNECTORS : 900 PIECES/REEL

6. リードテープ長さ
LEAD TAPE LENGTH

トップテープ接着部(空エンボス)
20 PIECES MIN.
TOP TAPE BONDED PART(EMPTY)

引き出し方向
PULL OUT DIRECTION


部品挿入部
COMPONENT
SUPPLIER

末端部(空部)
TAIL PART
(EMPTY)
100 MIN.

400 MIN.

7. トップテープの剥離強度はJIS C0806-3に準拠。
TOP TAPE PEELING FORCE IS DEFINED BY JIS C0806-3.

8. 本製品は乾燥剤入り、ハイバリア梱包である。
THIS PRODUCT IS DELIVERD IN HIGH BARRIER PACKAGE WITH DESICCANT.

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION													
DIMENSION UNITS		SCALE		CURRENT REV DESC:				molex					
mm		NTS											
GENERAL TOLERANCES (UNLESS SPECIFIED)								EC NO: 742719 DRWN: MIKEDA01 2023/06/23 CHK'D: SAKIYAMA 2023/06/23 APPR: AIDA 2023/06/23					
ANGULAR TOL		± 3.0 °											
4 PLACES		± 0.2		INITIAL REVISION: DRWN: MIKEDA01 2019/11/07 APPR: KOMURAKAMI 2019/11/20				DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION	
3 PLACES		± 0.2						2132250000-SD				PSD	000
2 PLACES		± 0.2		THIRD ANGLE PROJECTION				MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
1 PLACE		± 0.2						A3-SIZE		213225		GENERAL	
0 PLACES		± 0.2				DRAWING		SERIES					
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS													

番号 NO.		部品 PART		材質 MATERIAL	
④		エンボステープ EMBOSSSED TAPE		ポリスチレン(PS) POLYSTYRENE(PS)	
⑤		トップテープ TOP TAPE		ポリエチレン、ポリエチレンテレフタレート POLYETHLENE(PE), POLYETHYLENE TEREPTHALATE(PET)	
⑥		リール REEL		ポリスチレン(PS) <リサイクル材を含む> POLYSTYRENE(PS) <RECYCLE MATERIAL CONTAINED>	

DOCUMENT STATUS		P1	RELEASE DATE	2023/06/23	10:36:34
-----------------	--	----	--------------	------------	----------

