


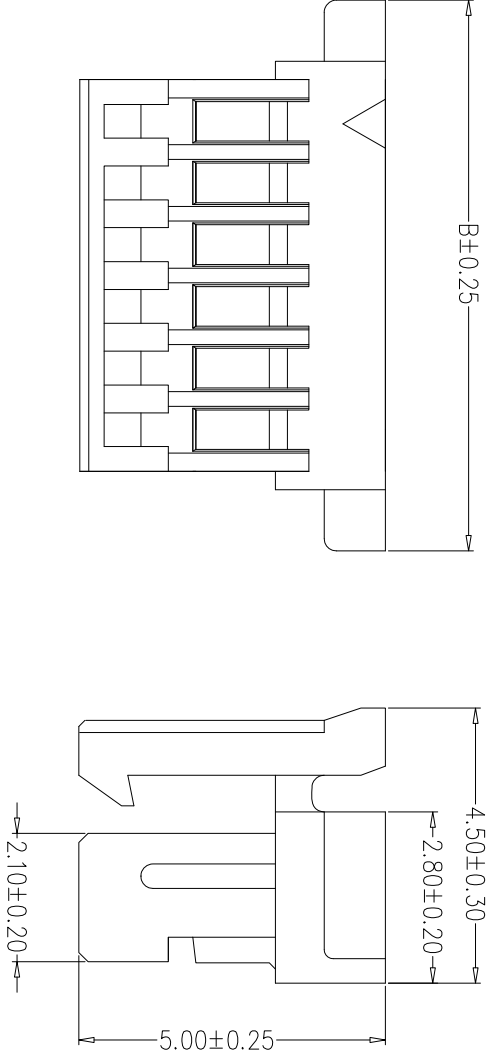

SPECIFICATIONS

1、Current Rating: 1A AC, DC

2、Voltage Rating: 50V AC, DC

3、Temperature Range: -25°C~+85°C


4、Contact Resistance: 20mΩ Max

5、Insulation Resistance: 100MΩ Min

6、Withstanding Voltage: 500V AC/minute

7、Material:Nylon66, UL94V-0

编 号	尺寸 (mm)	
	A	B
A1006-02Y	1.00	5.00
A1006-03Y	2.00	6.00
A1006-04Y	3.00	7.00
A1006-05Y	4.00	8.00
A1006-06Y	5.00	9.00
A1006-07Y	6.00	10.00
A1006-08Y	7.00	11.00
A1006-09Y	8.00	12.00
A1006-10Y	9.00	13.00
A1006-11Y	10.00	14.00
A1006-12Y	11.00	15.00
A1006-20Y	19.00	23.00

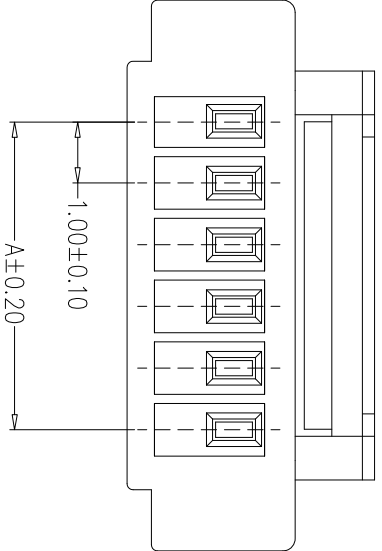

	单位	mm	深圳市泰华电子有限公司 <i>TaiHua Electronics Co., Ltd</i>	
	比例			
	SCALE			
	批准:	版本: A0	产品名称	
. X. ±0.5		X. ° ±	Production name	1.0代钩孔座
. X ±0.30		. X ° ±	APPROVED BY	
. XX ±0.20		. XX ° ±	审核:	
. XXX ±0.005, XXX ° ±		. XXX ° ±	CHECKED BY	产品料号
			制图:	Product No
			封文辉	TH-A1006-NV
			2023.01.31	
			客户料号	
			Client No	