


HLT62040200R

50MHz~40GHz 620nH Inductor

技术参数 (Technical Parameter) :

产品名称 (Product Name)	型号 (Part Number)	频率范围 (Frequency Range)	电感量 (nH)	最大承受电流 (mA)	线径 (mm)	工作温度 (℃)
锥形电感 (Conical Inductor)	HLT62040200R	50MHz~40GHz	620±20%	200	0.05	-55~+125

外形尺寸 (Dimension) :

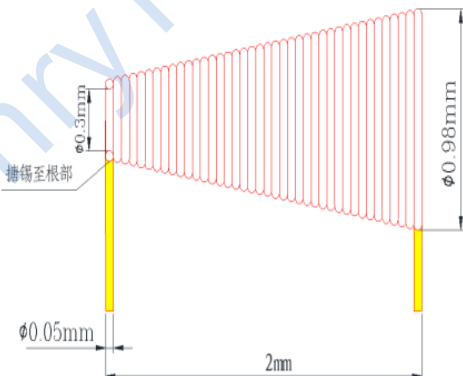

备注:

- 1、储存条件(Storage conditions): 温度(Temperature)20~25℃, 湿度(Humidity) 40%-60%;
- 2、适用于带焊工艺 (Suitable for tape welding process) 。

典型测试曲线 (Typical Test Curve) :

