
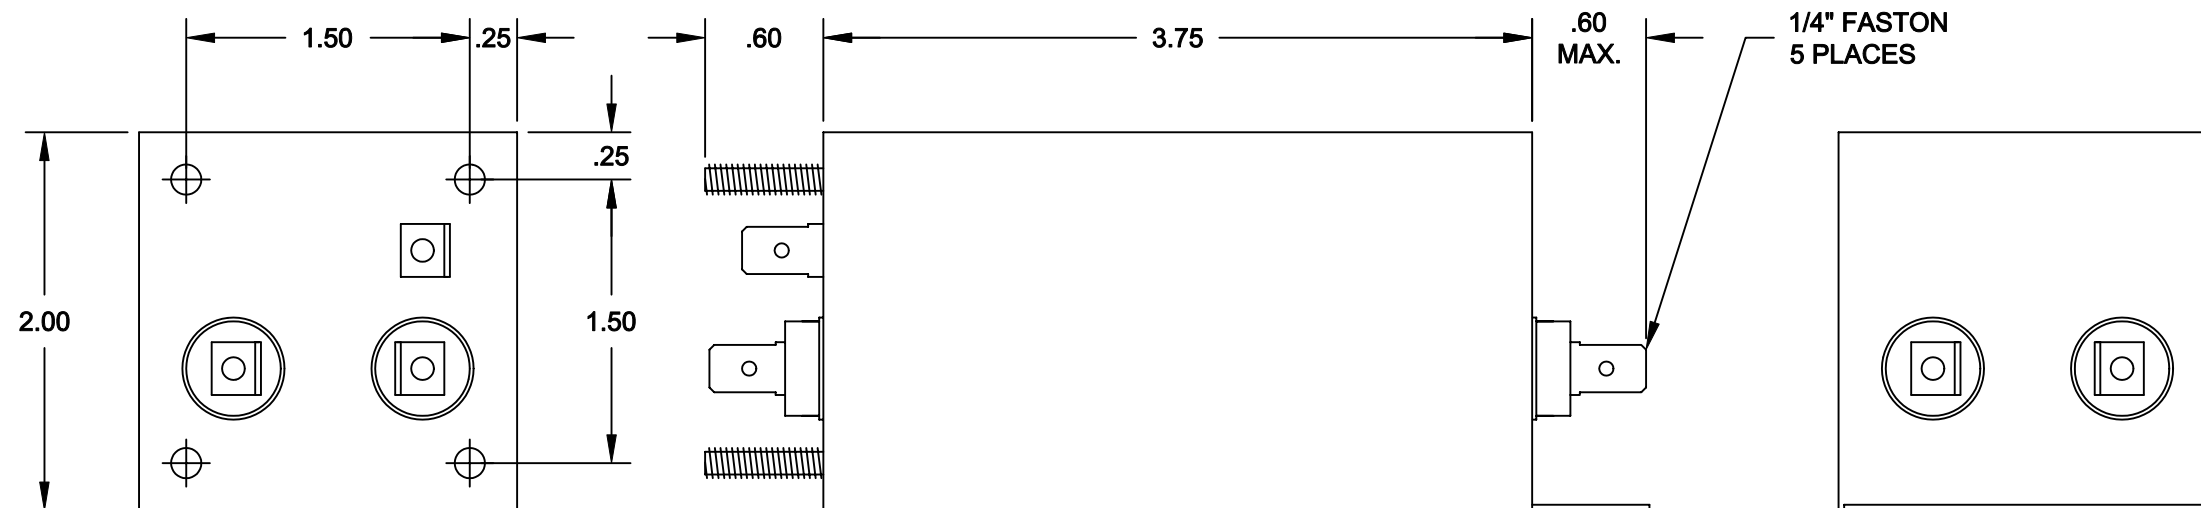


SPECIFICATIONS


1. CASE:
22 GA. (.030) CRS, TIN PLATED
2. RATED CURRENT:
5A
3. RATED VOLTAGE:
250VAC, 50/60Hz
4. TEST VOLTAGE:
LINE TO LINE: 1.7KVDC
LINE TO GROUND: 2.2KVDC
5. LEAKAGE CURRENT:
2.4mA @ 250VAC, 50Hz

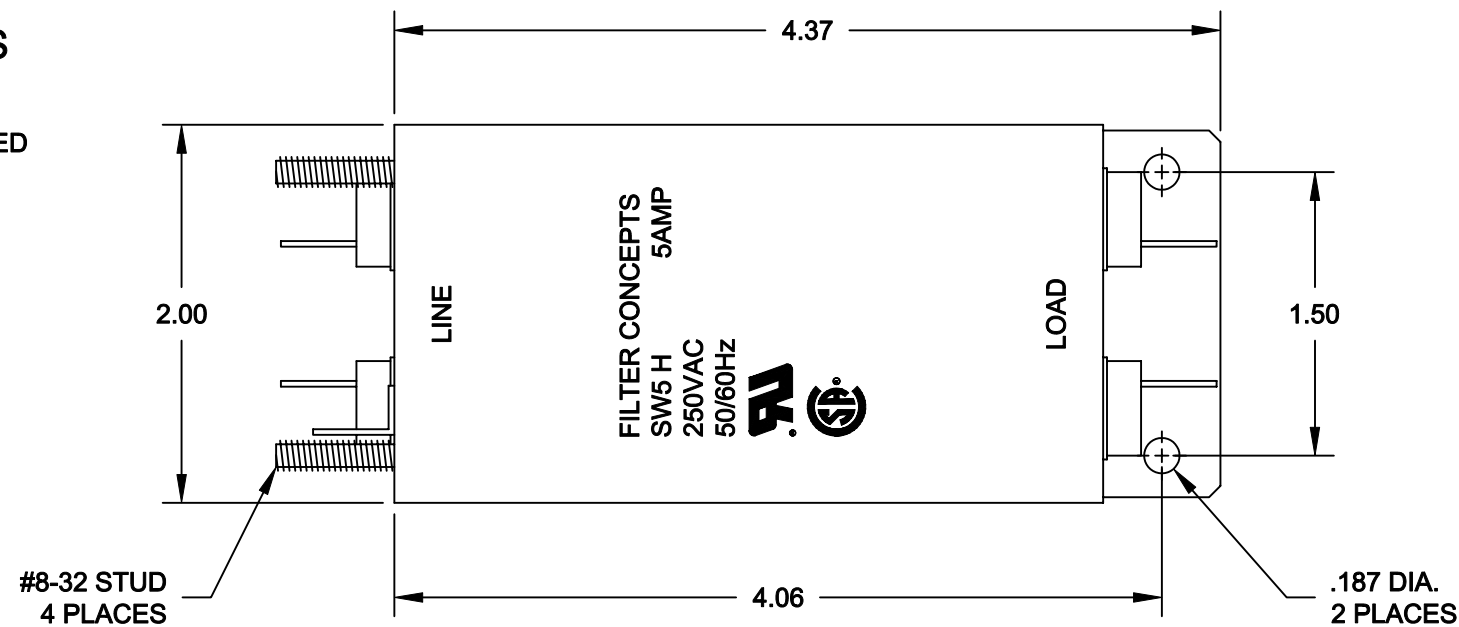

INSERTION LOSS (50 Ω TYPICAL)

	.05 MHz	.15 MHz	1.5 MHz	5.0 MHz	50 MHz	.01 GHz
L/L	45 db	65 db	65 db	65 db	60 db	50 db
L/G	35 db	65 db	65 db	65 db	50 db	50 db

SCHEMATIC

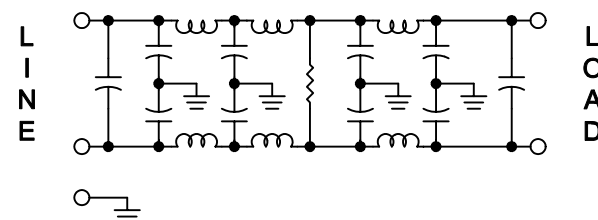

NEXT ASSY	USED ON
APPLICATION	

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ±.030 ± .XXX ±.010	CONTRACT NO.		FILTER CONCEPTS INC.											
	APPROVALS		DATE		APPLICATION DRAWING SW5 H FILTER									
	DRAWN GIANG TRINH		10-15-02											
	CHECKED DANNIEL VUONG		06-02-04											
MATERIAL					SIZE B		CODE IDENT NO.		DRAWING NO. 7684					
FINISH					SCALE 1/1				SHEET 1 OF 1					

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Astrodyne TDI:](#)

[SW5 H](#)