

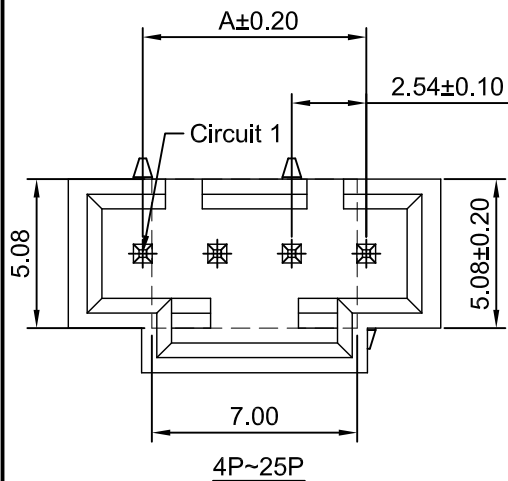





3P

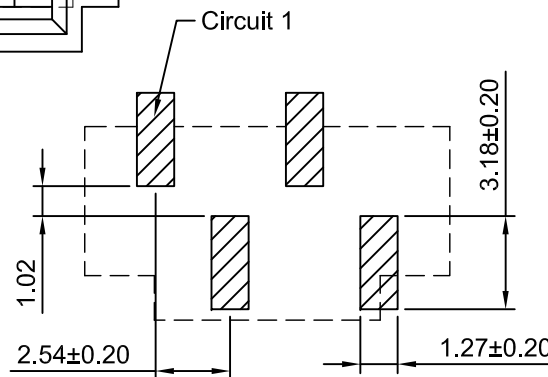

P.C.B LAYOUT

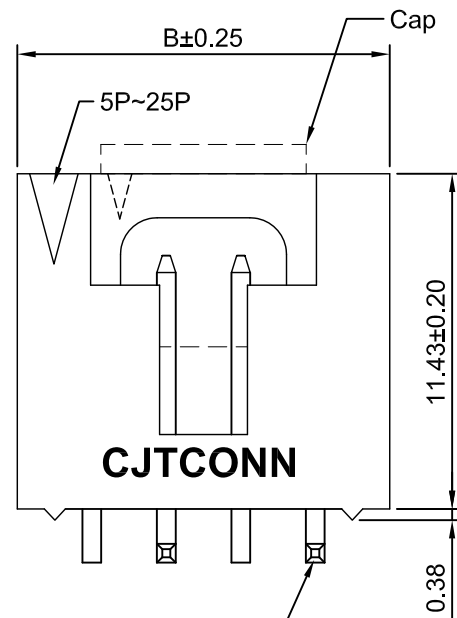

PIN 0.64 SQ

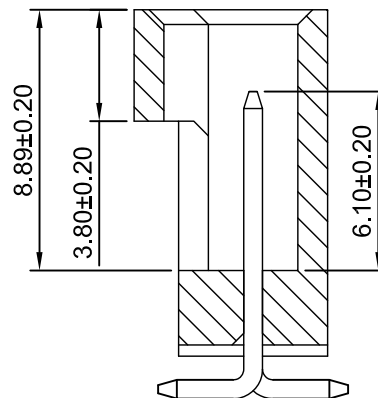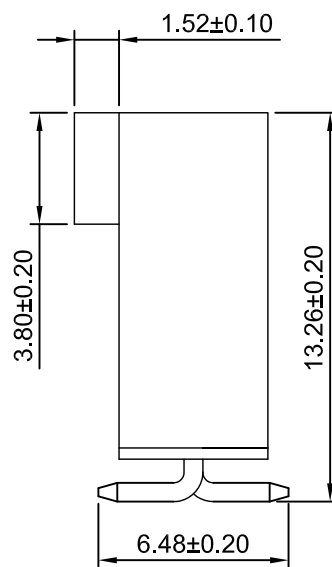

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material: Brass/Gold over Nickel
Material: LCP,UL94V-0 (Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
3P	5.08	10.16	15P	35.56	40.64
4P	7.62	12.70	16P	38.10	43.18
5P	10.16	15.24	17P	40.64	45.72
6P	12.70	17.78	18P	43.18	48.26
7P	15.24	20.32	19P	45.72	50.80
8P	17.78	22.86	20P	48.26	53.34
9P	20.32	25.40	21P	50.80	55.88
10P	22.86	27.94	22P	53.34	58.42
11P	25.40	30.48	23P	55.88	60.96
12P	27.94	33.02	24P	58.42	63.50
13P	30.48	35.56	25P	60.96	66.04
14P	33.02	38.10			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	4:1	1 of 1
DRAWN	CHK'D	APPR
Haisen Li	Djankui Wan	Jack Yin

TITLE	
2.54mm PITCH	
VERTICAL WAFER - SMT TYPE	

General Tolerances		
A1	CHANGE THE DRAWING	2015.01.08
A0	NEW RELEASE	2013.12.13
REV	DESCRIPTION	DATE

DRAWING NO.		REV
A2547WV-S-XP-2		A1