


PART NUMBER	SSF-LXH513GGYD	REV.	A
DATE	E.C.N. NUMBER AND REVISION COMMENTS		REV.
02.04.13	E.C.N. #10BRDR. & REDRAWN/ E.C.N. #11851.		A

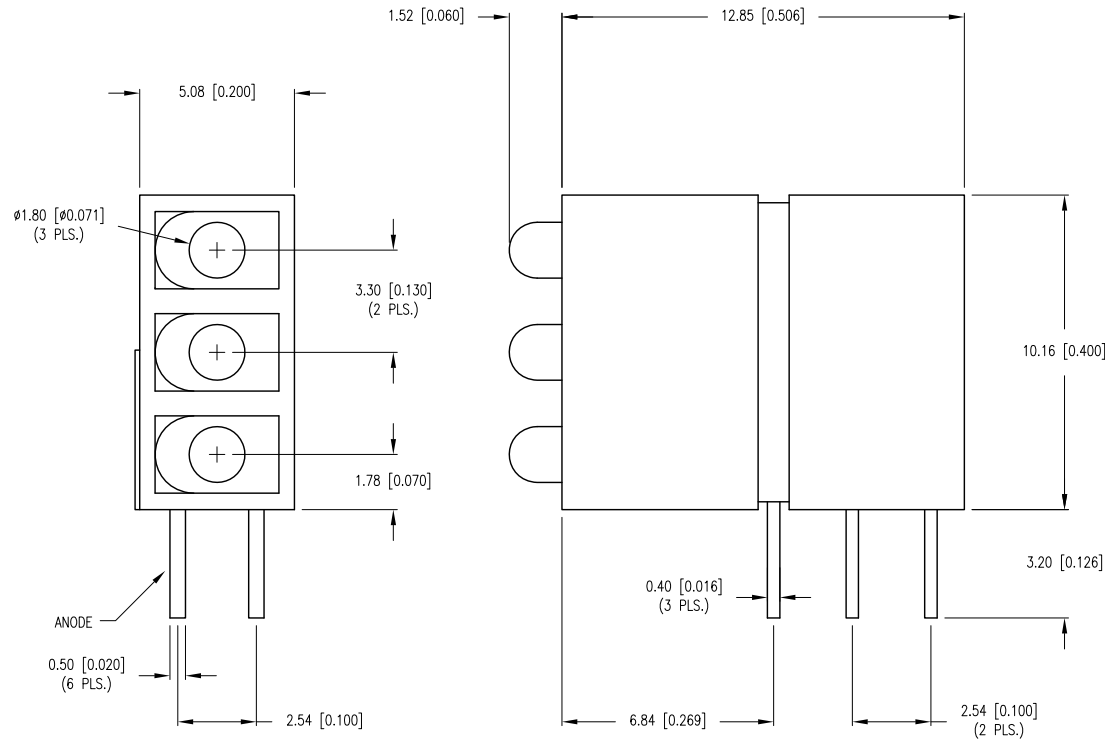

ELECTRO-OPTICAL CHARACTERISTICS Ta=25°C If=20mA				
PARAMETER	GREEN	GREEN	YELLOW	UNITS
PEAK WAVELENGTH	565	565	585	nm
FORWARD VOLTAGE (TYP.)	2.2	2.2	2.1	Vf
FORWARD VOLTAGE (MAX.)	2.6	2.6	2.8	Vf
REVERSE VOLTAGE	5.0	5.0	5.0	Vr
AXIAL INTENSITY (TYP)	6	6	6	mcd
VIEWING ANGLE	70	70	70	2x theta
LED POSITION:	1	2	3	
LENS FINISH:	DIFFUSED SAME AS EMITTED COLOR			

LIMITS OF SAFE OPERATION AT 25°C			
PARAMETER	COLORS	MAX	UNITS
PEAK FORWARD CURRENT*		150	mA
STEADY CURRENT	(G/Y)	25/30	mA
POWER DISSIPATION		105	mW
DERATE FROM 25°C		-1.6	mW/°C
OPERATING TEMP.		-40 TO +85	°C
STORAGE TEMP.		-40 TO +85	°C
SOLDERING TEMP.		+260	°C
2.0mm FROM BODY		3	SEC.

* t<10μS

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN.= +DECIMAL PRECISION MAX.= +0.00 -DECIMAL PRECISION

UNCONTROLLED DOCUMENT

T-1.8mm LED RIGHT ANGLE THREE HIGH, FAULT INDICATOR, POS. 1,2: GREEN, POS.3: YELLOW, EMITTED COLOR DIFFUSED.

THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL
KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.