


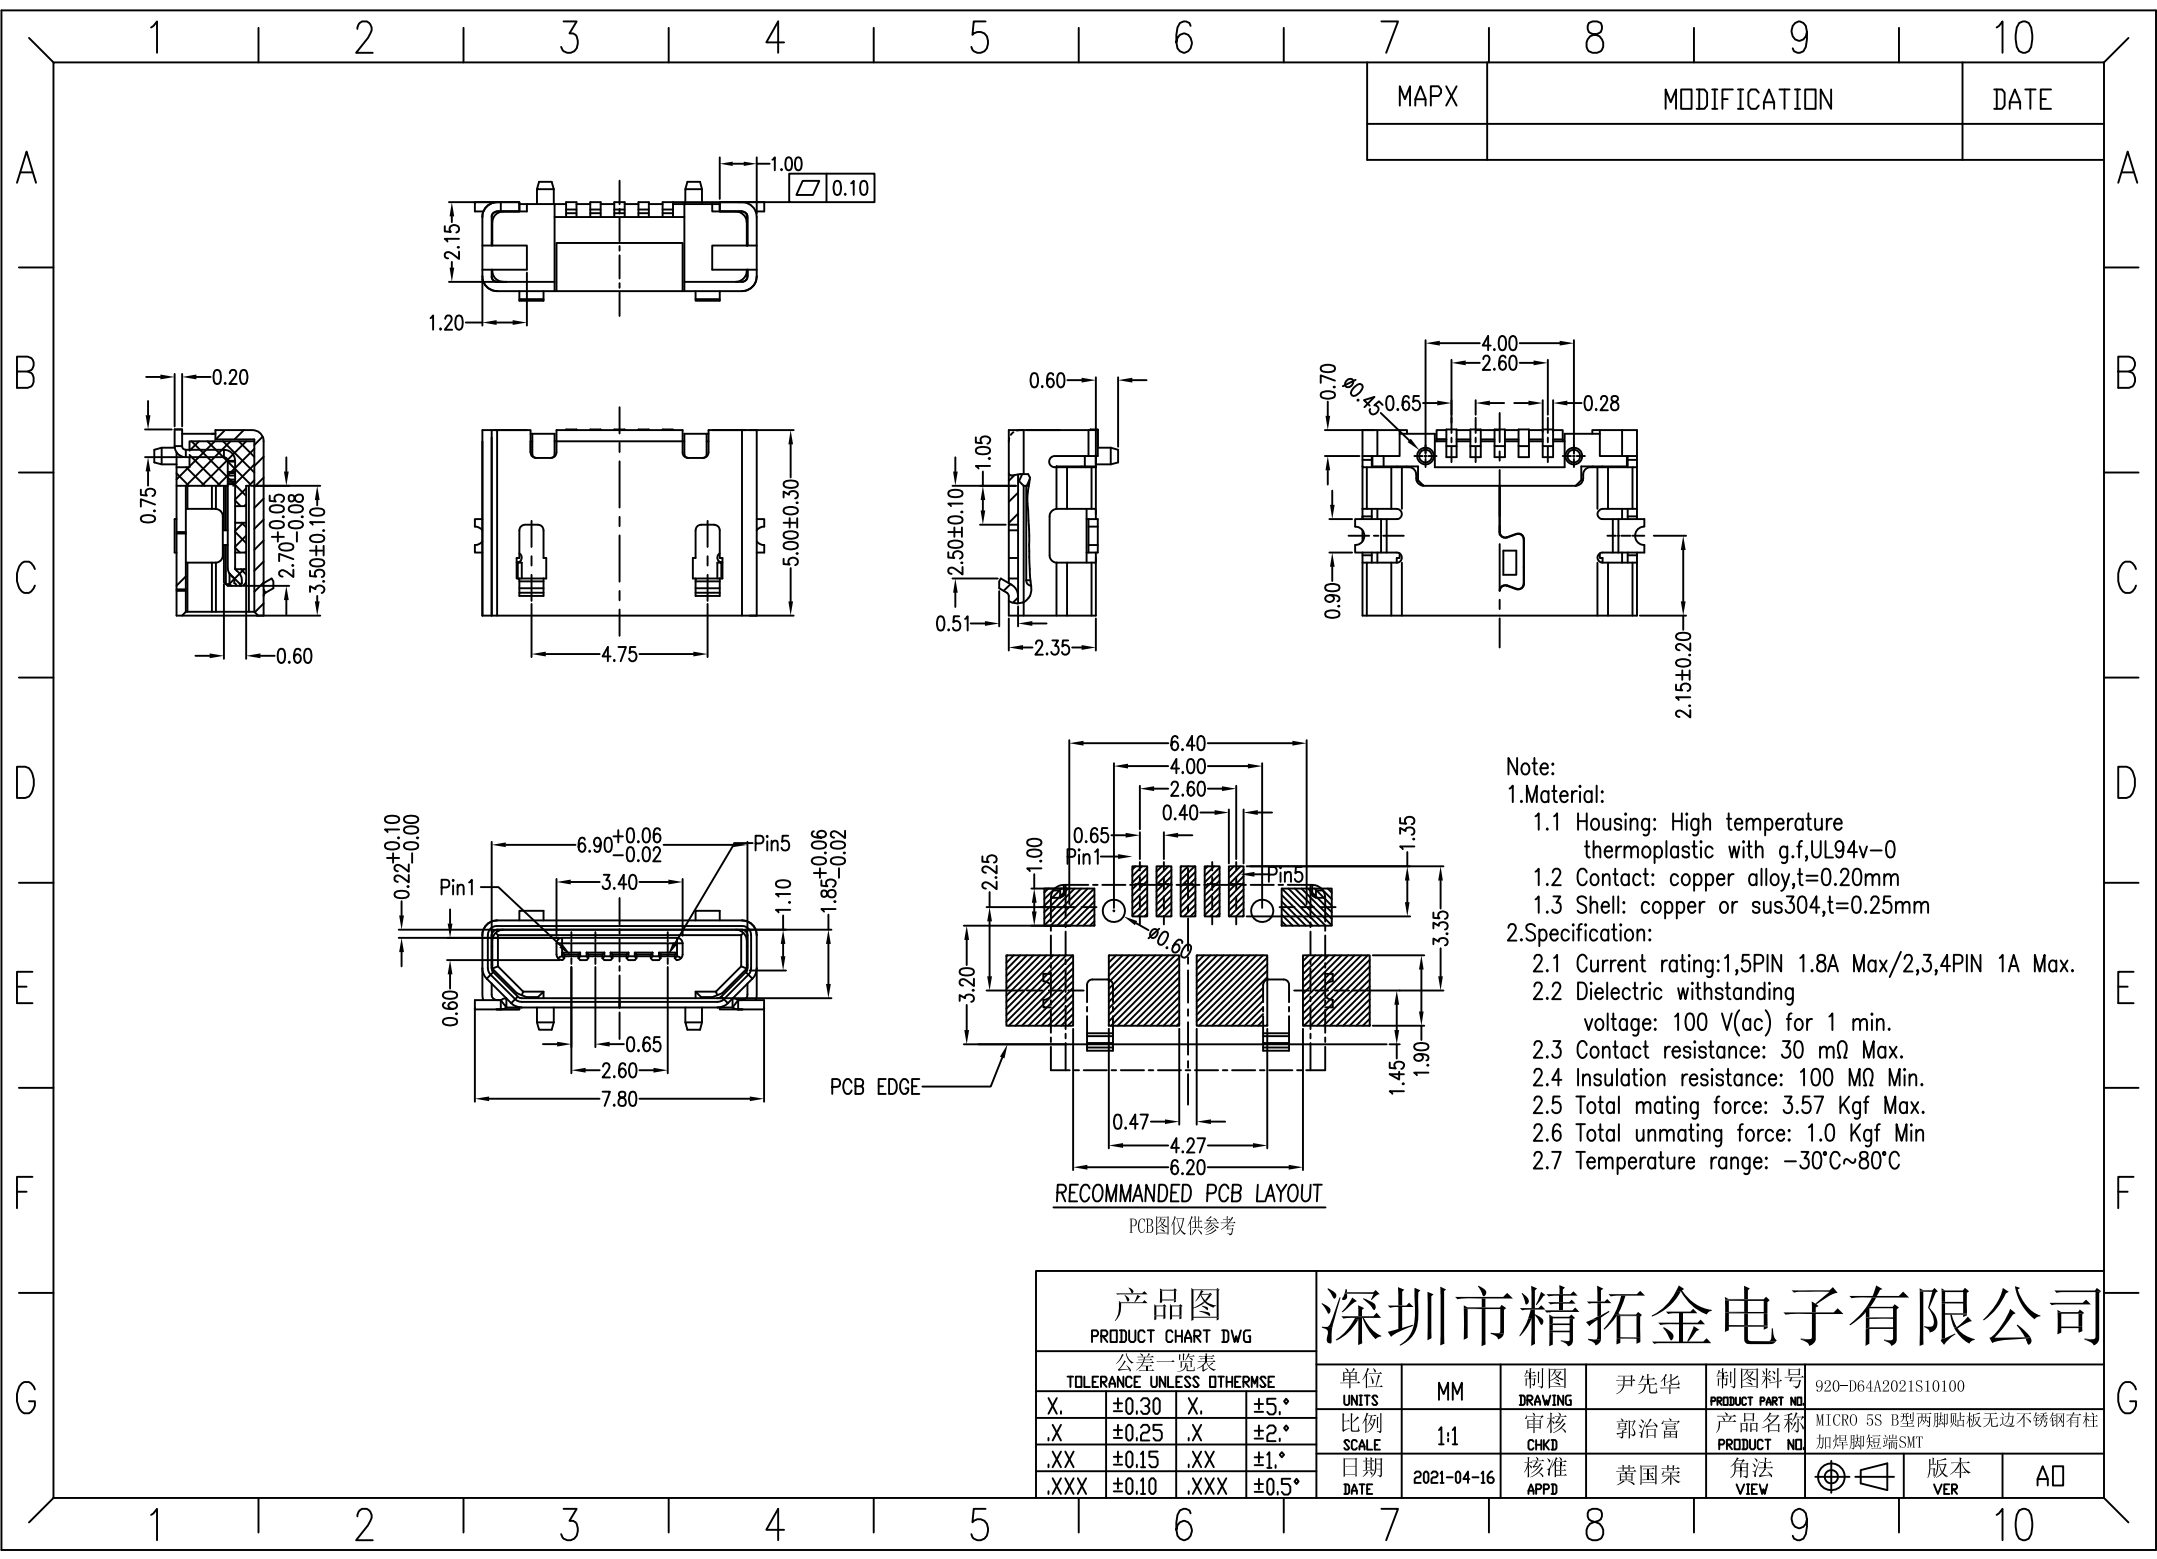

Note:
1.Material:
1.1 Housing: High temperature thermoplastic with g.f,UL94v-0
1.2 Contact: copper alloy,t=0.20mm
1.3 Shell: copper or sus304,t=0.25mm
2.Specification:
2.1 Current rating:1,5PIN 1.8A Max/2,3,4PIN 1A Max.
2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.
2.3 Contact resistance: 30 mΩ Max.
2.4 Insulation resistance: 100 MΩ Min.
2.5 Total mating force: 3.57 Kgf Max.
2.6 Total unmating force: 1.0 Kgf Min
2.7 Temperature range: -30°C~80°C

产品图		深圳市精拓金电子有限公司							
PRODUCT CHART DWG									
公差一览表									
TOLERANCE UNLESS OTHERWISE									
X.	±0.30	X.	±5.°	单位	MM	制图	尹先华	制图料号	920-D64A2021S10100
.X	±0.25	.X	±2.°	UNITS		DRAWING		PRODUCT PART NO.	
.XX	±0.15	.XX	±1.°	比例	1:1	审核	郭治富	产品名称	MICRO 5S B型两脚贴板无边不锈钢有柱
.XXX	±0.10	.XXX	±0.5°	SCALE		CHKD		PRODUCT NO.	加焊脚短端SMT
		日期	2021-04-16	核准	黄国荣	角法		版本	AD
		DATE		APPD		VIEW		VER	