



REV.	ECN NO.	DESCRIPTION	DRAW	CHECK	APPD.	DATE
A0	ECN1212260002	新发行	zhangss	—	—	12-12-26

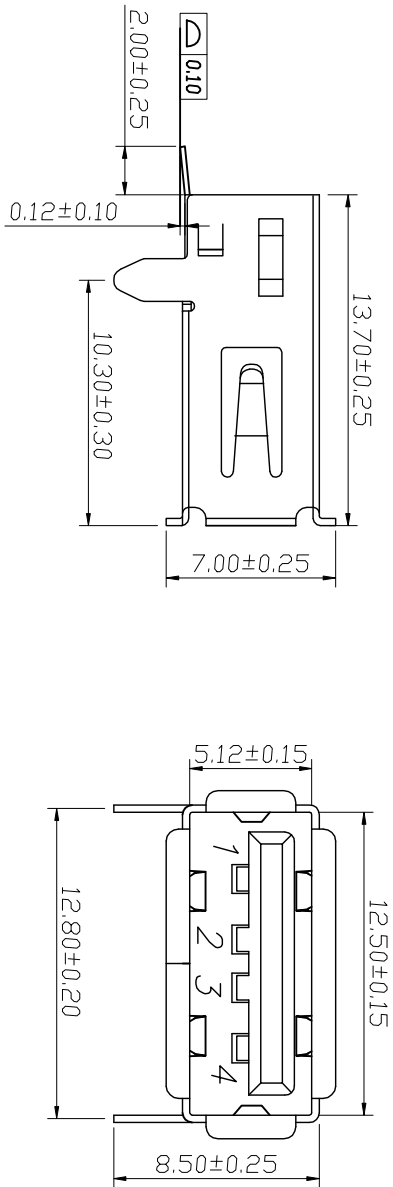

SPECIFICATIONS:
Contact current Rating:
1.5 Amperes for pin1&pin4.
Dielectric Withstanding Voltage:AC 500V(RMS)
Insulation resistance:1000Megohms Minimum.
Contact Resistance:
30mΩ Max for pin1&pin4

Mechanical Characteristics:
Mating Force:35 Newtons.Maximum
Umating Force:10 Newtons.Minimum.

MATERIAL:
Housing: PBT+30%GF 94V-0
Contact: copper alloy(T=0.25mm)
Shell: SPCC
operating Temperature:-55°to+85°

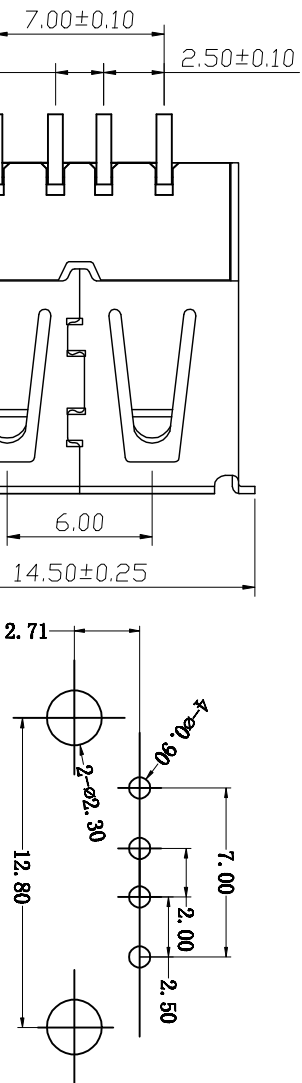

PCB Layout

ITEM	PART NAME	Material	Q'TY	REMARK
1	Shell	SPCC	1	T=0.3
2	4 PIN Contact	COPPER ALLOY	4	T=0.25 Plating Gld/Tin
3	Housing	PBT	1	WHITE UL94V-0

		深圳市万骏达电子有限公司		图号 (DWG NO)		单位 (UNIT): MM
		http://www.wanjunda.com		本 (REV)		比例 (SCALE) 1:1
品名 (ITEM NO)	USB 2.0 AF SMT 无盖有边 (一字型)	日期 (DATE)		设计 (DESIGN)		未注公差 TOLERANCE UNSPECIFIED X.X ±0.30 X.XX ±0.15 X.XXX ±0.10 X°.X° ±5° X.X° ±2°
料号 (PART NO)	USB2.0-AF-WTI-ZB-5.7H	审核 (CHECKED)		核准 (APPROVED)		
模号 (MODEL NO)						