

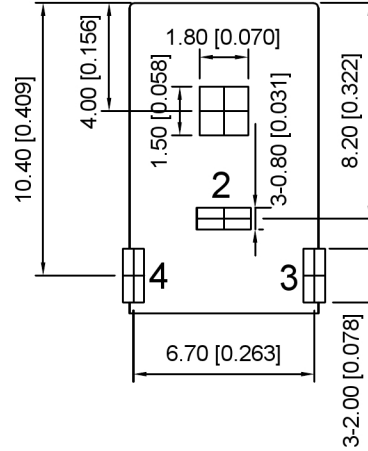




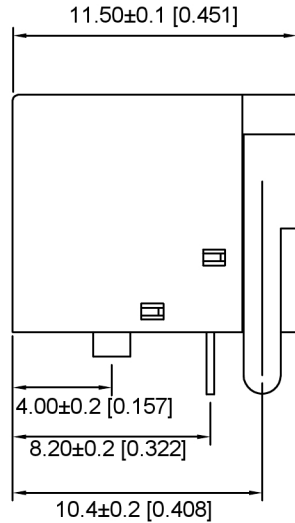


P.C.B LATOUT TOP VIEW

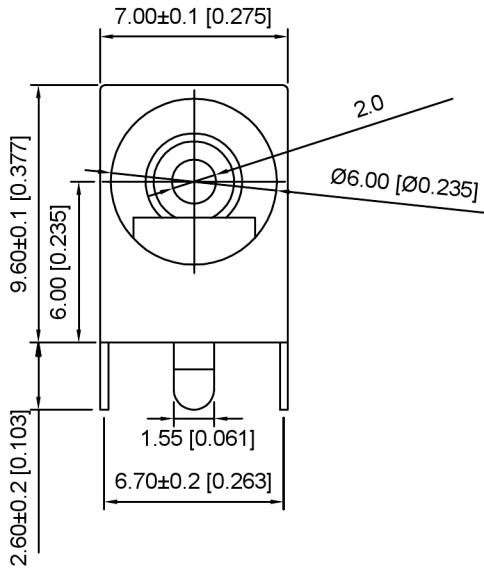

### Specifications:

规格:

- Voltage rating:**12VAC/DC  
额定电压: 12V AC/DC
- Current rating:**3A AC/DC  
额定电流: 3A AC/DC
- Withstanding voltage:**500V AC/minute  
耐受电压: ≥500V AC/分钟
- Temperature range:** -30 °C-+70 °C  
温度范围: -30 °C-+70 °C
- Insulation resistance:**100MΩMIN  
绝缘电阻: ≥100MΩ
- Contact resistance:**30mΩMax  
接触电阻: ≥30mΩ
- Life:**5000 cycles  
寿命: 5000次
- Insertion and extrsction force :** 3-20N  
插拔力: 3-20N

|            |                                                                                     |
|------------|-------------------------------------------------------------------------------------|
| SCHEMATIC  |  |
| Model      | DC-0360                                                                             |
| Center Pin | Ø1.65 mm                                                                            |
| Center Pin | Ø2.0 mm                                                                             |
| Center Pin | Ø2.5 mm                                                                             |

|      |              |        |          |        |         |
|------|--------------|--------|----------|--------|---------|
| 5    | Center pin   | 1      | Brass    | -      | Tin     |
| 4    | plain film   | 1      | Brass    | T=0.30 | Silver  |
| 3    | illustration | 1      | Brass    | T=0.30 | Silver  |
| 2    | Contact      | 1      | Brass    | T=0.30 | Silver  |
| 1    | Base         | 1      | PBT      | Black  | -       |
| ITEN | Name         | Number | Material | Color  | PLATING |

广东星坤科技股份有限公司

|      |             |
|------|-------------|
| Δx   | 日期          |
| Δx   | 日期          |
| Δx   | 日期          |
| MARK | DESCRIPTION |

文件工程章

|  |  |  |  |  |                                               |      |
|--|--|--|--|--|-----------------------------------------------|------|
|  |  |  |  |  | ANGLAR                                        | ±5°  |
|  |  |  |  |  | L ≤ 4                                         | ±0.2 |
|  |  |  |  |  | 4 < L ≤ 16                                    | ±0.3 |
|  |  |  |  |  | 16 < L ≤ 63                                   | ±0.4 |
|  |  |  |  |  | L > 63                                        | ±0.5 |
|  |  |  |  |  | UNSPECIFIED TOLERANCES                        |      |
|  |  |  |  |  | REVISIONS                                     |      |
|  |  |  |  |  | www.helloxkb.com www.helloxkb.cn www.xk-dg.cn |      |

XKB

XKB INDUSTRIAL PRECISION CO.,LIMITED

|                       |  |                                                                                             |                              |       |         |
|-----------------------|--|---------------------------------------------------------------------------------------------|------------------------------|-------|---------|
| DSND                  |  | SCALE: N/A                                                                                  | MODEL TYPE:<br>DC POWER JACK |       |         |
| DWN                   |  | VIEW:  | PART NO.:<br>DC-0360-2.5     |       |         |
| CHKD                  |  | UNIT: mm/in                                                                                 | DWG NO.:<br>X-DC-0360-2.5    |       |         |
| APPD                  |  | SIZE: A4                                                                                    |                              |       |         |
| PRECISION CO.,LIMITED |  |                                                                                             | WEIGHT                       | SHEET | REVISIC |
|                       |  |                                                                                             |                              | 1/1   | A0      |