


Silicon Dual Power Rectifier

ST3020 — ST30100

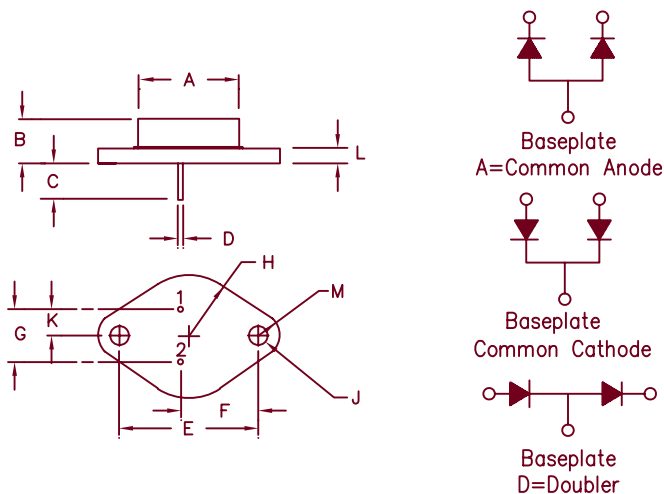

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	—	.875	—	22.23	Dia.
B	.250	.450	6.35	11.43	
C	.312	—	7.92	—	
D	.038	.043	.97	1.09	Dia.
E	1.177	1.197	29.90	30.40	
F	.655	.675	16.64	17.15	
G	.420	.440	10.67	11.18	
H	—	.525	—	13.34	Rad.
J	.151	.161	3.84	4.09	Dia.
K	.205	.225	5.21	5.72	
L	—	.135	—	3.43	
M	—	.188	—	4.78	Rad.

TO-204AA (TO-3)

Microsemi
Catalog Number

ST3010*
ST3020*
ST3040*
ST3060*
ST3080*
ST30100*

Peak
Reverse Voltage

100V
200V
400V
600V
800V
1000V

*Add D, C, or A

- Glass Passivated Die
- Glass to metal seal construction
- VRRM 200 to 1000V
- 250A Surge Rating
- Available as Common Anode, Common Cathode, or Doubler

Electrical Characteristics

Average forward current per leg (standard)
Average forward current per leg (reverse)
Maximum surge current
Max $I^2 t$ for fusing
Max peak forward voltage
Max peak reverse current
Max peak reverse current
Max Recommended Operating Frequency

$I_F(AV)$ 15 Amps
 $I_F(AV)$ 15 Amps
 I_{FSM} 250 Amps
 $I^2 t$ 260 A²s
V_{FM} 1.2 Volts
 I_{RM} 10 μ A
 I_{RM} 1.0 mA
10kHz

$T_C = 125^\circ\text{C}$, half sine wave, $R_{\theta JC} = 1.4^\circ\text{C/W}$
 $T_C = 82^\circ\text{C}$, half sine wave, $R_{\theta JC} = 2.2^\circ\text{C/W}$
8.3ms, half sine, $T_J = 200^\circ\text{C}$

$I_{FM} = 15\text{A}$; $T_J = 25^\circ\text{C}$
 V_{RRM} , $T_J = 25^\circ\text{C}$
 V_{RRM} , $T_J = 150^\circ\text{C}$

*Pulse test: Pulse width 300 μ sec. Duty cycle 2%

Thermal and Mechanical Characteristics

Storage temperature range
Operating junction temp range
Maximum thermal resistance (standard polarity)
Maximum thermal resistance (reverse polarity)
Typical thermal resistance (greased)
Weight

T_{STG}
 T_J
 $R_{\theta JC}$
 $R_{\theta JC}$
 $R_{\theta CS}$

-65°C to 200°C
 -65°C to 200°C
1.4 $^\circ\text{C/W}$ Junction to Case
2.2 $^\circ\text{C/W}$ Junction to Case
0.5 $^\circ\text{C/W}$ Case to sink
1.0 ounces (28 grams) typical



6 Lake Street
Lawrence, MA 01841
PH: (978) 620-2600
FAX: (978) 689-0803
www.microsemi.com

05-02-07 Rev. 2

ST3020 — ST30100

Figure 1
Typical Forward Characteristics — Per Leg

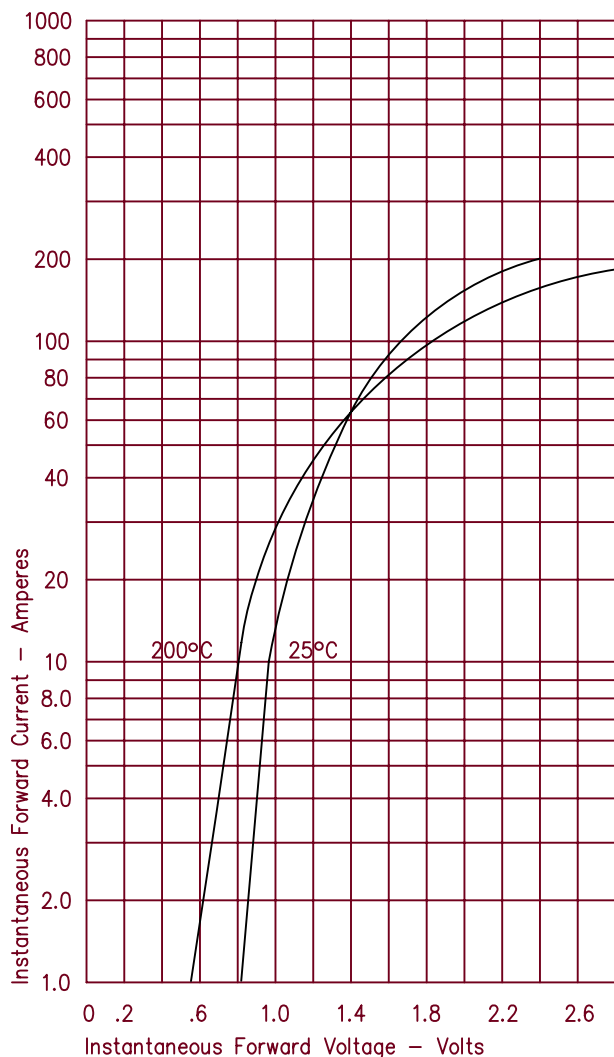


Figure 2
Typical Reverse Characteristics — Per Leg

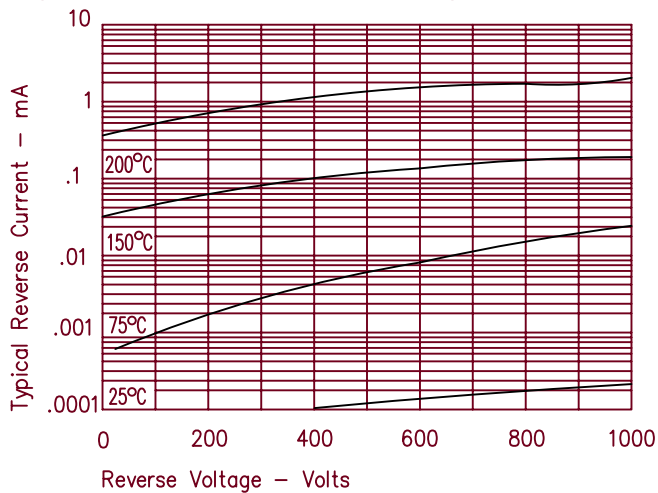


Figure 3
Forward Current Derating — Per Leg — Standard Polarity

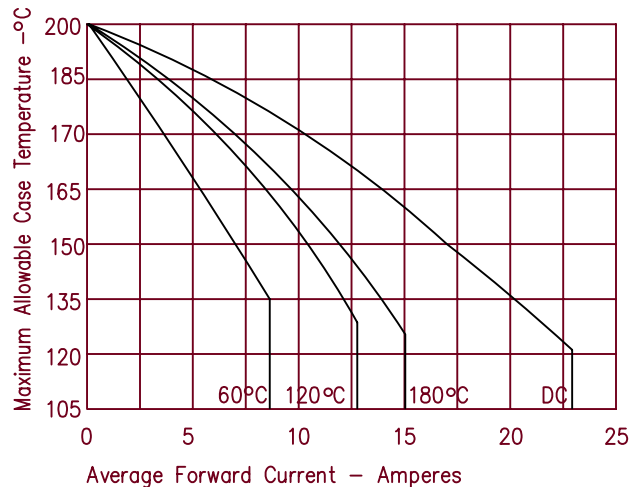


Figure 4
Maximum Forward Power Dissipation — Per Leg — Standard Polarity

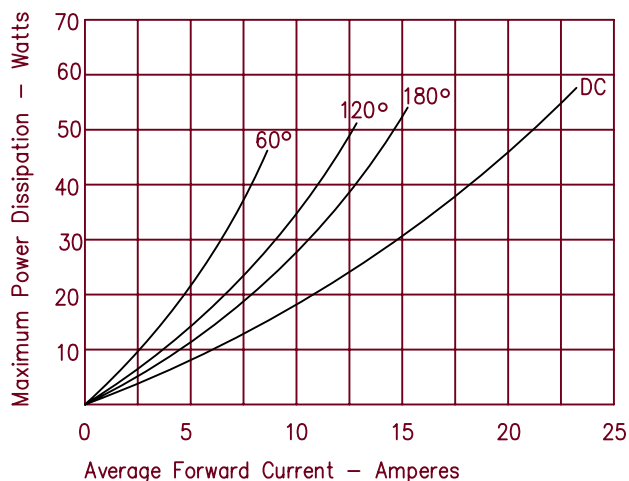


Figure 5
Forward Current Derating — Per Leg — Reverse Polarity

