



TE Internal #: 1734300-2


C-Clip PCB Spring Contact, Uncompressed Height 3 mm [.118 in],

Length 4.5 mm [.177 in], Width 2.5 mm [.098 in], 1.9 mm [.075 in]

Working Range (Low)

[View on TE.com >](#)

Connectors > Contacts > PCB Spring Contacts

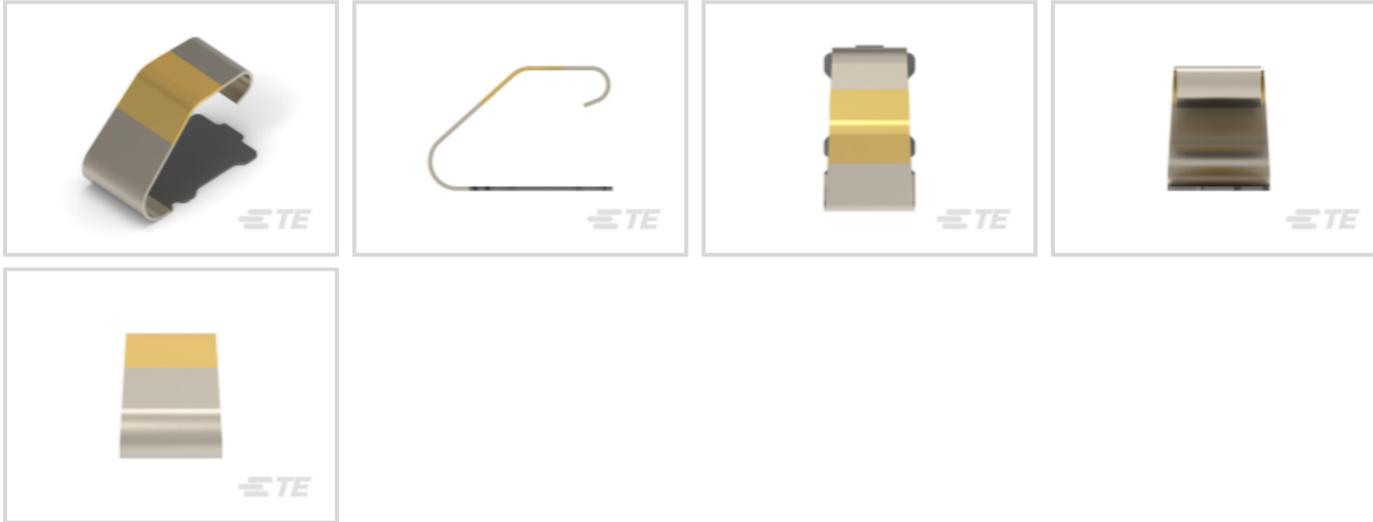

Spring Finger Type: **C-Clip**

Scalable: **No**

Side Protected: **No**

Uncompressed Height: **3 mm [.118 in]**

Product Length: **4.5 mm [.177 in]**

### Features

#### Product Type Features

Connector System	Board-to-Board
Connector & Contact Terminates To	Printed Circuit Board
Spring Finger Type	C-Clip
Scalable	No

#### Configuration Features

Number of Positions	1
Side Protected	No

#### Contact Features

Contact Underplating Material	Nickel
PCB Contact Termination Area Plating Material	Gold
Contact Base Material	Copper Alloy
Contact Working Range (Low)	1.9 mm [.075 in]
Contact Working Range (High)	2.8 mm [.11 in]
Point of Contact Area Plating Material	Gold



Contact Current Rating (Max)	1.5 A
------------------------------	-------

### Dimensions

Uncompressed Height	3 mm [.118 in]
Product Length	4.5 mm [.177 in]
Product Width	2.5 mm [.098 in]

### Usage Conditions

Operating Temperature Range	-40 – 85 °C [-40 – 185 °F]
-----------------------------	----------------------------

### Operation/Application

Circuit Application	Signal
---------------------	--------

### Packaging Features

Packaging Quantity	2500
Packaging Method	Tape & Reel

### Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Reflow solder capable to 260°C

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

## Compatible Parts



## Customers Also Bought



## Documents

### Product Drawings

#### SHIELD FINGER 3025-Z1-T

English

### CAD Files

#### 3D PDF

3D

#### Customer View Model

[ENG\\_CVM\\_CVM\\_1734300-2\\_B1.2d\\_dxf.zip](#)

English

#### Customer View Model

[ENG\\_CVM\\_CVM\\_1734300-2\\_B1.3d\\_igs.zip](#)

English

#### Customer View Model

1734300-2

C-Clip PCB Spring Contact, Uncompressed Height 3 mm [.118 in], Length 4.5 mm [.177 in], Width 2.5 mm [.098 in], 1.9 mm [.075 in] Working Range (Low)



[ENG\\_CVM\\_CVM\\_1734300-2\\_B1.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

### Product Specifications

[SHIELD FINGER](#)

English

[Product Specification](#)

English