

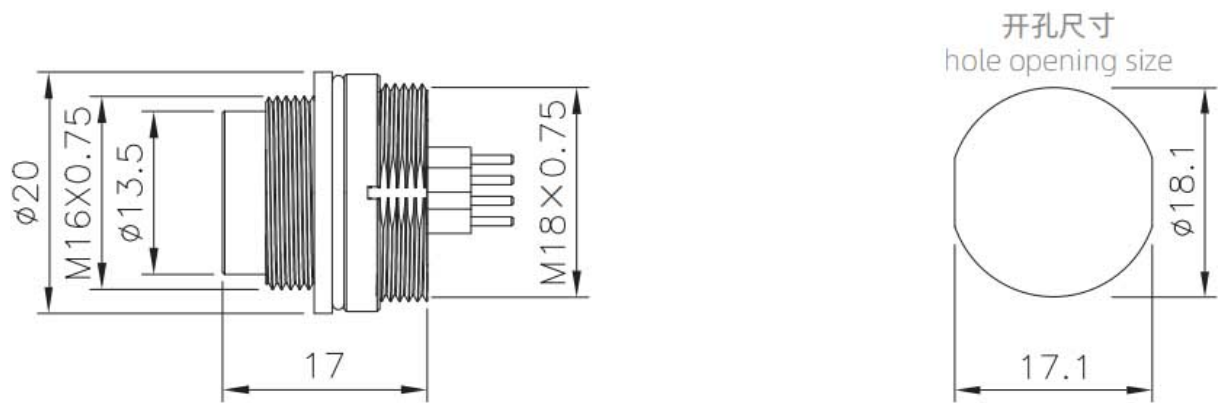


- 欧标连接器 M16系列 ,
- 结构类型：板前安装插座 ,
- 插针类型：针型 ,
- 芯数：2,3,4,5,6,7,8,12,14,16,19,24pin ,
- 连接方式：焊板 ,
- 接地：否 ,
- 认证：CE,RoHS,UL ,

机械参数

壳体材料：	黄铜/锌合金度镍/黄铜镀镍
胶芯材料：	PA66
密封材料：	环氧树脂/橡胶
插针材料：	黄铜/磷铜镀金
成型材料：	TPU/PVC
接线范围：	PG7:4~6mm; PG9:6~8mm
接触阻抗：	≤5 mΩ
插拔次数：	≥500 次
适用温度：	-25℃ ~ +80℃
防护等级：	IP65/IP67
执行标准：	IEC 61076-2-106-2012



尺寸图



插板式芯位图

芯数 Pins	2P	3P	4P	5P	6P	7P	8P	12P
针型 Male								
	14P	16P	19P	24P	5A	7A	14A	
芯数 Pins	2P	3P	4P	5P	6P	7P	8P	12P
孔型 Female								
	14P	16P	19P	24P	5A	7A	14A	

电气参数

芯数 Pins	针型 Male		额定电流 Rated current	额定电压 Rated voltage		导体规格 Conductor size		孔型 Female	
	常规编码 General coding	A型 A-code		A/C	D/C	AWG	mm ²	常规编码 General coding	A型 A-code
2			7A	250V	32V	20	0.75		
3			7A	250V	32V	20	0.75		
4			6A	250V	32V	20	0.75		
5			6A	250V	32V	20	0.75		
6			5A	250V	32V	20	0.75		
7			5A	125V	32V	20	0.75		
8			5A	60V	32V	20	0.75		
12			3A	60V	32V	24	0.25		
14			3A	60V	32V	24	0.25		
16			3A	60V	32V	24	0.25		
19			3A	60V	32V	24	0.25		
24			1A	60V	32V	26	0.14		

订购产品

产品名称	产品型号	芯数	3D下载	2D下载
------	------	----	------	------

M16板前安装针型插座-PCB式-2芯	M16-P2-GPB M18	2	↓	↓
M16板前安装针型插座-PCB式-3芯	M16-P3-GPB M18	3	↓	↓
M16板前安装针型插座-PCB式-4芯	M16-P4-GPB M18	4	↓	↓
M16板前安装针型插座-PCB式-5芯	M16-P5-GPB M18	5	↓	↓
M16板前安装针型插座-PCB式-6芯	M16-P6-GPB M18	6	↓	↓
M16板前安装针型插座-PCB式-7芯	M16-P7-GPB M18	7	↓	↓
M16板前安装针型插座-PCB式-8芯	M16-P8-GPB M18	8	↓	↓
M16板前安装针型插座-PCB式-12芯	M16-P12-GPB M18	12	↓	↓
M16板前安装针型插座-PCB式-14芯	M16-P14-GPB M18	14	↓	↓
M16板前安装针型插座-PCB式-16芯	M16-P16-GPB M18	16	↓	↓
M16板前安装针型插座-PCB式-19芯	M16-P19-GPB M18	19	↓	↓
M16板前安装针型插座-PCB式-24芯	M16-P24-GPB M18	24	↓	↓
M16板前安装针型插座-PCB式-5芯A口	M16-P5A-GPB M18	5A	↓	↓
M16板前安装针型插座-PCB式-7芯A口	M16-P7A-GPB M18	7A	↓	↓
M16板前安装针型插座-PCB式-14芯A口	M16-P14A-GPB M18	14A	↓	↓

资料下载

产品目录	CAZN正成-欧标产品选型手册
认证/证书	EMC认证
RoHS报告	查看
防水测试报告	查看