
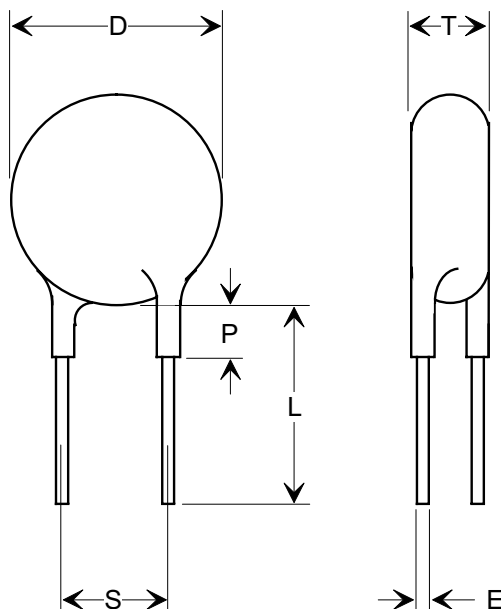



MARKETING SALES DRAWING
DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []

Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.



SPECIFICATIONS

TUSONIX PART NO.		841-040-X5U0-103 M
D (Diameter):		.660 ± .030 [16.76 ±0.76]
T (Thickness):		.120 ± .040 [3.05 ±1.02]
S (Lead Wire Spacing):		.375 ±.060 [9.52 ±1.52]
L (Lead Wire Length):		1.25 [31.75] MIN.
E (Lead Wire Diameter):		.032 [0.81] (20 AWG.)
P (Coating on Leads Max.):		.125 [3.17]
Capacitance Value:		10,000 pF
Capacitance Tolerance:		± 20%
Temperature Coefficient:		X5U
Voltage:	Working:	500 VDC
	Test:	1500 VDC
	Life:	1000 VDC
Marking: TMK, MIL PART NO., DATE CODE.		

NOTE:
TESTED TO MIL-C-11015/12E FOR
QUALITY CONFORMANCE INSPECTION.
STYLE CK63.

REVISION RECORD Original Release C.O. 19991004-4-02 ADDED METRIC, PROJECTION & CIRCUIT. S.M. 01-08-02 20020103-8-01		--TOLERANCES-- Unless Otherwise Specified	Title DISC	
		DECIMAL ±	Drawn S.M. 10-05-99	
		ANGLES ±	Approved E.F. 10-05-99	
		TUSONIX TUCSON, ARIZONA	A	841-040-X5U0-103M

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Tusonix / CTS:](#)

[CK63AW103M](#) [0838-040-X5U0-471M](#) [CK60AW152M](#) [0838-040-X5U0-102M](#) [0838-040-X7R0-470K](#) [0831-040-X5R0-471K](#) [0838-040-X5R0-221K](#)