




M28876 (/6, /7, /8, /9)
180-040 (-06, -16, -26, -36)
MIL-PRF-28876 Plug Connector
 for use with MIL-PRF-29504/14 and /15 Termini



MIL-PRF-28876 QPL plug connector




Plug without backshell

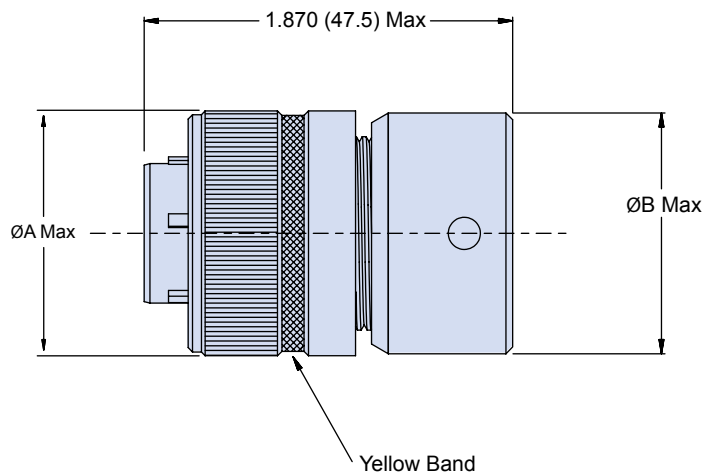


M28876/6 • 180-040 (-06)
PLUG WITHOUT BACKSHELL



Plug with straight backshell

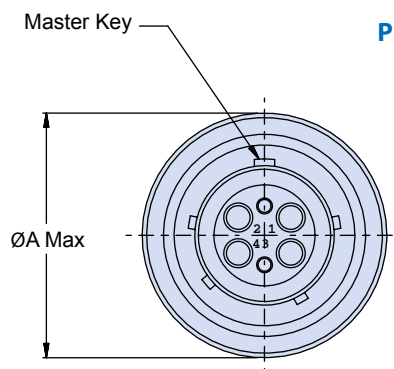

Shell Size 13 Insert
 Arrangement Shown

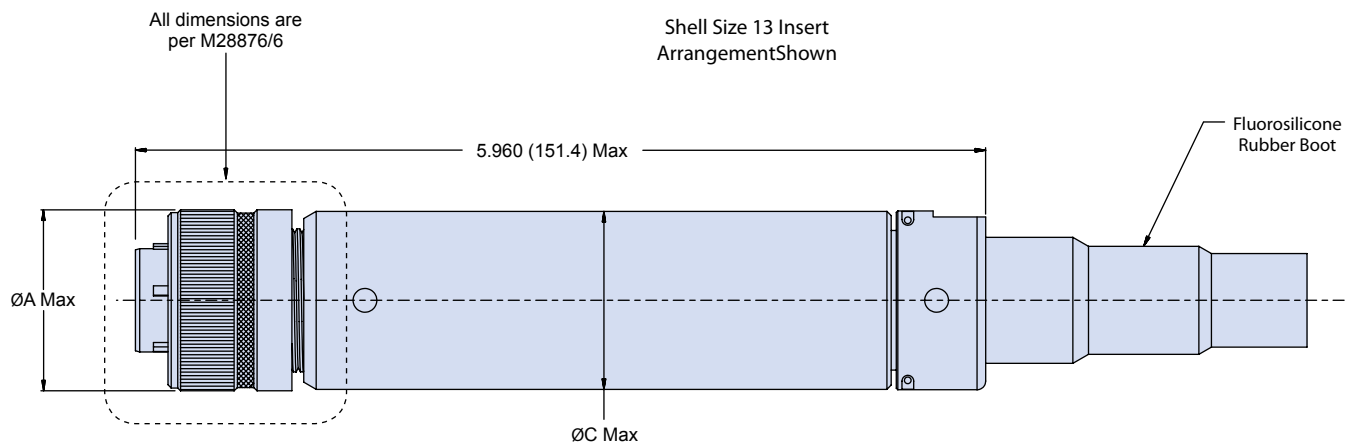


M28876/7 • 180-040 (-16) PLUG WITH STRAIGHT BACKSHELL

M28876 (/6, /7, /8, /9)
180-040 (-06, -16, -26, -36)
MIL-PRF-28876 Plug Connector
for use with MIL-PRF-29504/14 and /15 Termini




Table I							
Shell Size	ØA Max	ØB Max	ØC Max	D Max	E Max	F Max	G Max.
11	1.028 (26.1)	0.960 (24.4)	0.960 (24.4)	6.090 (154.7)	3.540 (89.9)	4.190 (106.4)	4.250 (108.0)
13	1.141 (29.0)	1.085 (27.6)	1.085 (27.6)	6.160 (156.5)	3.580 (90.9)	4.190 (106.4)	4.250 (108.0)
15	1.263 (32.1)	1.255 (31.9)	1.255 (31.9)	6.440 (163.6)	3.850 (97.8)	4.440 (112.8)	4.500 (114.3)
23	1.705 (43.3)	1.695 (43.1)	1.763 (44.8)	7.350 (186.7)	5.000 (127.0)	4.850 (123.2)	5.000 (127.0)

All dimensions are
per M28876/6

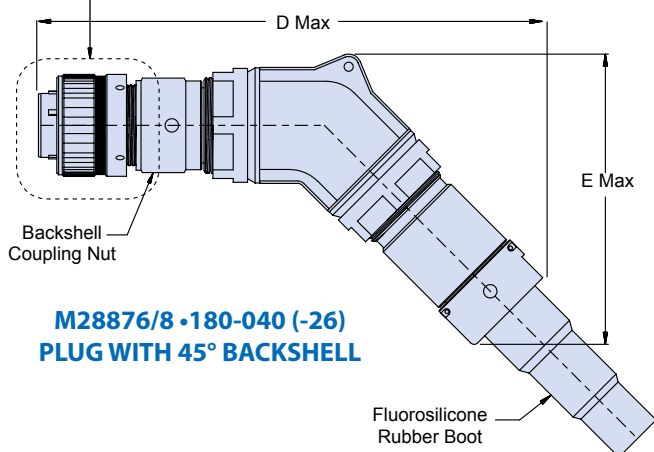

M28876/8 • 180-040 (-26)
PLUG WITH 45° BACKSHELL

All dimensions are
per M28876/6

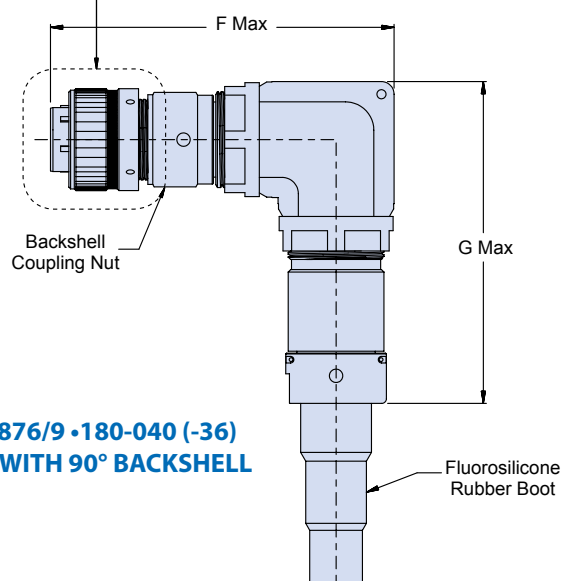

M28876/9 • 180-040 (-36)
PLUG WITH 90° BACKSHELL

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Glenair:

[M28876/9B12P1](#) [M28876/6C1P1N](#) [M28876/6C1P1](#) [M28876/7C21P1](#) [M28876/8B12S1](#) [M28876/8C11P1](#)
[M28876/6B1P1](#) [M28876/7B12S1](#) [M28876/7B13P1](#) [M28876/7B12P2](#) [M28876/6C2P1](#) [M28876/8B12P1](#)
[M28876/6C2P1N](#) [M28876/8C23P1](#)