

370-002

Submersible Cable Sealing Backshell

with Strain Relief

Full Radius Profile - Direct Coupling







CONNECTOR DESIGNATORS

A-B*-C-D-E-F

G-H-J-K-L-S

* Conn. Design. B See Note 3

DIRECT COUPLING

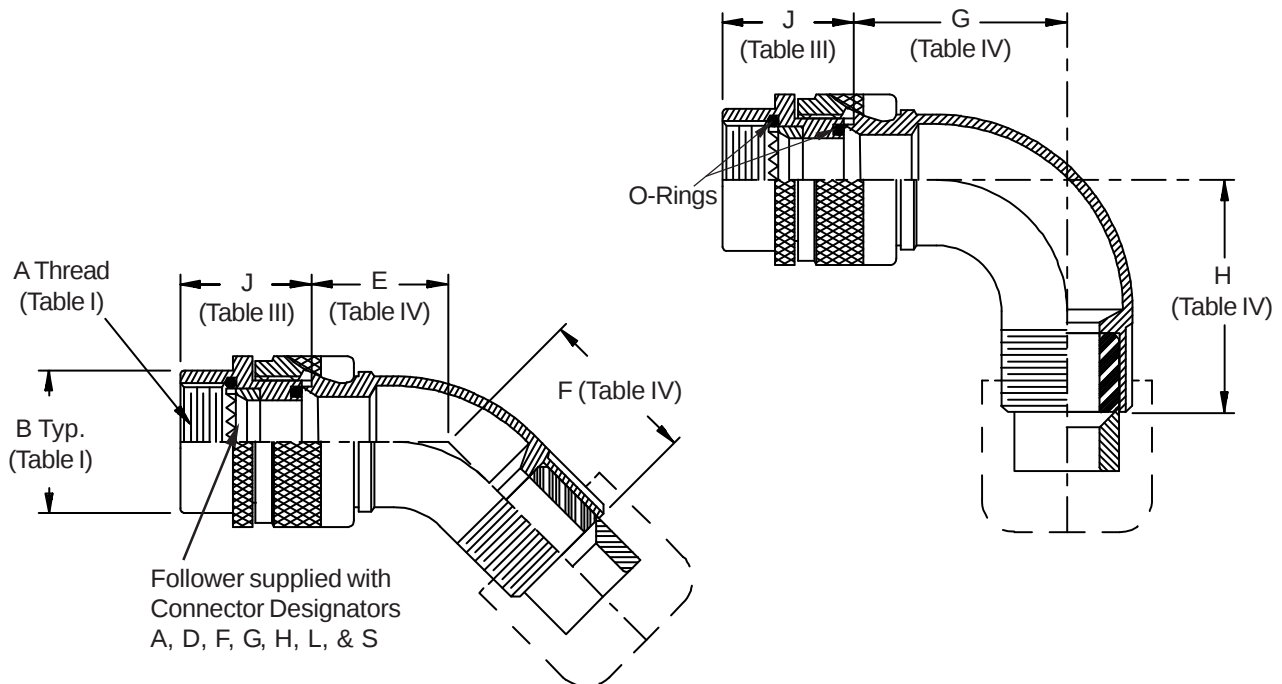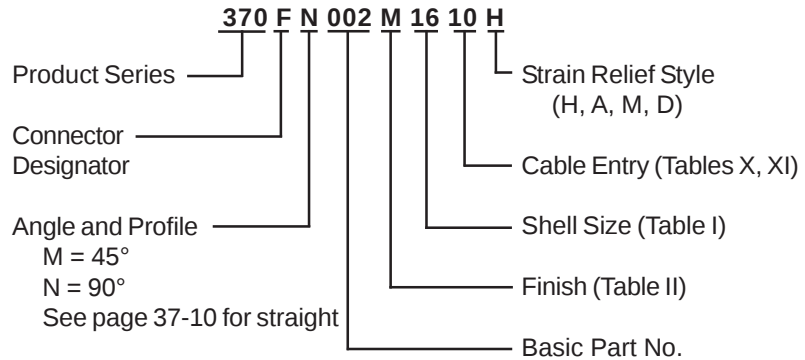

370-002
Submersible Cable Sealing Backshell
 with Strain Relief
 Full Radius Profile - Direct Coupling



37

See inside back cover fold-out or
 pages 13 and 14 for unabridged
 Tables I and II.

TABLE III: FRONT ADAPTER			
Shell Size	J Max - Conn. Designator		
	A-E-F		C
	J-H-L-S	D-B-G-K	
08/09	1.180 (30.0)	1.440 (36.6)	
10/11	1.180 (30.0)	1.440 (36.6)	
12/13	1.180 (30.0)	1.440 (36.6)	1.735 (44.1)
14/15	1.180 (30.0)	1.440 (36.6)	1.915 (48.6)
16/17	1.380 (35.0)	1.560 (39.6)	1.915 (48.6)
18/19	1.380 (35.0)	1.560 (39.6)	1.915 (48.6)
20/21	1.380 (35.0)	1.560 (39.6)	1.915 (48.6)
22/23	1.380 (35.0)	1.560 (39.6)	1.915 (48.6)
24/25	1.380 (35.0)	1.560 (39.6)	1.915 (48.6)
28/29	1.610 (40.9)	1.560 (39.6)	1.915 (48.6)
32/33	1.610 (40.9)	1.750 (44.5)	1.915 (48.6)
36	1.610 (40.9)	1.750 (44.5)	1.915 (48.6)
40	1.610 (40.9)	2.190 (55.6)	1.915 (48.6)

TABLE IV: ELBOW DIMENSIONS								
Elbow Size	E Max	F Max	G Max	H Max				
03	.817 (20.8)	1.127 (28.6)	1.125 (28.6)	1.445 (36.7)				
04	.861 (21.9)	1.181 (30.0)	1.250 (31.8)	1.570 (39.9)				
06	.911 (23.1)	1.231 (31.3)	1.375 (34.9)	1.695 (43.1)				
08	.965 (24.5)	1.285 (32.6)	1.500 (38.1)	1.820 (46.2)				
10	1.014 (25.8)	1.334 (33.9)	1.625 (41.3)	1.945 (49.4)				
12	1.064 (27.0)	1.384 (35.2)	1.750 (44.5)	2.070 (52.6)				
16	1.172 (29.8)	1.492 (37.9)	2.000 (50.8)	2.320 (58.9)				
20	1.325 (33.7)	1.645 (41.8)	2.375 (60.3)	2.695 (68.5)				
24	1.325 (33.7)	1.645 (41.8)	2.375 (60.3)	2.695 (68.5)				
28	1.428 (36.3)	1.748 (44.4)	2.625 (66.7)	2.945 (74.8)				

TABLE X: CABLE ENTRY						
Dash No.	T Max	V Max	Cable Range			
			Min		Max	
04	.780 (19.8)	.957 (24.3)	.125 (3.2)	.312 (7.9)		
06	.780 (19.8)	1.145 (29.1)	.250 (6.4)	.437 (11.1)		
08	.780 (19.8)	1.332 (33.8)	.387 (9.8)	.562 (14.3)		
10	.780 (19.8)	1.332 (33.8)	.350 (8.9)	.625 (15.9)		
12	.811 (20.6)	1.551 (39.4)	.500 (12.7)	.750 (19.1)		
16	.905 (23.0)	1.770 (45.0)	.625 (15.9)	.937 (23.8)		
20	1.092 (27.7)	2.113 (53.7)	.875 (22.2)	1.250 (31.8)		
24	1.124 (28.5)	2.363 (60.0)	1.000 (25.4)	1.375 (34.9)		
28	1.399 (35.5)	2.770 (70.4)	1.250 (31.8)	1.625 (41.3)		
32	1.399 (35.5)	3.020 (76.7)	1.437 (36.5)	1.875 (47.6)		

TABLE II: STANDARD FINISHES	
GLENAIR SYMBOL	FINISH
B	Cadmium Plate, Olive Drab
C	Anodize, Black
G	Hard Coat, Anodic
M	Electroless Nickel
NF	Cadmium Plate, Olive Drab Over Electroless Nickel

1. Metric dimensions (mm) are indicated in parentheses.
2. Cable range is defined as the accommodation range for the wire bundle or cable.

TABLE XI: CABLE ENTRY								
Dash No.	W Max	X Max	Y Max	Z Max	Cable Range			
					Min **		Max	
03*	.437 (11.1)	.760 (19.3)	.843 (21.4)	.630 (16.0)	.156 (4.0)	.250 (6.4)		
04*	.437 (11.1)	.760 (19.3)	.906 (23.0)	.755 (19.2)	.188 (4.8)	.312 (7.9)		
06*	.500 (12.7)	.760 (19.3)	1.093 (27.8)	.942 (23.9)	.281 (7.1)	.438 (11.1)		
08	.563 (14.3)	.760 (19.3)	1.187 (30.1)	1.067 (27.1)	.387 (9.8)	.562 (14.3)		
10	.563 (14.3)	.760 (19.3)	1.281 (32.5)	1.192 (30.3)	.375 (9.5)	.625 (15.9)		
12	.563 (14.3)	.760 (19.3)	1.500 (38.1)	1.380 (35.1)	.438 (11.1)	.750 (19.1)		
16	.656 (16.7)	1.073 (27.3)	1.719 (43.7)	1.535 (39.0)	.625 (15.9)	.938 (23.8)		
20	.656 (16.7)	1.323 (33.6)	2.062 (52.4)	1.848 (46.9)	.875 (22.2)	1.250 (31.8)		
24	.656 (16.7)	1.323 (33.6)	2.312 (58.7)	2.255 (57.3)	1.000 (25.4)	1.375 (34.9)		
28	1.188 (30.2)	1.572 (39.9)	2.719 (69.1)	2.505 (63.6)	1.250 (31.8)	1.625 (41.3)		
32*	1.187 (30.1)	1.572 (39.9)	2.969 (75.4)	2.755 (70.0)	1.437 (36.5)	1.875 (47.6)		
40*	1.125 (28.6)	1.572 (39.9)	3.531 (89.7)	3.255 (82.7)	1.875 (47.6)	2.375 (60.3)		

* Not available in Style M clamp.

** Not Applicable Style D

3. When using Connector Designator B refer to pages 18 and 19 for part number development.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Glenair:

[370XS002B0706H4-706](#) [370ES002C2012H6](#) [370BS002B1606D6A](#) [370DS002NF1410A4](#) [370HS002M1104H4](#)
[370BS002B1712D6A](#) [370AS002B1008H4](#) [370BS002B2016D6A](#) [370BS002B1604A4A](#) [370BS002NF1404A3A](#)
[370BS002B1612D6A](#) [370ES002M1406H6](#) [370DS002M0804A3](#) [370BS002B1506D6A](#)