

SuperNine® Backshells and accessories

667-449 Dust and moisture resistant flop-lid

MIL-DTL-38999





Part Number Development						
Sample Part Number	667-449			NF	17	T1 J -59
Product Series	Dust and moisture resistant flop-lid					
Finish	MT = Aluminum/nickel-PTFE ZR = Aluminum/zinc nickel, black M = Aluminum/electroless nickel C = Aluminum/anodize, black UC = Zinc cobalt, black NF = Aluminum/CAD plate, olive drab over electroless nickel XB = Composite, black					
Shell Size	See Dimensions Table					
Panel Thickness	See Panel Thickness Table					
Type of Mounting	J = Jam Nut Mount Receptacle W = Wall Mount Receptacle with Slotted Holes					
Gasket	-59 = Consil II -59C = Cho-Seal 1285 Omit for silicone					

Dimensions							
Shell Size	A Dim Max	B Dim	C Dim	E ±.031	F Dim Max	H Dim ±.005	J Dia Max
09	.937 (23.80)	.719 (18.26)	.360 (9.14)	1.031 (26.19)	.913 (23.19)	.089 (2.26)	.872 (22.15)
11	1.031 (26.19)	.812 (20.62)	.406 (10.31)	1.125 (28.58)	.961 (24.41)	.066 (1.68)	.988 (25.10)
13	1.126 (28.60)	.906 (23.01)	.453 (11.51)	1.375 (34.92)	1.083 (27.51)	.066 (1.68)	1.129 (28.68)
15	1.220 (30.99)	.969 (24.61)	.485 (12.32)	1.560 (39.62)	1.178 (29.92)	.045 (1.14)	1.280 (32.51)
17	1.311 (33.30)	1.062 (26.97)	.531 (13.49)	1.625 (41.28)	1.211 (30.76)	.066 (1.68)	1.441 (36.60)
19	1.437 (36.50)	1.156 (29.36)	.578 (14.68)	1.750 (44.45)	1.273 (32.33)	.066 (1.68)	1.499 (38.07)
21	1.563 (39.70)	1.250 (31.75)	.625 (15.88)	2.000 (50.80)	1.538 (39.07)	.066 (1.68)	1.630 (41.40)
23	1.689 (42.90)	1.375 (34.92)	.688 (17.48)	2.150 (54.61)	1.614 (41.00)	.089 (2.26)	1.755 (44.58)
25	1.841 (46.76)	1.500 (38.10)	.750 (19.05)	2.218 (56.34)	1.647 (41.83)	.089 (2.26)	1.880 (47.75)

Panel Thickness				
Dash No.	Panel Thickness ±.030	Shell Size	G ±.06	
			Jam Nut Style	Wall Style
T0	.000 (0.00) (See Note 2)	09-19	N/A	1.039 (26.39)
		21-25	N/A	1.094 (27.79)
T1	.062 (1.57)	09-19	1.041 (26.44)	0.977 (24.82)
		21-25	1.126 (28.60)	1.032 (26.21)
T2	.125 (3.18)	09-19	0.979 (24.87)	0.915 (23.24)
		21-25	1.064 (27.03)	0.970 (24.64)

NOTES

- When not in the closed position, the lever arm will remain open at approximately 105° from receptacle face.
- Jam nut mounting style is not available with panel thickness T0
- Optional gasket material
- Material/Finish
 - Cover, lever arm, gimbal - thermoplastic/black
 - Bracket: see panel thickness table
 - Spring/pin/rivet: 300 series SST/ passivate
 - Sleeve: Delrin
 - Gasket: silicone

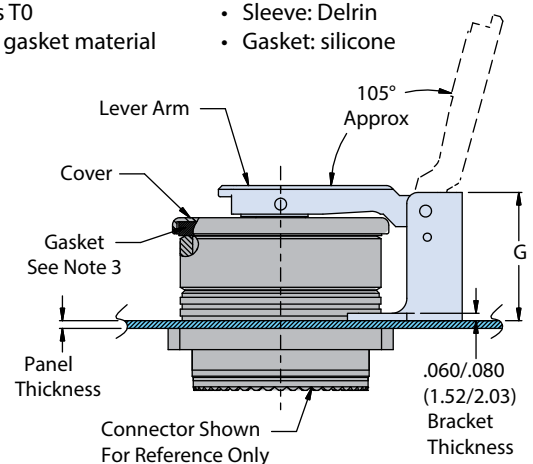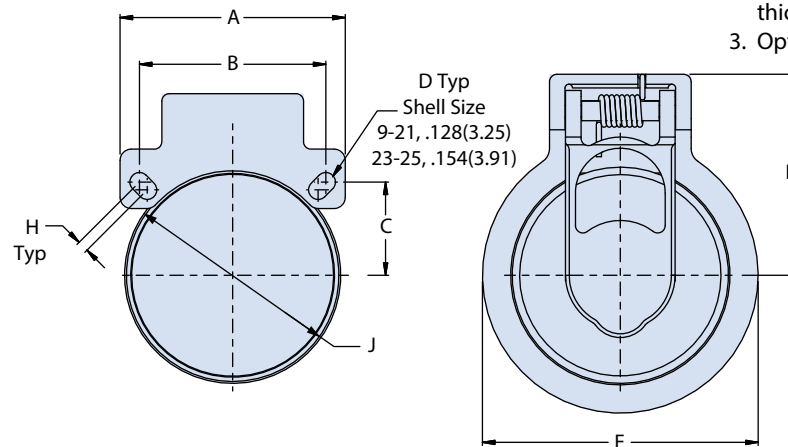

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Glenair:

[667-449M09T0W](#) [667-449M09T1J](#) [667-449M09T1W](#) [667-449M11T0W](#) [667-449M11T1J](#) [667-449M11T1W](#) [667-449NF19T0W](#) [667-449NF19T1W](#) [667-449NF15T0W](#) [667-449NF15T1J](#) [667-449NF15T1W](#) [667-449NF17T0W](#) [667-449NF17T1J](#) [667-449NF17T1W](#) [667-449NF11T0W](#) [667-449NF11T1J](#) [667-449NF11T1W](#) [667-449NF13T0W](#) [667-449NF13T1J](#) [667-449NF13T1W](#) [667-449M13T0W](#) [667-449M13T1J](#) [667-449M13T1W](#) [667-449NF09T0W](#) [667-449NF09T1J](#) [667-449NF09T1W](#)