

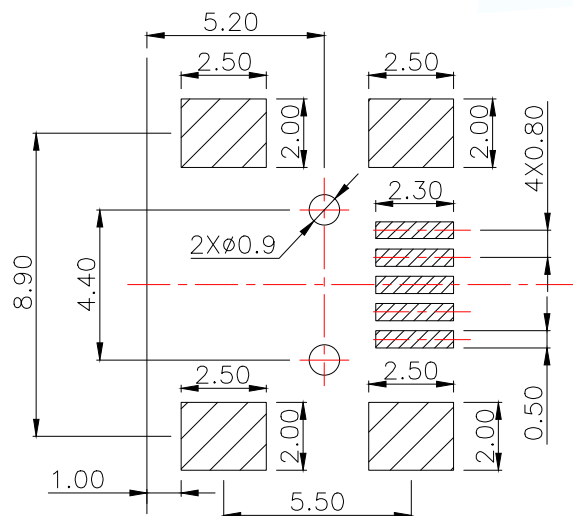
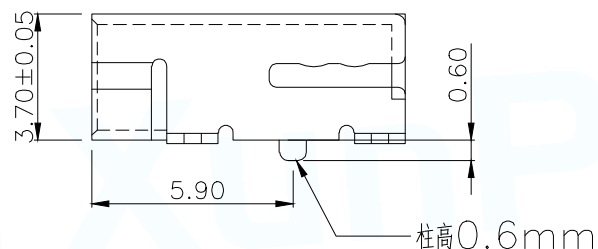
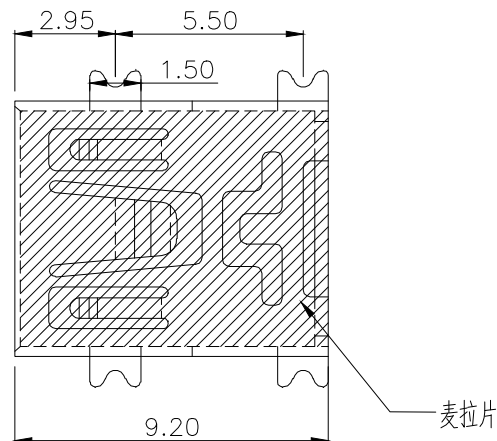


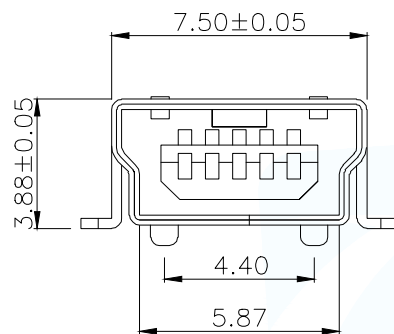

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ± 0.05

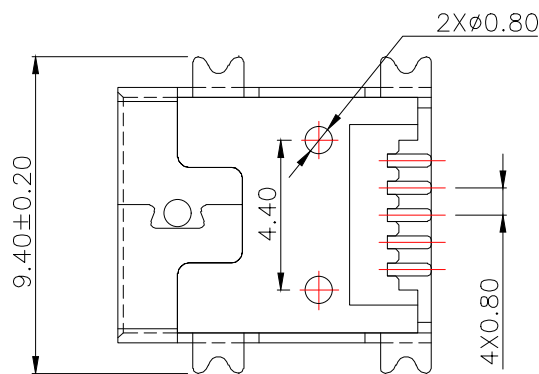

规格说明: Specifications:

电气特性: Electrical:

1. 额定电流: Current Rating
1.0A/contact terminal
2. 额定电压: Voltage Rating 30V DC
3. 接触阻抗: Contact Resistance 50 milliohms MAX
4. 耐电压: Dielectric Withstanding
Voltage: 300 V AC AT Sea Level
5. 绝缘阻抗: Insulation Resistance:
100MEGA ohms MIN

原材料: Raw material:

1. 塑胶: Plastic cement:
High Temperature Thermoplastics,
LCP Black
 2. 端子: Contact: Copper Alloy C2680/C5191
 3. 外壳: Shell: SPCC/Copper Alloy C2680
- 电镀: Electroplate:
1. 端子: Contact: Plated Gold in Mating Area;
Tin On Solder Tails
 2. 外壳: Shell:
Nickel Plating

MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co., Ltd		
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE: MINI USB 5P/F SMT B型(0.3T, 0.6#)	
			PAR	UX-144S-ACP5
DECIMALS:	ANGLES:		DWN	Lucas
.X: ± 0.30	X.: $\pm 5^\circ$		CHKD	Ethan
.XX: ± 0.20	X.X': $\pm 2^\circ$		APVD	Jacob
.XXX: ± 0.10		CUSTOMER COPY	SCALE 1:1	UNIT: MM
			SIZE: A4	SHEET: 1F1
				REV: A