
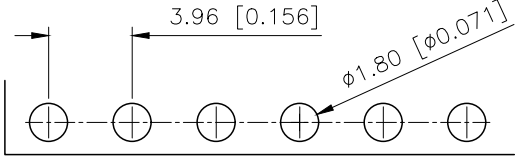


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE		
A1	N/A		图面升级整理图面	2024.08.30	阿树

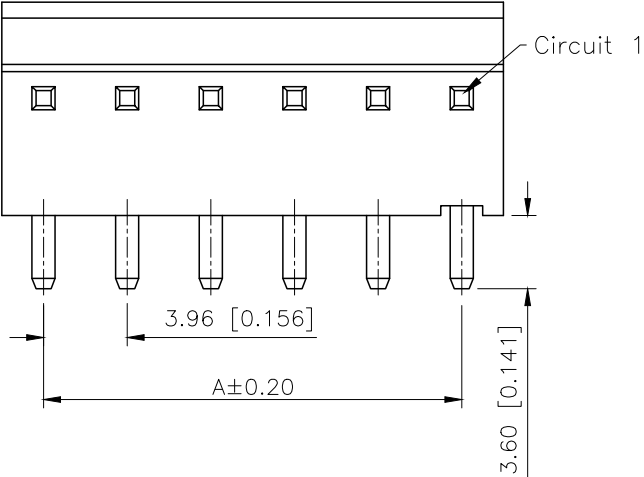



P.C.B Layout

- SPECIFICATIONS
- Voltage rating:250V AC/DC
 - Current rating:7A AC/DC
 - Withstanding Voltage:1500V AC/minute
 - Temperature range:-40°C~+125°C
 - Insulation resistance:≥1000MΩ
 - Contact resistance:≤10mΩ
 - After environmental testing:≤20mΩ

PART NO.:

X8672 W R-XX A-N2 SN
① ② ③ ④ ⑤ ⑥ ⑦

- ①Series No
②Category:W-Wafer
③Welding Board Angle:R-Stright 90°
④Row No.Pin No:XX-02~20Pin
⑤Special No:A-There are gaps
⑥Material:N2-PA66 94V-2
⑦Plating:SN-Bright Tin Plated

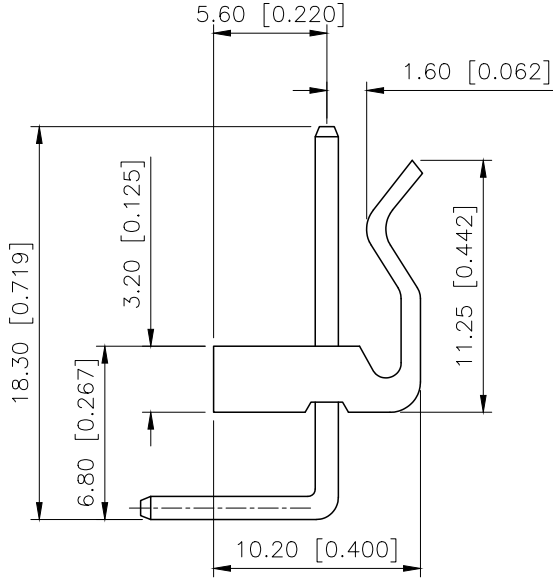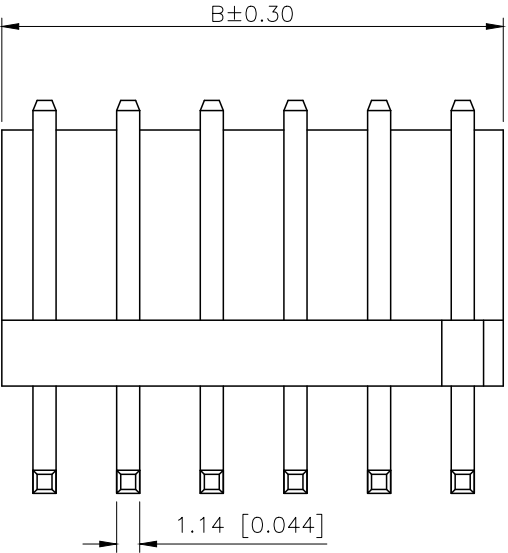

Poles	Dimensions/mm		Poles	Dimensions/mm	
	A	B		A	B
02	3.96	7.92	12	43.56	47.52
03	7.92	11.88	13	47.52	51.48
04	11.88	15.84	14	51.48	55.44
05	15.84	19.80	15	55.44	59.40
06	19.80	23.76	16	59.40	63.36
07	23.76	27.72	17	63.36	67.32
08	27.72	31.68	18	67.32	71.28
09	31.68	35.64	19	71.28	75.24
10	35.64	39.60	20	75.24	79.20
11	39.60	43.56			

X8672WR-XXA-N2SN	Nylon 66 UL 94V-2	Brass	Tin-Plated	X8672H	1,000Pcs
PART NO	Material	Material(Pin)	Finish(Pin)	Suitable XKB Terminal	Q'ty/Rel

ANGULAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	
CHECKED		UNIT:	mm/in
APPROVED		SIZE:	A4

MODEL TYPE:	3.96mm Crimp Style Connectors
PART NO.:	X8672WR-XXA-N2SN
DWG NO.:	