




**Part Number :** [1300480161](#)  
**Product Description :** Micro-Change (M12)  
Double-Ended Cordset, 4 Poles, D-Coded,  
Male (90°) to Male (90°), 24 AWG, PVC Cable,  
1.0m (3.28') Length  
**Series Number :** 130048  
**Status :** Active  
**Product Category :** Circular Industrial  
Cordsets  
**Engineering Number :** E11A06303M010

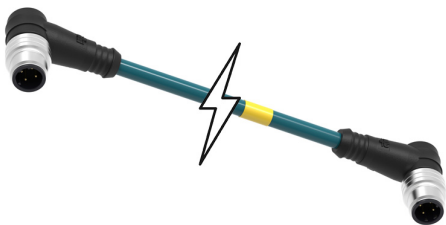


Documents & Resources

Drawings  
[Drawing 1300480161\\_sd.pdf](#)

Product Environment Compliance

Compliance

GADSL/IMDS	Not Relevant
China RoHS	
EU ELV	Not Relevant
Low-Halogen Status	Not Low-Halogen per IEC 61249-2-21
REACH SVHC	Contains Lead; bis(2-ethylhexyl) tetrabromophthalate covering any of the individual isomers and/or combinations thereof per D(2024)4144-DC (27 June 2024)
EU RoHS	Compliant with Exemption 6(c) per EU 2015/863

Multiple Part Product Compliance Statements

- Eu RoHS
- REACH SVHC
- Low-Halogen

Multiple Part Industry Compliance Documents

- IPC 1752A Class C

- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

## EU RoHS Certificate of Compliance

---

### Part Details

#### General

Status	Active
Category	Circular Industrial Cordsets
Series	130048
Description	Micro-Change (M12) Double-Ended Cordset, 4 Poles, D-Coded, Male (90°) to Male (90°), 24 AWG, PVC Cable, 1.0m (3.28') Length
IP Rating	IP67
Performance Category	5e
Product Family	Brad Industrial Ethernet Solutions
Product Name	Micro-Change (M12)
Protocol	N/A
Region	America, Asia, Europe
Type	Double Ended
UPC	78172553199

#### Agency

UL	E200650
----	---------

#### Electrical

Current - Maximum per Contact	1.5A
Voltage - Maximum	30V

#### Physical

Cable Diameter	5.59mm (.220")
Cable Length	1.0m (3.28')
Color - Cable Jacket	Teal
Connector End A	Micro-Change (M12)

Connector End B	Micro-Change (M12)
Coupling Style	Threaded
Gender	Male-Male
Keyway	D-Coded
LED Indicator	No
Material - Cable Jacket	PVC
Material - Connector Body	PVC
Material - Contact	Copper Alloy
Material - Coupling Nut	Nickel-plated Brass
Material - Plating Mating	Gold
Net Weight	74.375/g
Orientation	90° to 90°
Poles	4
Temperature Range - Operating	-20° to +75°C
Wire/Cable Type	N/A
Wire Size (AWG)	24