




Relays & Contactors > Relays > Signal Relays > Standard Signal Relay 2 Form C,2 CO Cont

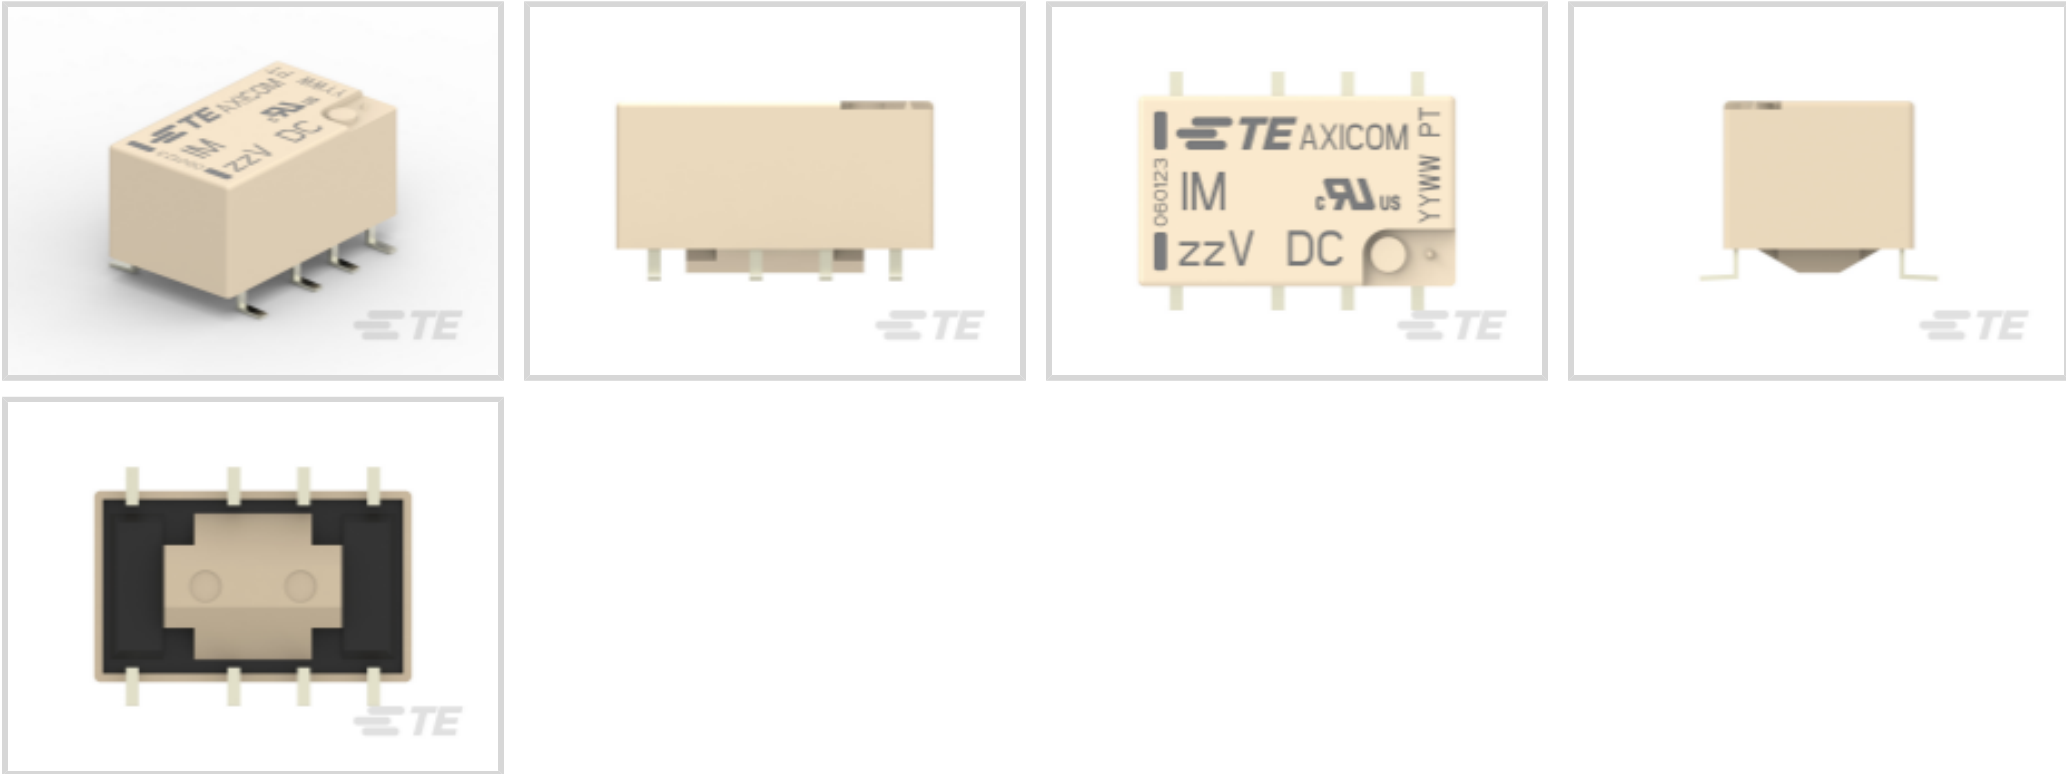

Relay Type: **General Purpose Signal Relay**
Contact Arrangement: **2 Form C DPDT-CO**
Coil Magnetic System: **Monostable, Polarized**
Contact Current Rating: **2 A**
Performance Type: **Standard**

[All Standard Signal Relay 2 Form C,2 CO Cont \(74\)](#)

Features

Product Type Features

Relay Type	General Purpose Signal Relay
------------	------------------------------

Configuration Features

Contact Special Features	Bifurcated/Twin Contacts, Gull Wing
Coil Special Features	Sensitive Version
Contact Arrangement	2 Form C DPDT-CO
Contact Number of Poles	2

Electrical Characteristics

Insulation Initial Dielectric Between Open Contacts	750 Vrms
Contact Limiting Making Current	2 A
Contact Limiting Short-Time Current	2 A
Contact Limiting Continuous Current	2 A
Voltage Standing Wave Ration (HF Parameter)	1.06 @ 100MHz, 1.49 @ 900Mhz



Insulation Initial Dielectric Between Adjacent Contacts	1000 Vrms
Insulation Initial Dielectric Between Contacts & Coil	1800 Vrms
Insulation Initial Resistance	1000000 MΩ
Contact Limiting Breaking Current	2 A
Contact Switching Load (Min)	.1mA @ .0001V
Coil Resistance	194 Ω
Contact Current Rating	2 A
Contact Voltage Rating	220 VDC
Coil Power Rating DC	.1 W
Coil Voltage Rating	4.5 VDC
Contact Switching Voltage (Max)	250 VAC

Signal Characteristics

Isolation (HF Parameter)	-18.8dB @ 900MHz, -37dB @ 100MHz
Insertion Loss (HF Parameter)	-.03dB @ 100MHz, -.33dB @ 900MHz

Body Features

Product Weight	.75 g[.026 oz]
----------------	----------------

Contact Features

Contact Plating Material	Gold
Contact Material	PdRu+Au

Termination Features

Relay Connection Type	PCB Termination
Terminal Configuration	PCB SMT

Mechanical Attachment

Product Mount Type	Printed Circuit Board
--------------------	-----------------------

Dimensions

Product Width	6 mm[.236 in]
Product Length	10 mm[.393 in]
Product Height	5.65 mm[.222 in]

Usage Conditions

Environmental Category of Protection	RTV
Environmental Ambient Temperature (Max)	85 °C[185 °F]
Operating Temperature Range	-40 – 85 °C



Operation/Application

Current Type	DC
Solder Process	Reflow Solder
Coil Magnetic System	Monostable, Polarized
Performance Type	Standard

Packaging Features

Packaging Method	Reel
------------------	------

Other

Length Class (Mechanical)	0 – 10 mm
Environmental Ambient Temperature Class	70 – 85 °C
Height Class (Mechanical)	0 – 6 mm
Coil Power Rating Class	.05 – .3 W
Width Class (Mechanical)	0 – 6 mm
Contact Current Class	0 – 2 A

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Bromine/Chlorine - Br and Cl < 900 ppm per homogenous material. Also BFR /CFR/PVC Free
Solder Process Capability	Reflow solder capable to 260°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits



as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 1462037-9
IM02GR=IM RELAY 140mW 4.5V

Also in the Series | Axicom IM

RJ45 Connectors(2)

Signal Relays(154)

Customers Also Bought

TE Part #5787834-1
STD USB TYPE B, VERTICAL, T/H

TE Part #6469001-1
HM-ZD 4PR RECP 80P

TE Part #6469002-1
HM-ZD 4PR HDR 80P 5.2MM

TE Part #292304-1
STD USB TYPE B, R/A, T/H

TE Part #726388-2
187 FASTON TAB TPBR

TE Part #1734035-1
MINI USB, TYPE B, R/A, SMT

TE Part #1623720-4
CCR2 1K0 10%

TE Part #1-1879417-2
CPF 0603 510K 0.1% 25PPM 1K RL



Documents

Product Drawings

IM12GR=IM RELAY 100mW 4,5V

English

CAD Files

Customer View Model

ENG_CVM_CVM_1462037-2_A.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1462037-2_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1462037-2_A.3d_stp.zip

English

Customer View Model

ENG_CVM_CVM_1462039-3_B5.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1462039-3_B5.3d_stp.zip

English

Customer View Model

ENG_CVM_CVM_1462039-3_B5.2d_dxf.zip

English

3D PDF

3D

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

Axicom Signal and High Frequency Relays (RF Switches) APPLICATION NOTE #2

English

IM_Datasheet

English



Product Specifications

Definitions General Purpose Relays

English

Agency Approvals

VDE Certificate

English