
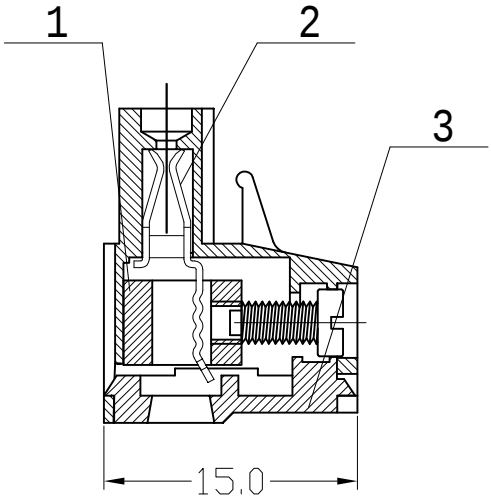
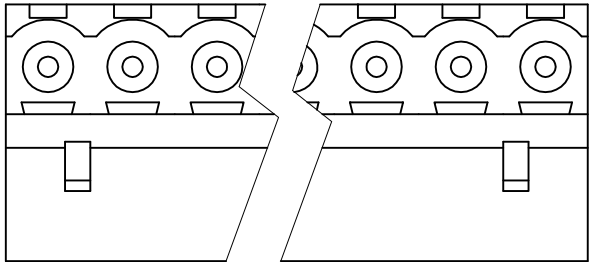


序号/RevNo.	名称/Title	文件编号/File No.
1	XY2500F铜方块	QJ/XYT-21281
2	XY2500F端子	QJ/XYT-21282
3	XY2500F-A塑件后塞	QJ/XYT-21280
4	XY2500F-A塑件	QJ/XYT-21279
5	XY2500F-A一字螺丝 (与XY2102一字螺丝共用)	QJ/XYT-21003

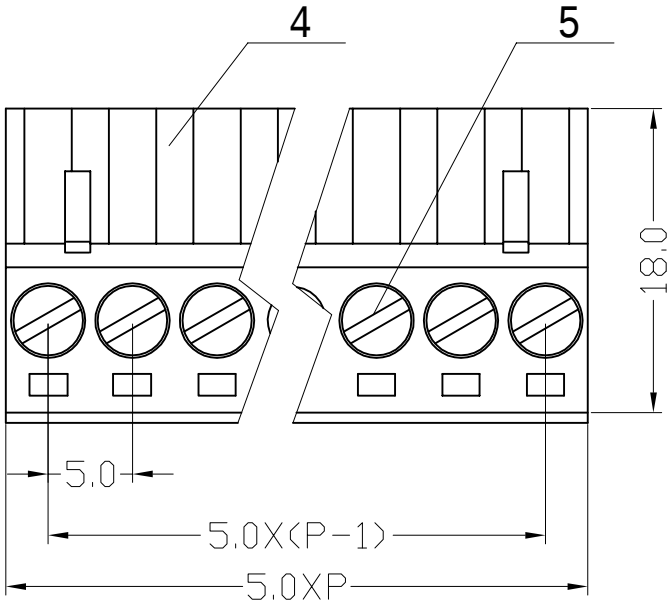

Poles: Anly poles(2P-24P)

Pitch: 5.0mm

Voltage Rating: 300V

Current Rating: 12A

Wire range: 18-12AWG 2.5mm²

Housing: PA66(UL 94V-0)

Wire Cage: Brass,Nickel Plated

Clamp: Phosphor Bronze,Nickel Plated

Screw: M2.5,Steel(A3),Zinc Plated

Torque: 0.4N.m

序号/RevNo.	更改记录/Revision note	签名/Signature	日期/Date
-----------	--------------------	--------------	---------

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance	
 XINYA ELECTRONIC CO., LTD		图名/Title	文件编号/File No.	X. ±0.2	X. ±2°
		XY2500F-A	QJ/XYT-22114	.X ±0.1	.X ±1°
		备注/Remark	页序/Sheet	.XX ±0.05	.XX ±0.5°
				.XXX ±0.01	
				单位/Units: mm	