
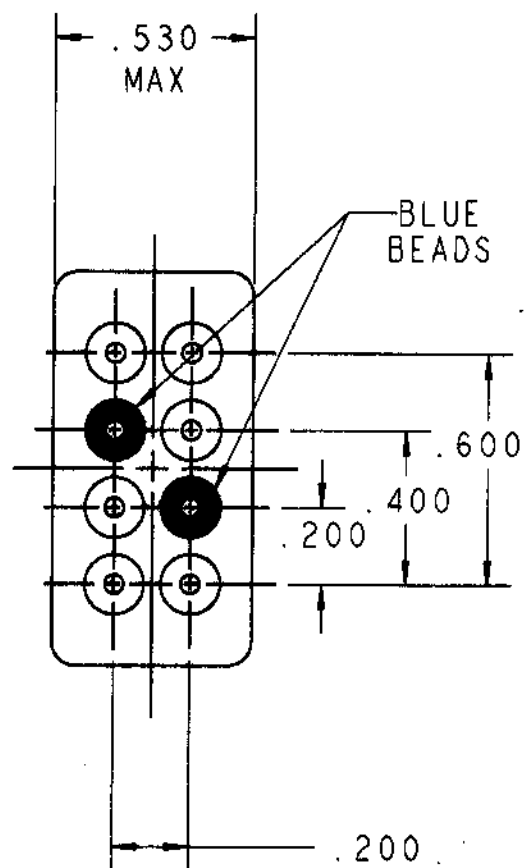


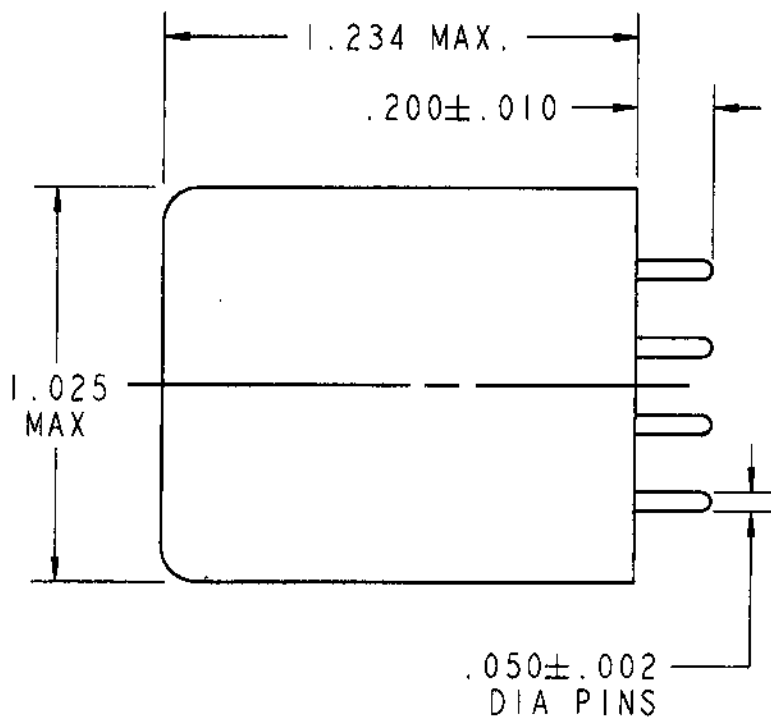

REV. 2

DCO 102764

COIL: @ 25°C

RESISTANCE 300 OHMS ±10%

NOMINAL VOLTAGE 26.5 VDC

MUST OPERATE 14.4 VDC

MUST RELEASE 1.8 VDC

ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS @ 20 g's

SHOCK 50 g's 11 MS. DURATION


TEMPERATURE -55 °C TO +85 °C

NOTES: OPERATE & RELEASE 10 MS MAX.

OPERATE BOUNCE 2 MS MAX.

RELEASE BOUNCE 5 MS MAX.

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: 10 AMPS 28 VDC

5 AMPS 115 VAC/400 Hz RESISTIVE

100,000 OPERATIONS

DR. ASB 11/16/01

CK. TLG 11-16-01

CII Technologies
advanced control electronic solutions

CUST. CII

CUST. NO. STD REV.

"07" RELAY

B07B055AC1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[B07B055AC1](#)