
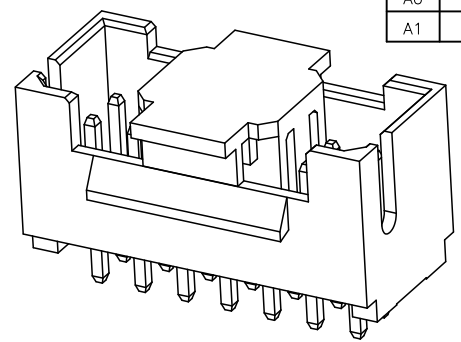


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.9.29	阿树

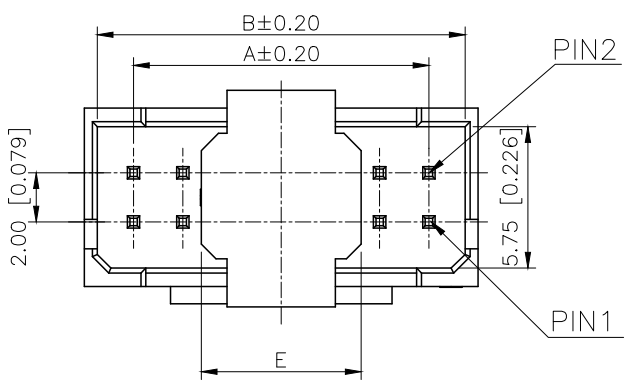





PART NO.:

X2026 W V-2xXX D R-LP SN
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

■SPECIFICATIONS

- Voltage rating:250V AC/DC
- Current rating:3A AC/DC
- Withstanding Voltage:1000V AC/minute
- Temperature range:-40°C~+125°C
- Insulation resistance:≥1000MΩ
- Contact resistance:≤30mΩ

- ①Series No
- ②Category:W-Wafer
- ③Welding Board Angle:V-Stright 180°
- ④Row No.Pin No:2xXX-2x02~2x16Pin
- ⑤Special No:D-With Lock
- ⑥Special No:R-DIP 2.2mm
- ⑦Material:LP-LCP UL94V-0 ,Natural
CAP:LCP UL94V-0 ,Natural
- ⑧Plating Category:SN-Bright Tin Plating

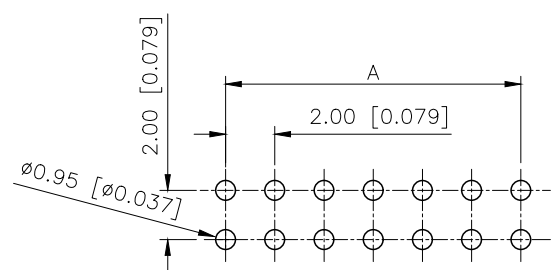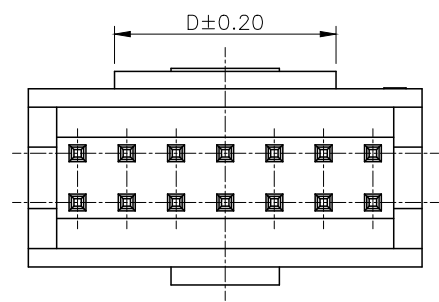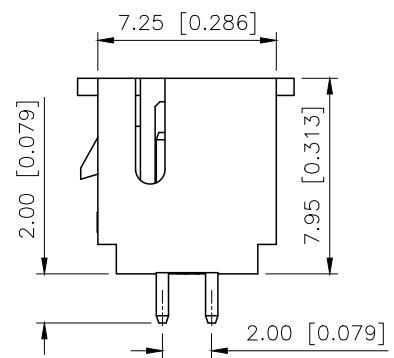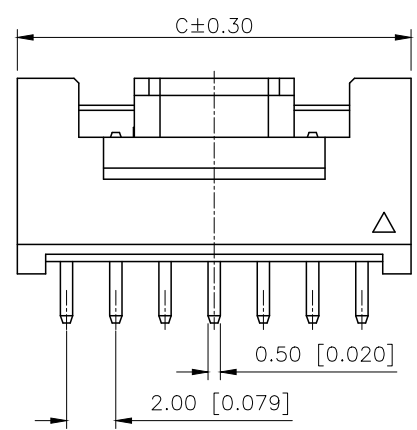

Poles	Dimensions (mm)			D	E	Poles	Dimensions (mm)			D	E
	A	B	C				A	B	C		
2x02	2.00	4.95	6.60	3.00	4.50	2x10	18.00	20.95	22.60	15.00	6.50
2x03	4.00	6.95	8.60			2x11	20.00	22.95	24.60	17.00	
2x04	6.00	8.95	10.60			2x12	22.00	24.95	26.60	19.00	
2x05	8.00	10.95	12.60	5.00	6.50	2x13	24.00	26.95	28.60	21.00	
2x06	10.00	12.95	14.60	7.00		2x14	26.00	28.95	30.60	23.00	
2x07	12.00	14.95	16.60	9.00		2x15	28.00	30.95	32.60	25.00	
2x08	14.00	16.95	18.60	11.00		2x16	30.00	32.95	34.60	27.00	
2x09	16.00	18.95	20.60	13.00		/					

X2026WV-2xXXDR-LPSN	LCP	Brass	X2026H
PART NO	Material	Material(Pin)	Suitable XKB Housing

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN
CHECKED
APPROVED

阿树

VIEW:
UNIT: mm/in
SIZE: A4

MODEL TYPE:
2.00mm Crimp Style Connector
PART NO.:
X2026WV-2xXXDR-LPSN
DWG NO.: