

SACC-V-3CON-PG9/A-GVL 200/240 - Valve connectors



1533301  
<https://www.phoenixcontact.com/us/products/1533301>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Valve connectors, 3-position, Valve connector A, Screw connection, cable gland Pg9, external cable diameter 6 mm ... 8 mm

Commercial data

Item number	1533301
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BF36
Product key	BF2DAA
GTIN	4046356025997
Weight per piece (including packing)	31.9 g
Weight per piece (excluding packing)	31.9 g
Customs tariff number	85366990
Country of origin	HU

# SACC-V-3CON-PG9/A-GVL 200/240 - Valve connectors



1533301

<https://www.phoenixcontact.com/us/products/1533301>

## Technical data

### Notes

Assembly note

**NOTE:** Observe the permissible bending radii when routing cables, since the degree of protection may be at risk if the bending forces are too high. Reduce mechanical loads upstream of the connector, e.g., by using cable ties.

### Product properties

Product type	Valve connectors
Number of positions	3
No. of cable outlets	1
Shielded	no
Pg screw connection	Pg9

### Insulation characteristics

Overvoltage category	II
Degree of pollution	3

### Material specifications

Flammability rating according to UL 94	HB
Seal material	NBR
Material housing valve plug	PA 6
Contact material	CuZn
Valve plug contact insert material	PA 6
Contact surface material	Ni

### Dimensions

#### External dimensions

Outside diameter	6 mm ... 8 mm
------------------	---------------

### Electrical properties

Contact resistance	$\leq 15 \text{ m}\Omega$
Insulation resistance	$> 100 \text{ M}\Omega$
Nominal voltage $U_N$	240 V AC
	240 V DC
Nominal current $I_N$	2 A
Protective circuit	Surge protection; Varistor and rectifier

### Mechanical properties

#### Mechanical data

Insertion/withdrawal cycles	50 (Valve connector)
-----------------------------	----------------------

### Signaling

# SACC-V-3CON-PG9/A-GVL 200/240 - Valve connectors



1533301

<https://www.phoenixcontact.com/us/products/1533301>

Status display	1 LED
Status display present	Yes

## Connection data

Connection method	Screw connection
Conductor cross section	0.34 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
Connection cross section AWG	22 ... 16

## Connector

### Connection 1

Head design	Valve connector
Head thread type	A

## Environmental and real-life conditions

### Ambient conditions

Degree of protection	IP65
Ambient temperature (operation)	-25 °C ... 85 °C (valve plug)


# SACC-V-3CON-PG9/A-GVL 200/240 - Valve connectors

1533301


<https://www.phoenixcontact.com/us/products/1533301>

## Drawings

Dimensional drawing

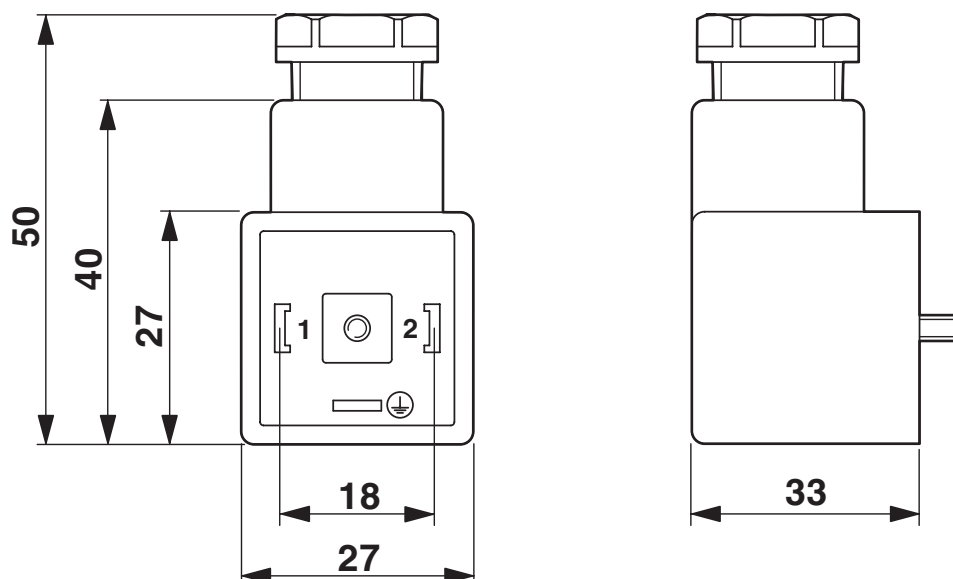

Circuit diagram

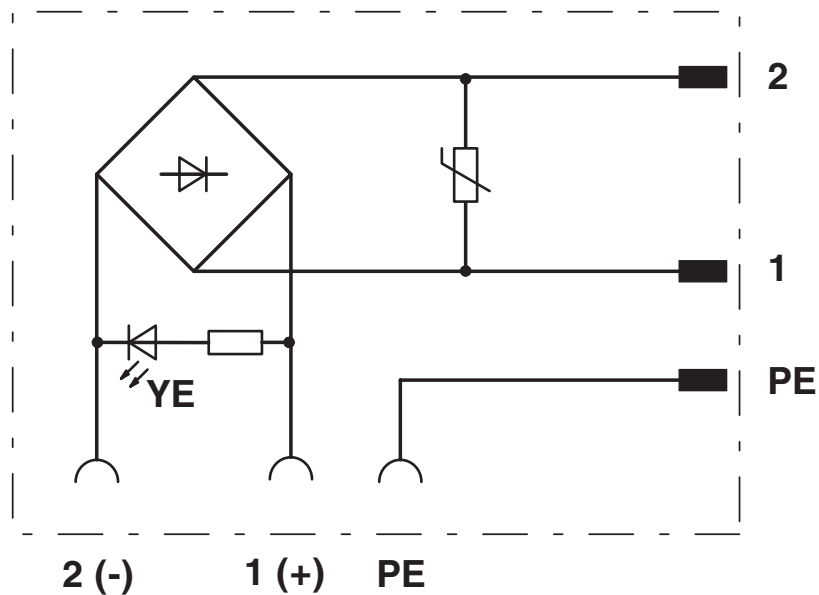

# SACC-V-3CON-PG9/A-GVL 200/240 - Valve connectors



1533301

<https://www.phoenixcontact.com/us/products/1533301>

## Approvals

🔗 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1533301>



**EAC**

Approval ID: RU C-DE.BL08.B.00511

# SACC-V-3CON-PG9/A-GVL 200/240 - Valve connectors



1533301

<https://www.phoenixcontact.com/us/products/1533301>

## Classifications

### ECLASS

ECLASS-11.0	27440105
ECLASS-12.0	27440105
ECLASS-13.0	27440105

### ETIM

ETIM 9.0	EC003623
----------	----------

### UNSPSC

UNSPSC 21.0	31251500
-------------	----------

# SACC-V-3CON-PG9/A-GVL 200/240 - Valve connectors



1533301

<https://www.phoenixcontact.com/us/products/1533301>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)

### China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

### EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	0b2fa4d9-51ec-4ea1-95e4-68ea4c7e5d20

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)