

Dash4™

Features

- Silent operation
- Affordable miniature motion
- Integrated digital controller
- Integrated power drivers
- Low outgassing
- Non-magnetic
- Built-in limit-stop detection
- Suitable for portable devices using high-energy batteries

Benefits

- Eliminates mechanical and electrical noise
- Affordable for high volume consumer devices
- Compatible with complex as well as simple mechanical systems
- Reduces overall system cost and time to market
- Allows seamless integration with digital systems
- Ideal for use with portable consumer devices

The Dash4™ is available now either from the factory, or from our online retailers.

Contact

Miga Motor Company
1250 Addison Street #208
Berkeley, CA 94702

Ph: (510) 486-8301
Fx: (510) 486-8381
sales@MigaMotors.com

www.MigaMotors.com


MMC-022609 r1.0

Linear Shape Memory Alloy Actuator

Miga Motor Company SMA Actuators are the World's thinnest motors: providing high force, long stroke alternatives to old-fashioned motors and solenoids for numerous applications.

Simply connect the new Dash4 & MADv5 Analog Switching Circuit to your device and to a standard power supply (such as high energy batteries), and you are ready to turn on Modern Motion from Miga Motor Company.

The Dash4 is ideally suited for use as a latch release mechanism, but can also be used for many other motion applications.

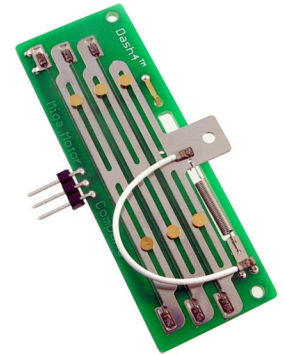

Dash4™ Specifications at a Glance

Stroke:	0.23 inches (5.8mm)
Output Force:	Constant 1.75 lb-f (906 N)
Actuation Time:	50 ms to Position-Hold (Controlled by input voltage or PWM)
Weight:	0.35 ounces (10 grams)
Thickness:	0.11" (2.8mm)
Resistance:	3.2 ohms *
7V actuation:	~2.1 amps, 0.25s *
Mounting:	Holes for 2x 2-56 screws
Electrical:	3-Pin header on 0.1" pitch
Operating Temperature:	-20°F to 140°F (-29°C to 60°C)

*Note: All values are approximate

The MigaOne-series of actuators including the Dash4™ can easily be customized to meet your stroke, force, or power requirement.


Call us today about a custom On-Board SMA Actuator to suit your specific needs.

Actuation speed can be varied either by changing the actuator input voltage, or by using PWM Logic-Gate input signals.

Position control can be done either through an external timing circuit, or use of an external position sensor.

A high level of speed/position control can be achieved!

Dash4 Actuation Speed
(0.23" Stroke)

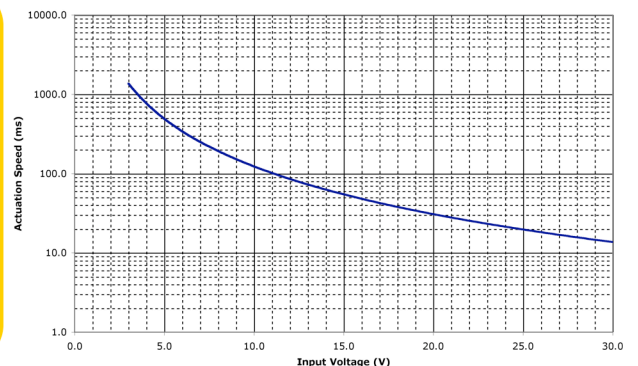

Miga Analog Driver v5



Note: The MADv5 can be built directly onto the MigaOne PCB or any custom actuator application

Motor Dimensions

