

### Surface Mount Schottky Barrier Rectifier

Reverse Voltage - 40 to 60 V

Forward Current - 1 A

### FEATURES

- ♦ Metal silicon junction, majority carrier conduction
- ♦ For surface mounted applications
- ♦ Low power loss, high efficiency
- ♦ High forward surge current capability
- ♦ For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications
- ♦ Lead free in comply with EU RoHS 2011/65/EU directives



### Pinning

| 1.Cathode   | 2.Anode |
|---|---------|
|  |         |

### Marking Code

|        |       |
|--------|-------|
| SSL14F | SSL14 |
| SSL16F | SSL16 |

### MECHANICAL DATA

- ♦ Case: SMAF
- ♦ Terminals: Solderable per MIL-STD-750, Method 2026
- ♦ Approx. Weight: 27mg / 0.00095oz

### Absolute Maximum Ratings and Electrical characteristics


Ratings at 25 ° ambient temperature unless otherwise specified. Single phase, half wave, 60Hz resistive or inductive load, for capacitive load, derate by 20 %

| Parameter   | Symbols        | SSL14F     | SSL16F | Units |      |
|---|----------------|------------|--------|-------|------|
| Maximum Repetitive Peak Reverse Voltage   | $V_{RRM}$      | 40         | 60     | V     |      |
| Maximum RMS voltage   | $V_{RMS}$      | 28         | 42     | V     |      |
| Maximum DC Blocking Voltage   | $V_{DC}$       | 40         | 60     | V     |      |
| Maximum Average Forward Rectified Current   | $I_{F(AV)}$    | 1.0        |        |       | A    |
| Peak Forward Surge Current, 8.3ms Single Half Sine-wave Superimposed On Rated Load (JEDEC method)           | $I_{FSM}$      | 40         |        |       | A    |
| Maximum Instantaneous Forward Voltage at 1 A  | $V_F$          | 0.45       | 0.50   | V     |      |
| Maximum Instantaneous Reverse Current $T_A = 25^\circ C$<br>at Rated DC Reverse Voltage $T_A = 100^\circ C$ | $I_R$          | 0.2<br>5   |        |       | mA   |
| Typical Junction Capacitance <sup>(1)</sup>   | $C_J$          | 180        | 80     | pF    |      |
| Typical Thermal Resistance <sup>(2)</sup>   | $R_{\thetaJA}$ | 90         |        |       | °C/W |
| Operating Junction Temperature Range  | $T_J$          | -55 ~ +150 |        |       | °C   |
| Storage Temperature Range   | $T_{stg}$      | -55 ~ +150 |        |       | °C   |


(1) Measured at 1 MHz and applied reverse voltage of 4 V D.C

(2) P.C.B. mounted with 2.0" X 2.0" (5 X 5 cm) copper pad areas.


**Fig.1 Forward Current Derating Curve**

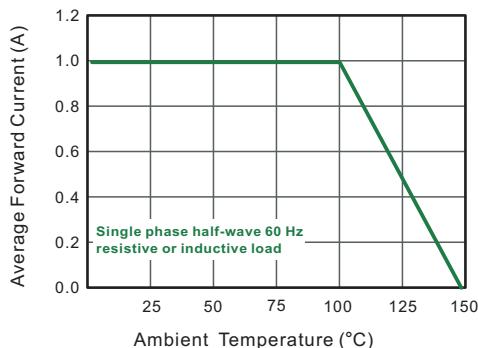


**Fig.2 Typical Reverse Characteristics**

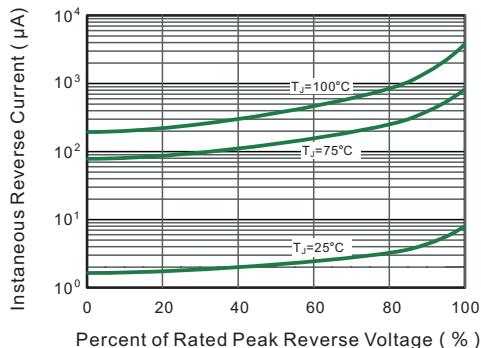


**Fig.3 Typical Forward Characteristic**

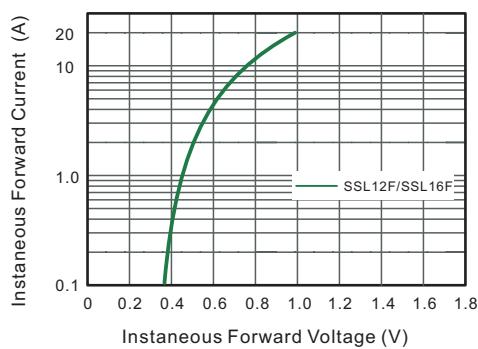


**Fig.4 Typical Junction Capacitance**

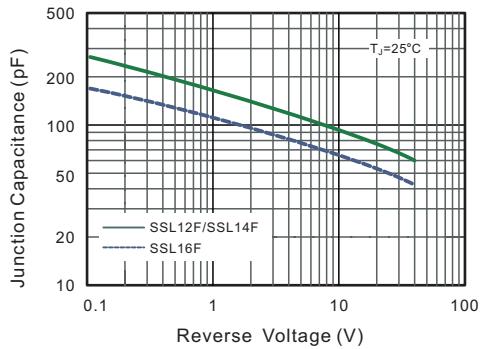

**Fig.5 Maximum Non-Repetitive Peak Forward Surge Current**

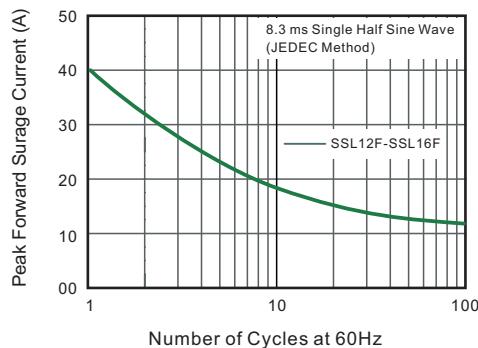


**Fig.6-Typical Transient Thermal Impedance**

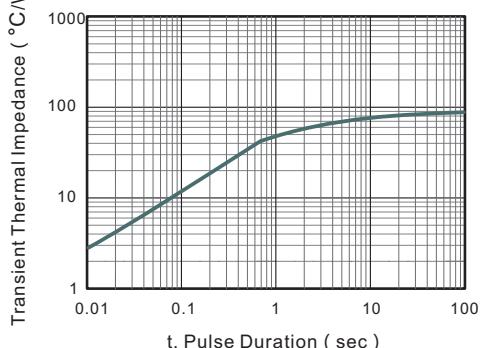

**Package Outline**


**SMAF**

Plastic surface mounted package; 2leads

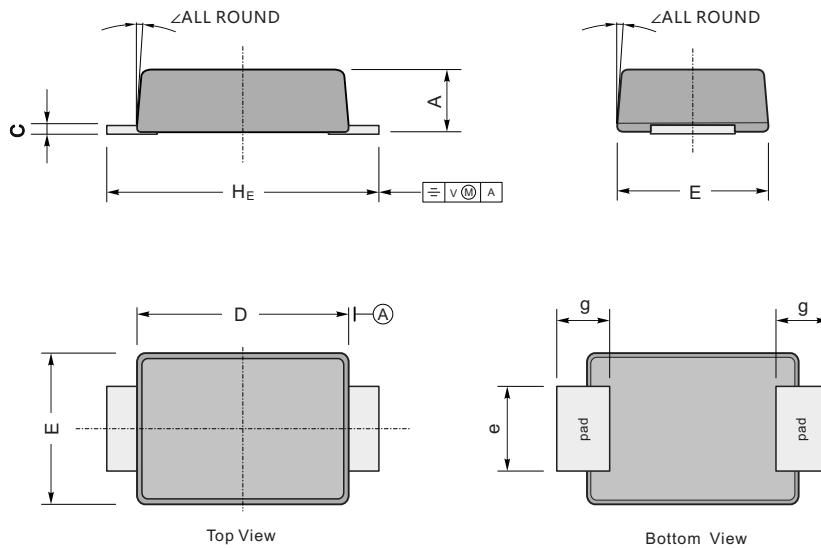

| UNIT |     | A   | C    | D   | E   | e   | g   | H <sub>E</sub> | ∠  |
|------|-----|-----|------|-----|-----|-----|-----|----------------|----|
| mm   | max | 1.1 | 0.20 | 3.7 | 2.7 | 1.6 | 1.2 | 4.9            | 7° |
|      | min | 0.9 | 0.12 | 3.3 | 2.4 | 1.3 | 0.8 | 4.4            |    |
| mil  | max | 43  | 7.9  | 146 | 106 | 63  | 47  | 193            | 7° |
|      | min | 35  | 4.7  | 130 | 94  | 51  | 31  | 173            |    |

**The recommended mounting pad size**

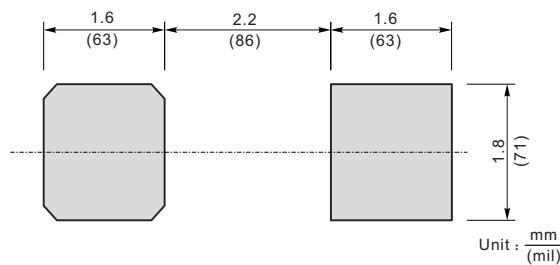

**Summary of Packing Options**

| Package | Packing Description | Packing Quantity | Industry Standard |
|---------|---------------------|------------------|-------------------|
| SMAF    | Tape/Reel, 13" reel | 10000            | EIA-481-1         |
|         | Tape/Reel, 7" reel  | 3000             | EIA-481-1         |