


SECTION A-A

技术指标:

1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
2. 温度范围: -25° C~85° C.
3. 额定电压: 30V, AC/DC.
4. 耐电压: 200V, AC/minute.
5. 接触电阻: ≤0.02Ω.
6. 绝缘电阻: ≥100MΩ.
7. 额定电流: 0.5A AC/DC.
8. 产品料号:

CKT	DIM A	DIM B	CKT	DIM A	DIM B
2	0.80	3.80	16	12.00	15.00
3	1.60	4.60	17	12.80	15.80
4	2.40	5.40	18	13.60	16.60
5	3.20	6.20	19	14.40	17.40
6	4.00	7.00	20	15.20	18.20
7	4.80	7.80	21	16.00	19.00
8	5.60	8.60	22	16.80	19.80
9	6.40	9.40	23	17.60	20.60
10	7.20	10.20	24	18.40	21.40
11	8.00	11.00	25	19.20	22.20
12	8.80	11.80	26	20.00	23.00
13	9.60	12.60	27	20.80	23.80
14	10.40	13.40	28	21.60	24.60
15	11.20	14.20			

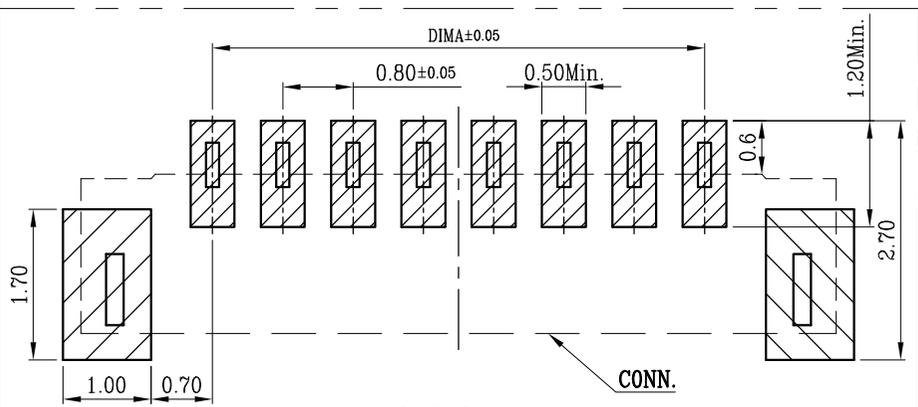

P.C.B Layout

序号	品名	材质
①	0.8- C型卧式WTB胶芯	LCP UL94V-0 自然色
②	0.8- C型立式WTB端子	铜合金/表面镀锡
③	0.8- C型卧式WTB焊片	铜合金/表面镀锡
④	0.8- C型立式WTB胶盖	LCP UL94V-0 黑色

深圳市万骏达电子有限公司 http://www.wanjunda.com		图号 (DWG NO)	单位 (UNIT): MM
		版本 (REV)	比例 (SCALE) 1: 1
		日期 (DATE)	未注公差 TOLERANCE UNSPECIFIED X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 X' ±5' X.X' ±2'
品名 (ITEM NO)	0.80 Pitch C型立式WTB	设计 (DESIGN)	
料号 (PART NO)	WF-0.8-nP-LT	审核 (CHECKED)	
模号 (MDEL NO)		核准 (APPROVED)	