
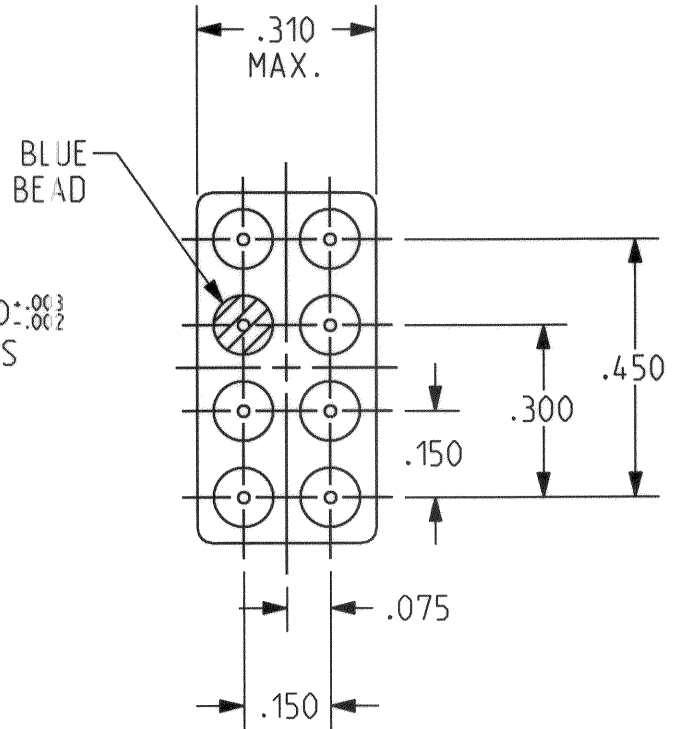


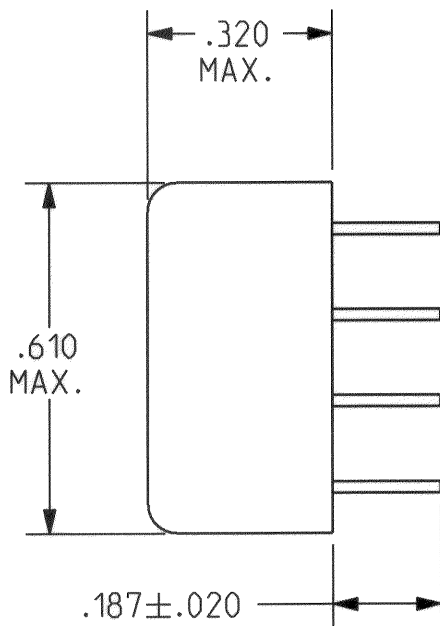

REV. A

DCO 144520

COIL: @ 25°C

RESISTANCE 650 OHMS ± 10

NOMINAL VOLTAGE 18.0 VDC

MUST OPERATE 9.5 VDC

MUST RELEASE 5.6 VDC MAX, 1.0 VDC MIN.

ENVIRONMENT:

VIBRATION 10 Hz TO 3000 Hz @ 30 g's


SHOCK 75 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE 4 MS MAX.

STABILIZATION 2.5 MS MAX.

CUSTOMER DATA SHEET

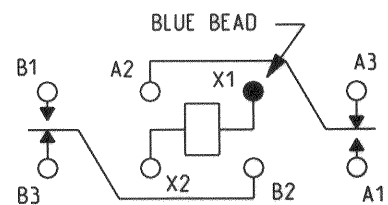

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO
 2 AMPS 28 VDC RESISTIVE
 50,000 OPERATIONS

DR. B.D. 11SEP2008

CK. *[Signature]* 11/08

Tyco Electronics

©COPYRIGHT 2005

TYCO ELECTRONICS CORPORATION
 ALL INTERNATIONAL RIGHTS RESERVED

CUST. QPL

CUST. NO. M39016/13-077P REV.

TE NUMBER

2-1617073-3

CII PART NUMBER

3SBC 2022A2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[M39016/13-077P](#)