


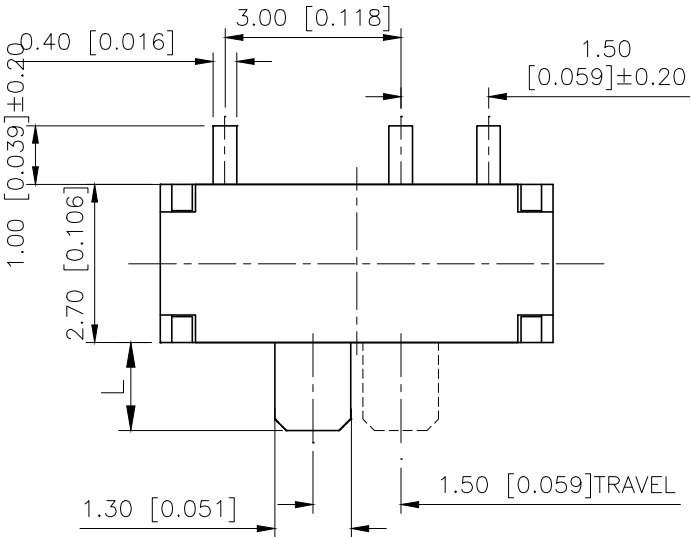


| REVISIONS |         |          |                 |            |        |
|-----------|---------|----------|-----------------|------------|--------|
| REV.      | ECN NO. | LOCATION | DESCRIPTION     | DATE       | DESIGN |
| A0        | N/A     |          | INITIAL RELEASE | /          | /      |
| A1        | N/A     |          | 图面升级整理图面        | 2025.06.17 | 阿树     |

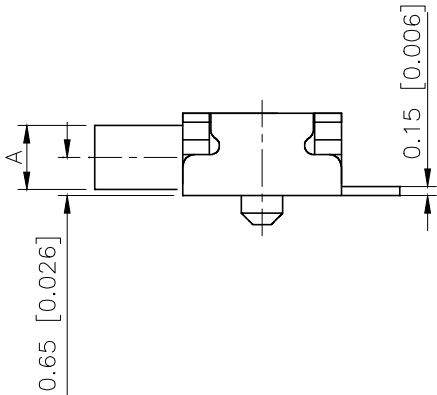

SCHEMATIC

NOTE:  
Rating: DC 12V 50mA  
Operating Force:200±100gf  
Lifetime:10,000 Cycles

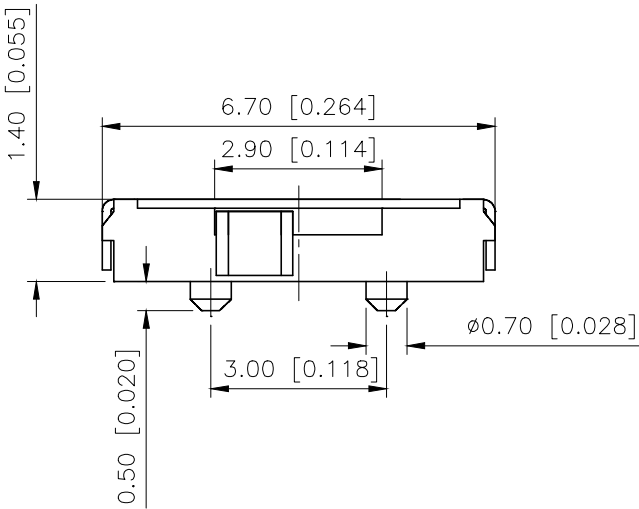

| PAPT NO     | L    |
|-------------|------|
| SK-3296S-L1 | 1.50 |
| SK-3296S-L2 | 2.00 |
| SK-3296S-L3 | 2.50 |

| 5    | Terminal       | 3   | Brass(0.30t)    | ag Plated |
|------|----------------|-----|-----------------|-----------|
| 4    | Contact spring | 1   | Phosphor branze | ag Plated |
| 3    | Base           | 1   | LCP             | Black     |
| 2    | Cover          | 1   | Sus             | Natural   |
| 1    | Keystake       | 1   | PA46            | Black     |
| ITEM | PAPT NAME      | QTY | MATERIAL        | FINISHING |

|                        |       |
|------------------------|-------|
| AuGLAR                 | ±5°   |
| X.                     | ±0.40 |
| X.x                    | ±0.30 |
| X.xx                   | ±0.20 |
| X.xxx                  | ±0.15 |
| UNSPECIFIED TOLERAUCES |       |



|          |    |       |       |             |              |
|----------|----|-------|-------|-------------|--------------|
| DESIGN   | 阿树 | VIEW: |       | MODEL TYPE: | SLIDE SWITCH |
| CHECKED  |    | UNIT: | mm/in | PART NO.:   | SK-3296S-X   |
| APPROVED |    | SIZE: | A4    | DWG NO.:    |              |