
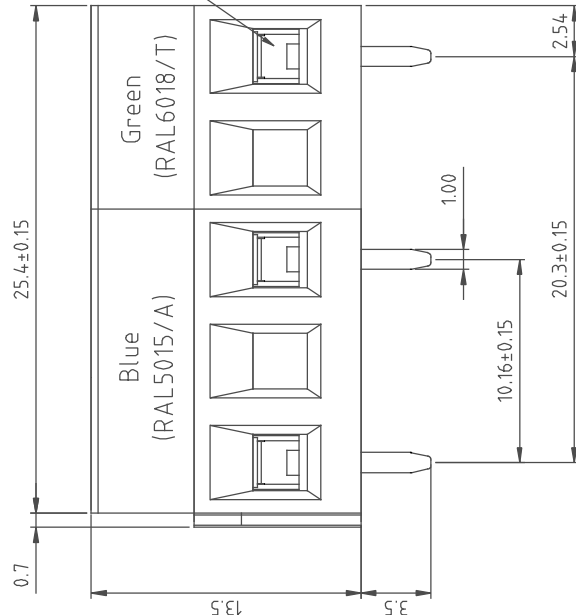
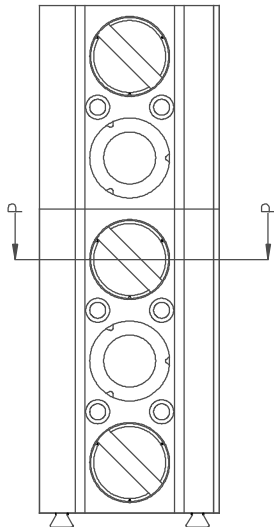


Material:

- Item 1 Terminal housing: Thermoplastic (UL 94V-0)
- Item 2 Clamp: Brass, Ni plated
- Item 3 Wire guard solder pin: Brass, Tin plated
- Item 4 Terminal screw: Steel Zinc plating - "slot type"

Electrical cULus

- Voltage rating: 300VAC
- Current rating: 16A
- Wire range:
- Solid wire (AWG): 12-28
- Stranded wire (AWG): 12-28
- Torque: 3.5Lb-In
- Screw: M3
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval: **cULus**

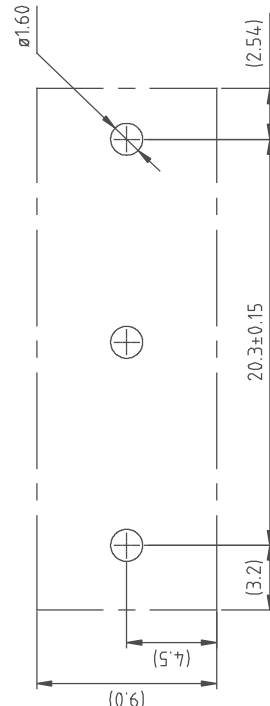

P.C.B LAYOUT

mat'l. code			surface	tolerance	projection	product family	terminal block
itr	ecn	no	date	ASME Y14.5	ASME Y14.5	title	
A	LS	080312	080312	tolerances unless otherwise specified	MM	TERMINAL BLOCK	
			angles	X.±0.5	MM	TERMINAL BLOCK	
			dr	X.±0.3	MM	FIXED HORIZONTAL WIRE INLET	
			engr	X.XX±0.1	scale	dwg no	sheet 1 of 1 size
			chr	dr	FCI	V1052152006FG	A4
			appd	JOSEPH HSIA	080312	type	CUSTOMER Drawing
sheet	revision	A					
index	sheet	1					