
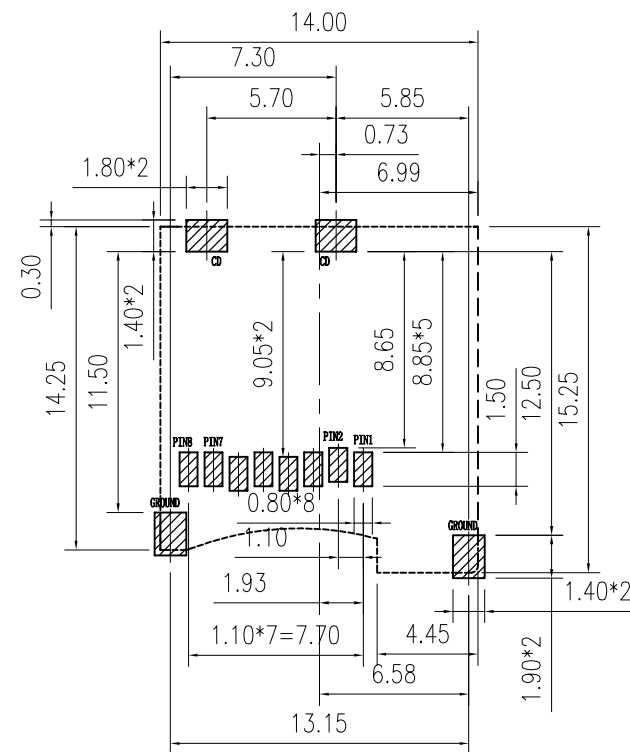
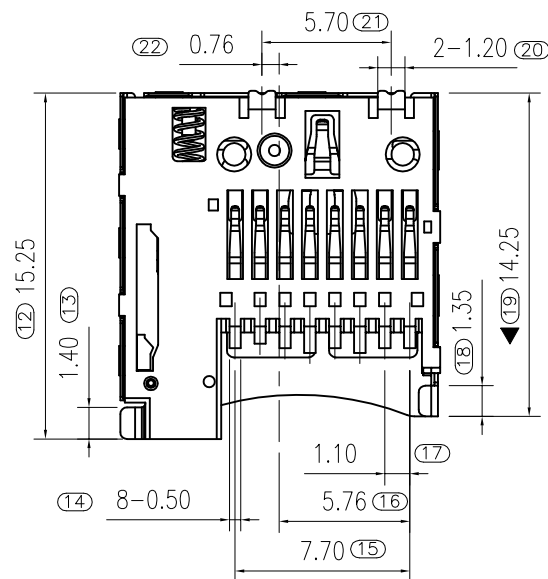


RoHS

REV.	ECN. #	DESCRIPTION	NAME	DATE
A1	ECN2106010	PRODUCT OPTIMIZATION		2021.06.25
A2	PCN2307001	OPTIMIZE THE WELDING		2023.07.31

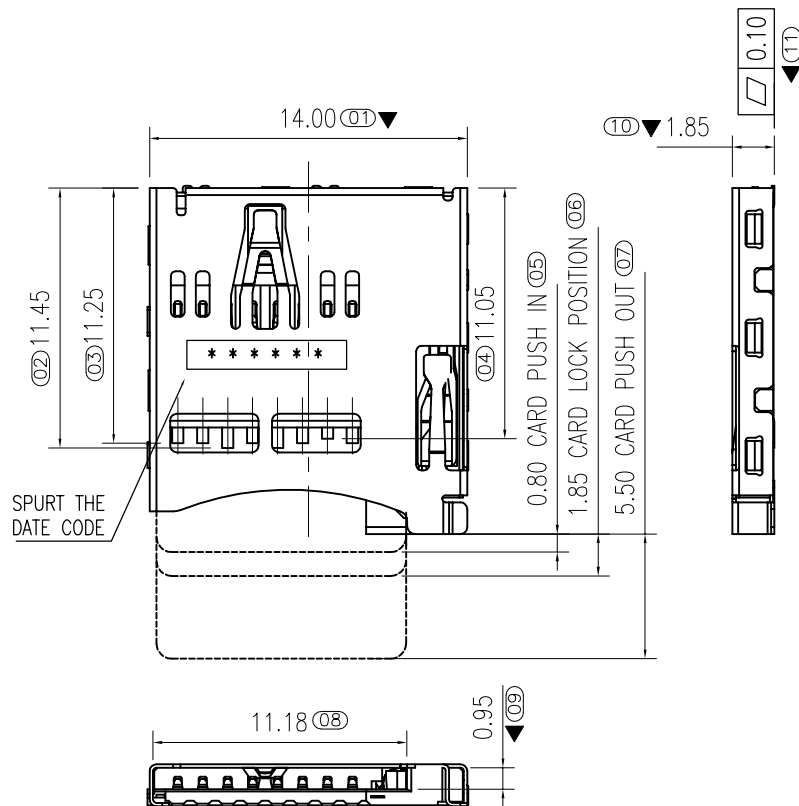

RECOMMEND PCB LAYOUT
GENERAL TOLERANCE ±0.05

NOTES:

1. MATERIAL:

1.1 Housing: High Temperature Thermoplastic
UL94V-0; Color Black.

1.2 Terminal: Copper Alloy.

1.3 Shell: Stainless Steel.

2. PLATING:

2.1 Contact: Contact Area: Au G/F, Solder area: Au G/F ; Under plate Ni 40u"Min all over

2.2 SHELL: Solder Area: Au G/F, Under plate Ni 50u"Min all over

2.3 CD PIN: Contact Area: Au G/F, Under plate Ni 50u"Min all over

3. SPECIALITY:

3.1 Rated current: 1.0A

3.2 Rated voltage: 5V

3.3 Contact Resistance: 100mΩ MAX

3.4 Insulation Resistance: 1000MΩ MIN 500V DC

3.5 Dielectric withstanding voltage: 500V AC.

3.6 Solder ability: 255±5℃, 5±0.5s.

3.7 Durability: 5000 Cycles Min.

3.8 Operating condition: Temperature: -40℃~+85℃;
Humidity 80% R.H MAX

Pin No.	MICRO SD
PIN1	DAT2 1P
PIN2	CD/DAT3 2P
PIN3	CMD 3P
PIN4	VDD 4P
PIN5	CLK 5P
PIN6	VSS 6P
PIN7	DAT0 7P
PIN8	DAT1 8P
PIN9	CARD DETECT
PIN10	

DATE CODE说明: * * * *

日: 01表示1号

07表示7号

月: 01表示一月

12表示十二月

年: 19表示2019年

开关插卡状态

CIRCUIT:		CD		GROUND	
CD	GROUND	CD	GROUND	CD	GROUND
○	○	○	○	○	○
WITHOUT CARD		CARD INSERTED			

MILLIMETERS	INCH
X. ° ±2°	X. ° ±2°
.X ±0.30	.X ±0.012
.XX ±0.20	.XX ±0.008
.XXX ±0.10	.XXX ±0.004
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DONGGUAN JBL TECH CO., LTD COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DONGGUAN JBL TECH CO., LTD	




东莞市金比莱五金塑胶科技有限公司
DONGGUAN JBL TECH CO., LTD


TITLE		1.85H P_P TF Card常闭一体式 无柱		DR		
PART NO.		102XX4462-X		CHKD		
PRO J.		PAGE	1/3	UNITS	mm	APPD
SIZE		A4	SCALE	1:1	DIS NO.	TF013-0XX 客户图

RoHS


PART NUMBER:

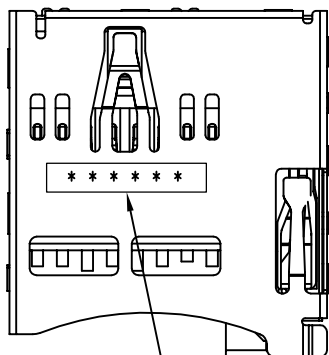


喷码

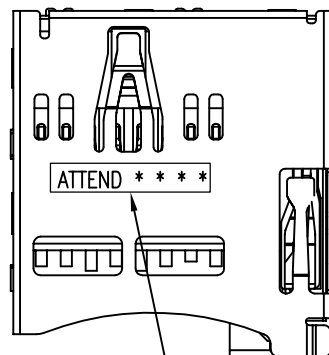

喷码

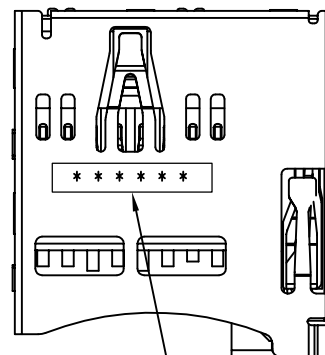

喷码

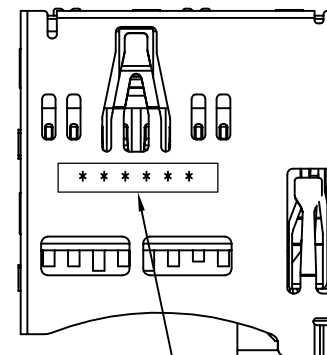

喷码

简码: TF013-010

简码: TF013-011

简码: TF013-013

简码: TF013-015

料号: 102014462

料号: 102014462-D

料号: 102014462-S

料号: 102054462

电镀: 接触区镀金1U", 焊接区G/F

电镀: 接触区镀金1U", 焊接区G/F

电镀: 接触区G/F, 焊接区镀雾锡

电镀: 接触区5U", 焊接区G/F

喷码: YYMMDD

喷码: ATTEND+YYWW

喷码: YYMMDD

喷码: YYMMDD

DATE CODE说明:

YY MM DD

日: 01表示1号

.....
07表示7号

月: 01表示一月

.....

12表示十二月

年: 19表示2019年

ATTEND YY WW

周: 01表示第一周

.....
12表示第十二周


年: 19表示2019年

客户指定码

MILLIMETERS	INCH
X.° ±2°	X.° ±2°
.X ±0.30	.X ±0.012
.XX ±0.20	.XX ±0.008
.XXX ±0.10	.XXX ±0.004
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DONGGUAN JBL TECH CO., LTD COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DONGGUAN JBL TECH CO., LTD	


		东莞市金比莱五金塑胶科技有限公司 DONGGUAN JBL TECH CO., LTD						
TITLE		1.85H P_P TF Card常闭一体 式 无柱			DR			
PART NO.		102XX4462-X			CHKD			
PRO J.		PAGE	2/3	UNITS	mm	APPD		
		SIZE	A4	SCALE	1:1	DIS NO.	TF013-0XX 客户图	

RoHS

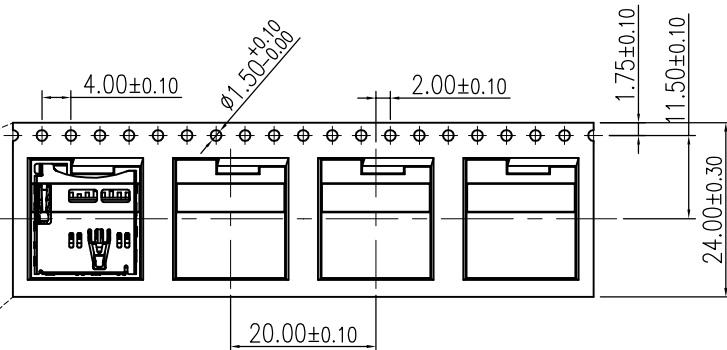


NOTES:

- 1:Packing quantity per plate:1000PCS/Plate
- 2:Loading and packing method

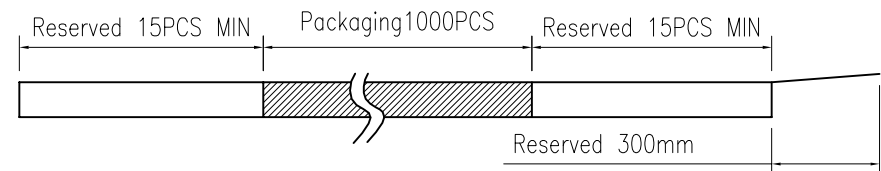

- 3: Total packaging:10000PCS/Box

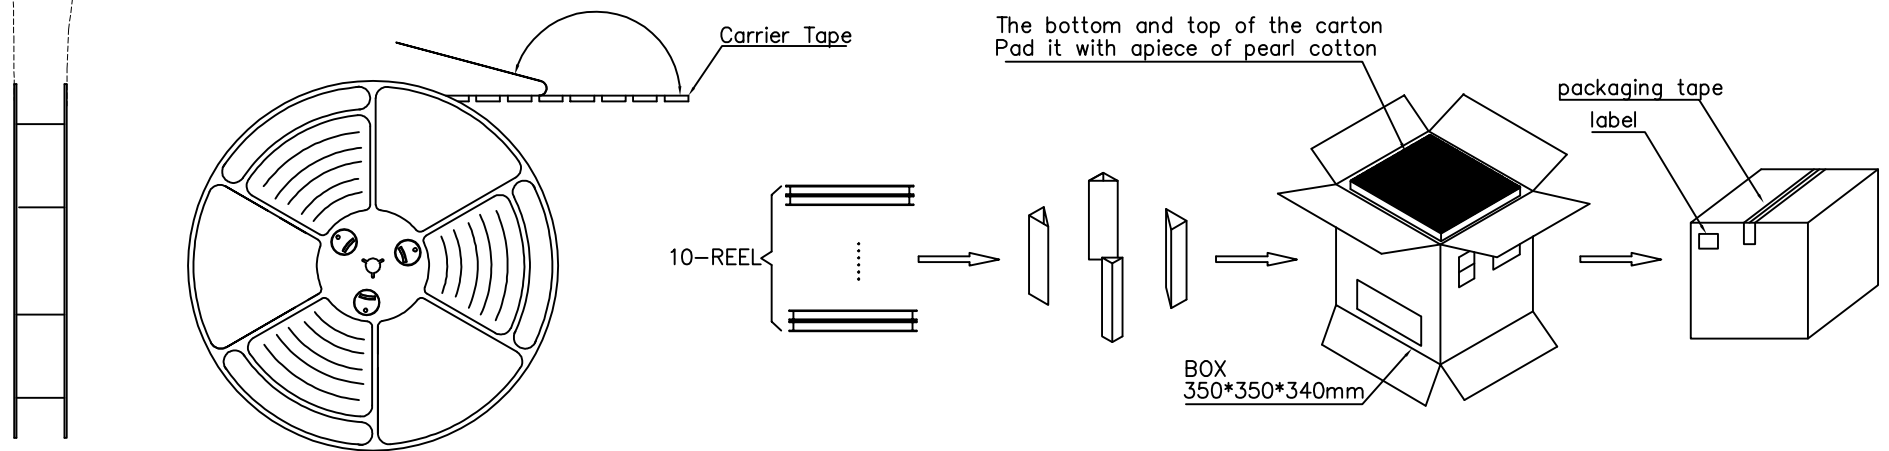

Part Number	Description	Quantity
303020188	Carrierband (BLACK, PS W=24 PH=20)	204M
303040009	Box (K=K, T=7.0, 350*350*340)	1PCS
303060001	PE Bag (T=0.08mm, 730*760*730)	1PCS
303070024	Self-adhesive (W=21.30)	207M
303110001	Beam (K=K, T=7.0, 95*95*290)	4PCS
303130001	Pearl Wool (340*340*18)	2PCS
303180017	REEL (BLUE, 13Inches*24mm, Φ 330)	10PCS
102XX4462-X	1.85H P-P TF Card 常闭一体式卡座<TF013-XXX>	10000PCS

MILLIMETERS		INCH		 东莞市金比莱五金塑胶科技有限公司 DONGGUAN JBL TECH CO., LTD			
X. °	±2°	X. °	±2°				
.X	±0.30	.X	±0.012	TITLE		1.85H P-P TF Card常闭一体式 无柱	DR
.XX	±0.20	.XX	±0.008	PART NO.		102XX4462-X	CHKD
.XXX	±0.10	.XXX	±0.004	PRO J.		PAGE 3/3	UNITS mm
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DONGGUAN JBL TECH CO., LTD COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DONGGUAN JBL TECH CO., LTD				SIZE		A4	SCALE 1:1
				DIS NO.		TF013-0XX	客户图