


Jul.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

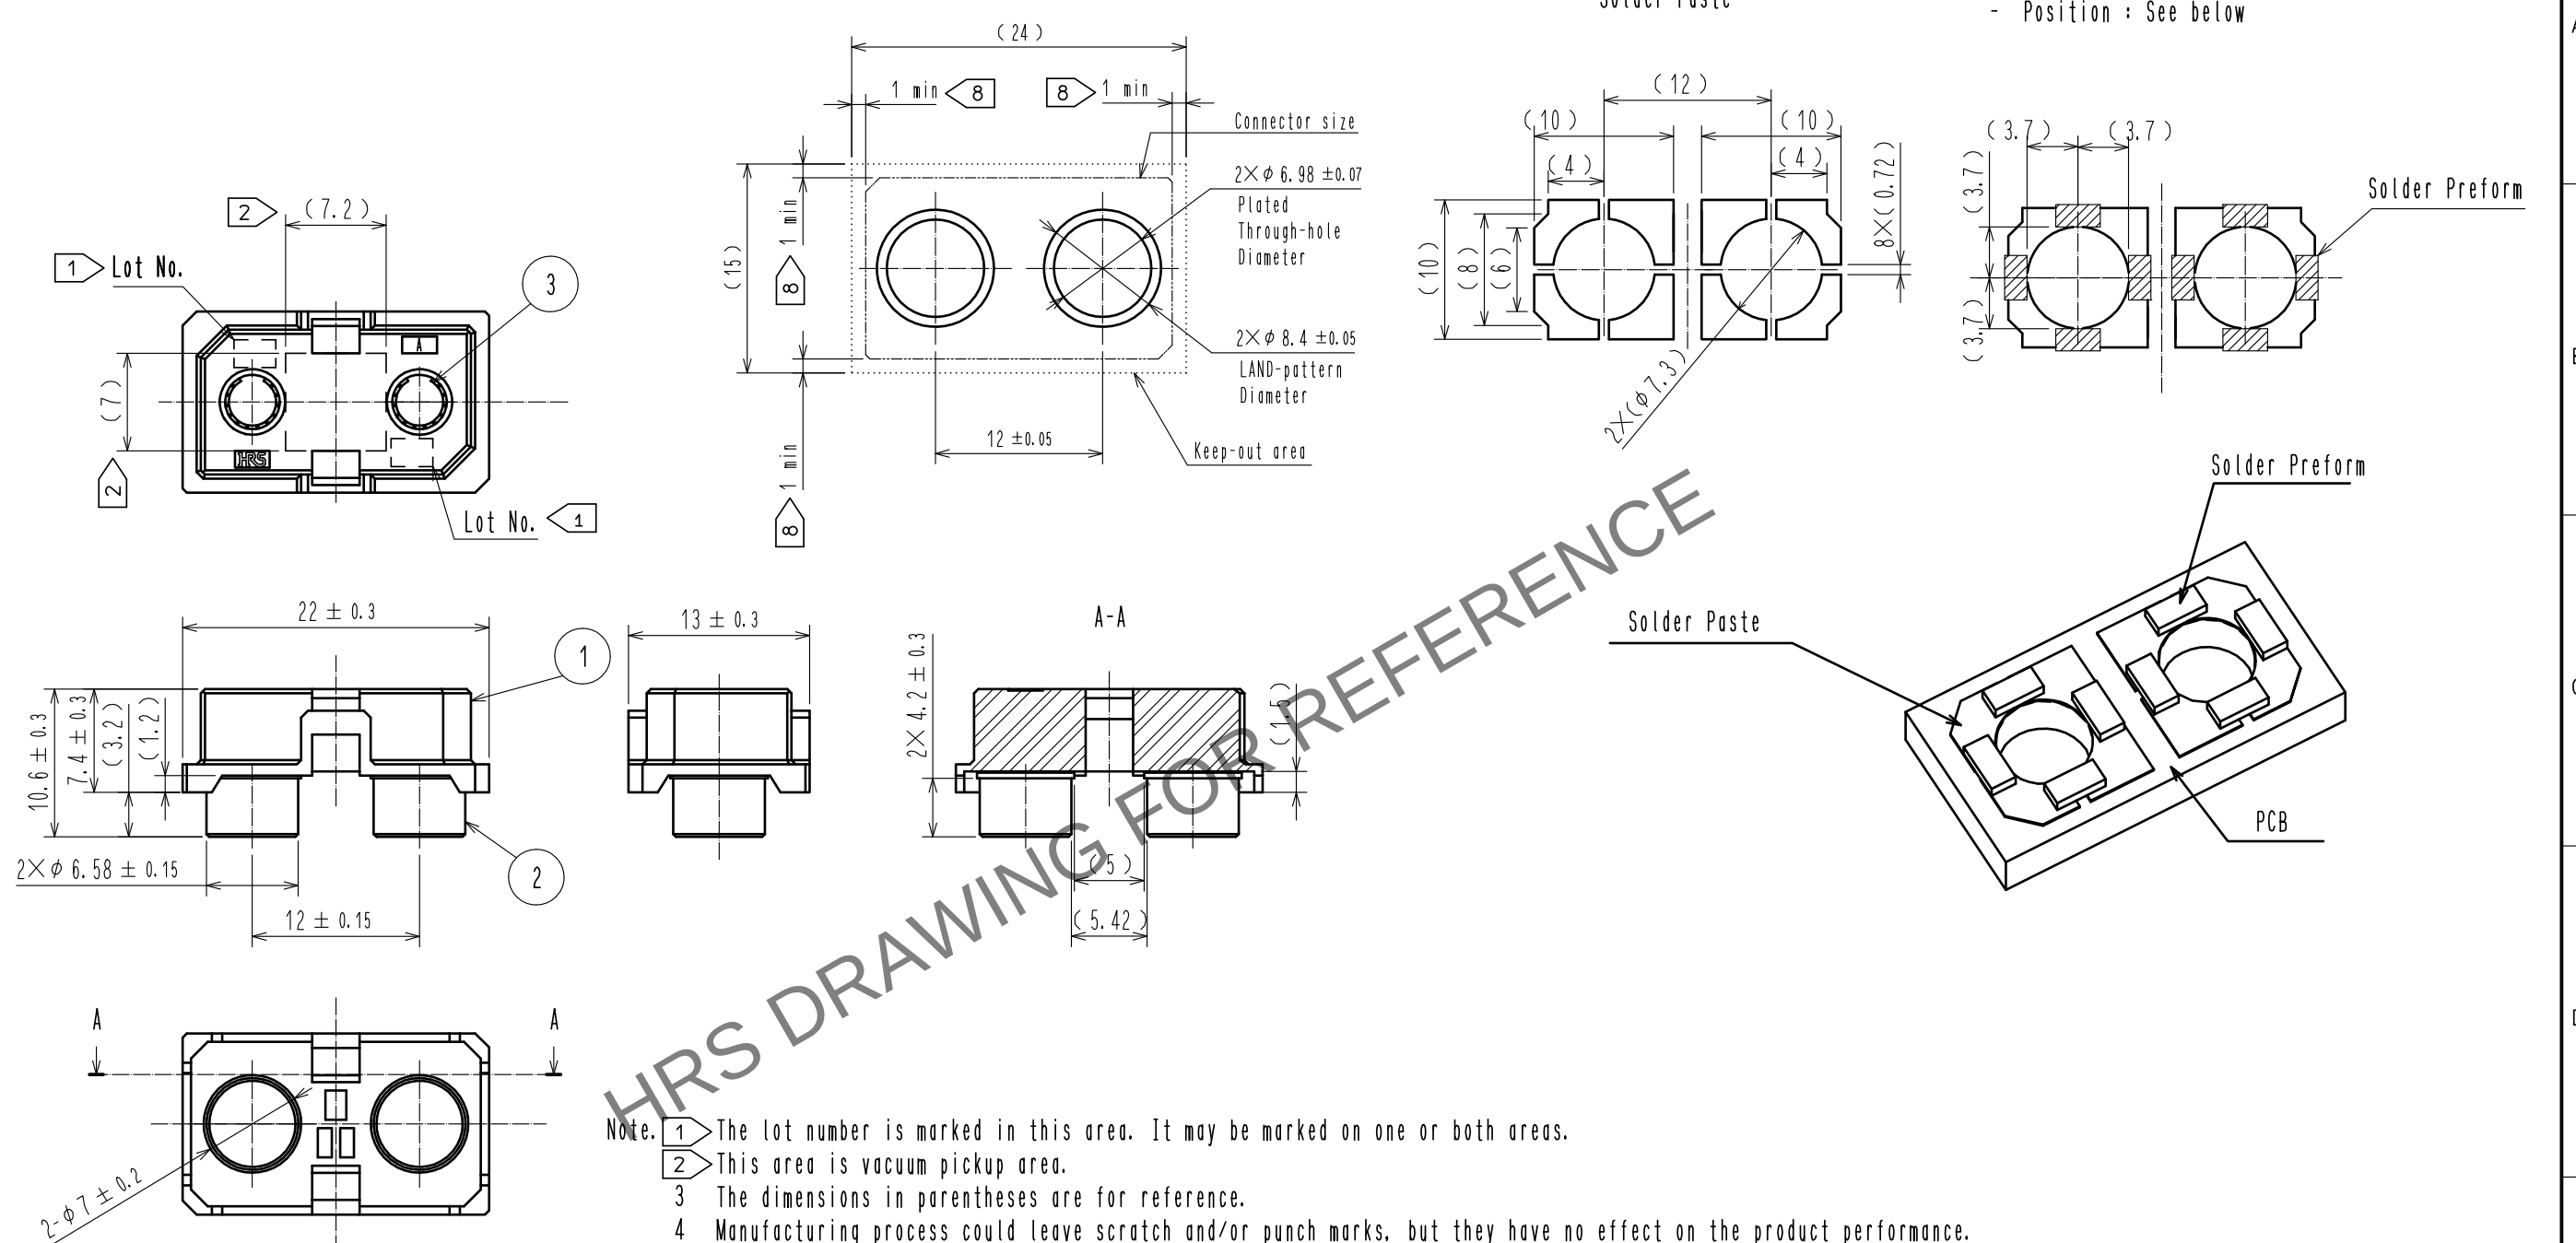

- Note.
- 1 The lot number is marked in this area. It may be marked on one or both areas.
 - 2 This area is vacuum pickup area.
 - 3 The dimensions in parentheses are for reference.
 - 4 Manufacturing process could leave scratch and/or punch marks, but they have no effect on the product performance. And the dark spots might occasionally occur on molded plastic.
 - 5 Since silver plating is used for this product, if it is left in the atmosphere for a long time, plating may become drab.
 - 6 Since this product is point symmetry, direction of mounting does not have a rule.
 - 7 This product is RoHS compliant.
 - 8 Please do not mount other devices in this area.
 - 9 Packing for this product is embossed carrier tape packing. (250pcs/RL)
 - 10 The insertion direction of a connector may change.
 - 11 This connector can be soldered as part of the normal SMT process. Please use the solder preform design outlined above. For more detail on this process, please refer to the design guide (EATD-F0804-00).

2		Brass	Over Plating : Silver 5.1μm	5	Polyester	(Top Cover Tape)
1		LCP	Under Plating : Nickel 1.3μm	4	Polystyrene	(Embossed Carrier Tape)
			Gray UL94V-0	3	Copper alloy	Contact Area : Gold 0.76μm
NO.		MATERIAL	FINISH . REMARKS	NO.	MATERIAL	Under Plating : Nickel 1.3μm
UNITS		mm	SCALE	2 : 1	COUNT	DESCRIPTION OF REVISIONS
						DESIGNED
						CHECKED
						DATE
						APPROVED : TM. MATSUO
						20220216
						CHECKED : TS. OSHIDA
						20220215
						DESIGNED : KM. KUBOTA
						20220215
						DRAWN : KM. KUBOTA
						20220215
						DRAWING NO.
						EDC-339734-00-02
						PART NO.
						IT-PD-2S-DIR
						CODE NO.
						CL0636-0601-0-00
						1/2

Jul.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

