

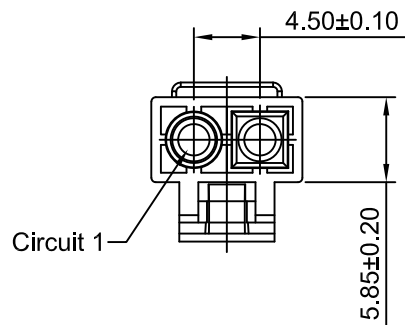




2P

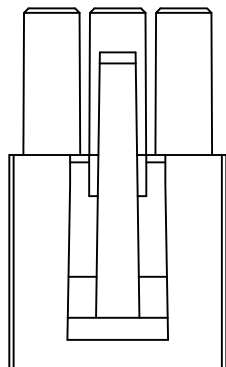

3P

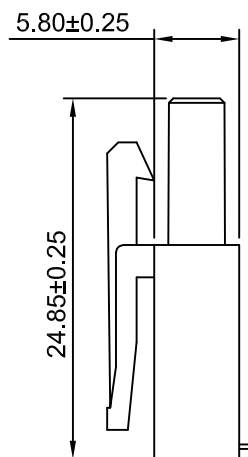

4P

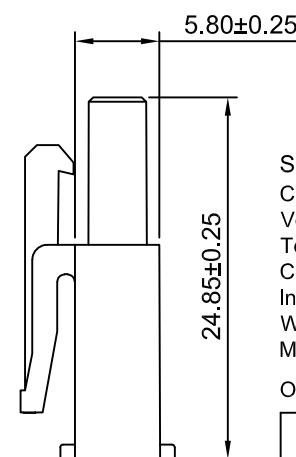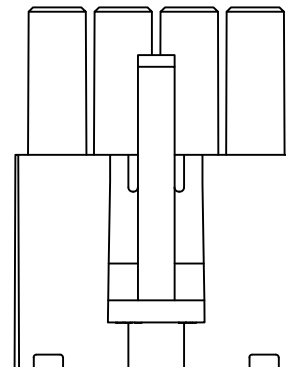

SPECIFICATIONS:

Current Rating: 10A AC,DC
Voltage Rating: 300V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 7mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)	
	A	B
C1301HF-2P	4.50	10.30
C1301HF-3P	9.00	14.80
C1301HF-4P	13.50	19.30

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	1.5:1	1 of 1
DRWN	CHK'D	APPR
Wenmin Luo	Diankui Wan	Jack Yin

General Tolerances
x,xx±0.25
x,xxx±0.20
x,xxxx±0.15
ANGLES ±1°



TITLE		
4.50mm Pitch Housing		
DRAWING NO.		REV
C1301HF-XP		A2

REV	DESCRIPTION	DATE
A2	CHANGE THE DRAWING	2021.11.25
A1	CHANGE THE DRAWING	2021.09.26
A0	NEW RELEASE	2017.04.20