
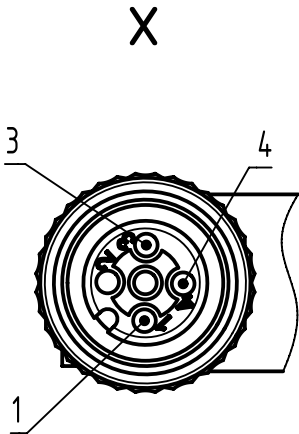



Connector Location A

Connector Location B

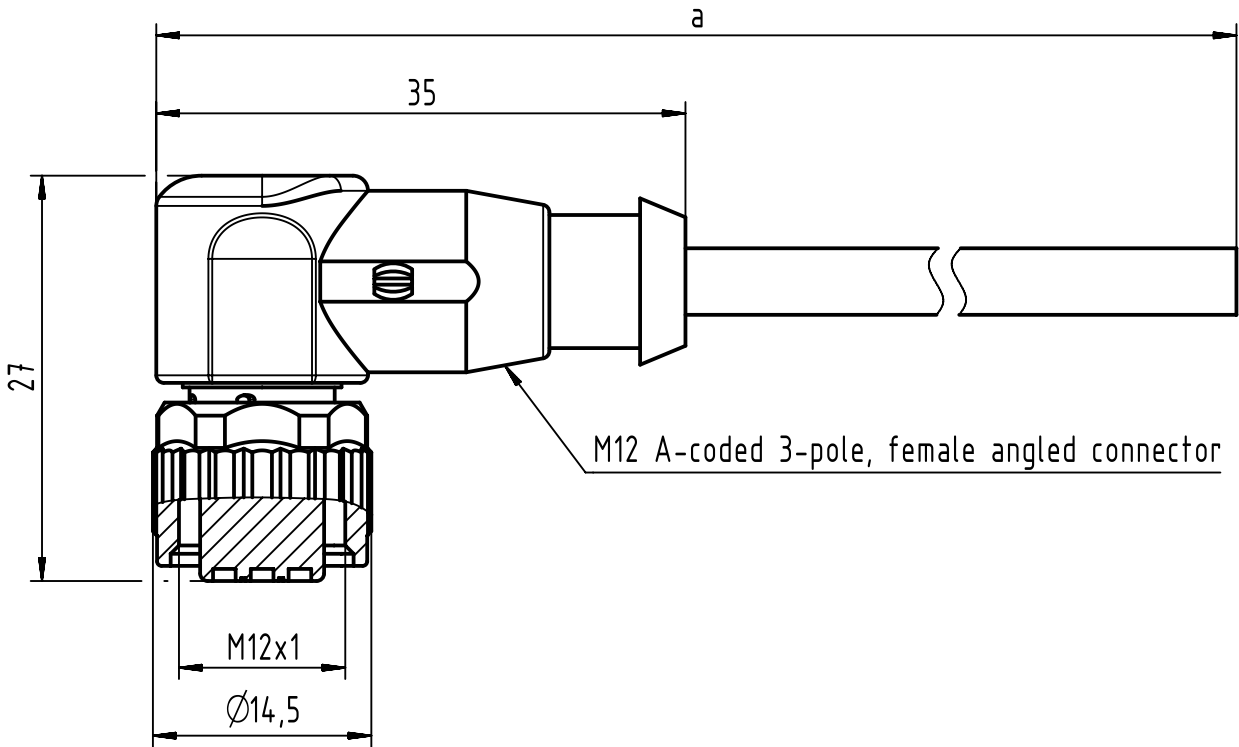

Loading-Plan:

- 1 brown
- 3 blue
- 4 black

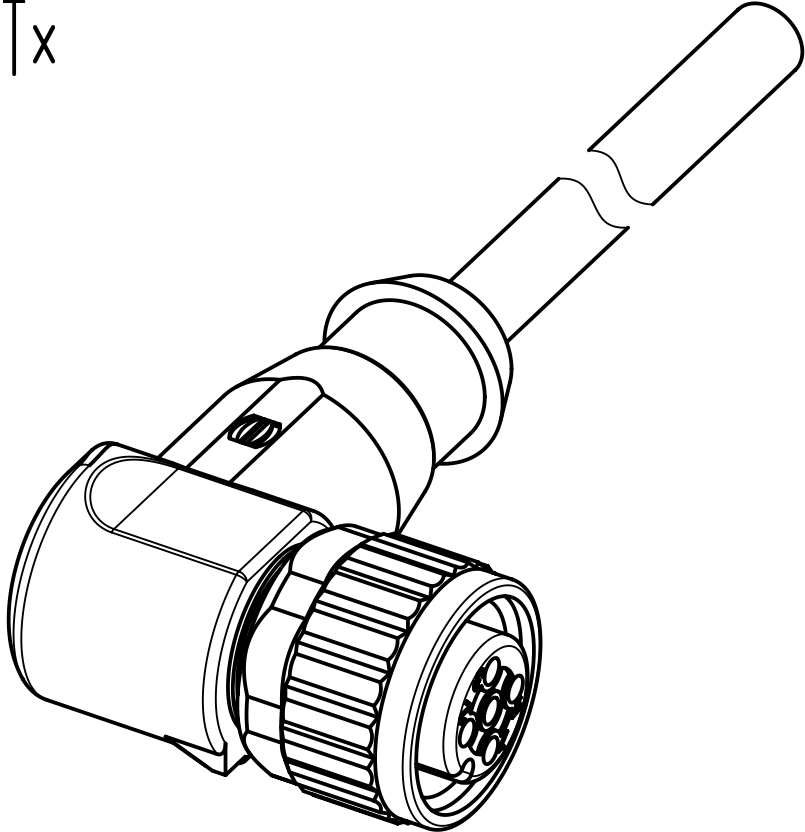

- Protection level: IP67
- Temperature range: -25°C ... +80°C

length in "1m" step	40	XXX=400
	39	XXX=390
	.	.
	12	XXX=120
	11	XXX=110
length in "0.1m" step	10	XXX=100
	9.9	XXX=099
	9.8	XXX=098
	.	.
	0.4	XXX=004
	0.3	XXX=003
	0.2	XXX=002
	0.1	XXX=001
Step	a [m]	XXX

4.0 to 40	+1%
0.1 to 3.9	+0.04
a [m]	Tolerance

Part no.	213487003XXXXXX
Type of cable	XX
PVC grey, 3x0.34mm²	XX=83
PUR black, 3x0.34mm²	XX=90



All rights reserved
Department HCS - RO
HARTING Customised Solutions
D-32427 Minden

Created by
MUNTEANV

Inspected by
COSTEA

Standardisation
AVRAM

Date
2017-10-23

State
Final Release

Title
M12 A-coded Cable Assembly

Type
TB

Number
213487003XXXXXX

Doc-Key / ECM-Nr.
100578809/UGD/009/B
500000126944

Rev.
B

Page
1/1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

HARTING:

[21348700383100](#) [21348700390050](#) [21348700383020](#) [21348700390010](#) [21348700390015](#) [21348700390075](#)
[21348700383005](#) [21348700383015](#) [21348700390005](#) [21348700390100](#) [21348700383075](#) [21348700390020](#)