




REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.06.24	阿树

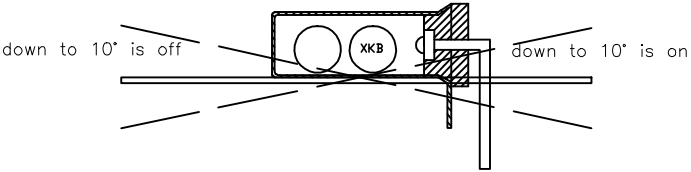

Voltage: < 12V
Current: < 20mA
Conduction time: 2ms
Closed circuit resistance: < 10m ohm
Open circuit resistance: > 10m ohm
High temperature resistance: 120 degrees
Terminal tension: 500gf / min
Humidity: 25~95%RH
Operating life: 100000 times

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	

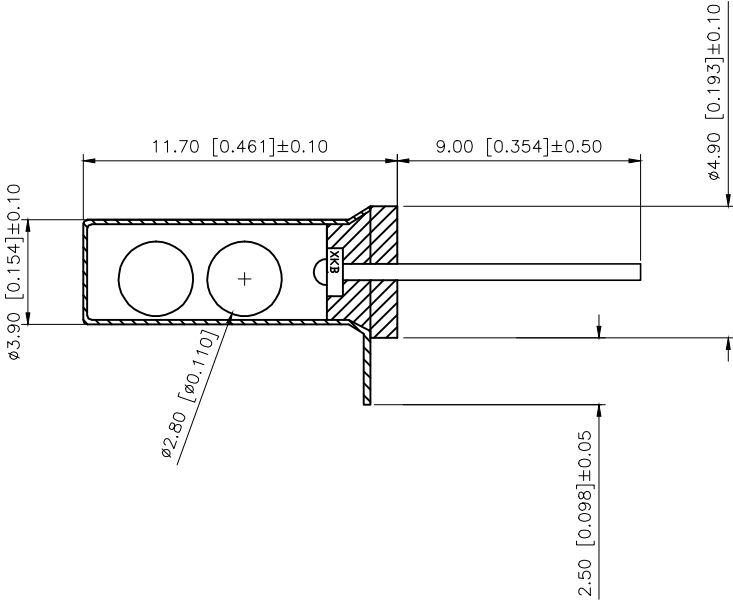

⑦	Heat shrinkable tube	1	Pet heat shrinkable tube	
⑥	Rubber stopper	1	PLC	
⑤	Ball	1	Phosphor copper	Nicke
④	Ball	1	SUS	Silver
③	PIN A	1	Brass	Nicke
②	PIN B	1	Brass	Gold
①	steel tube	1	Brass	Nicke
ITEM	PAPT NAMF	QTY	MATERIAL	FINISHING

DESIGN	阿树	VIEW:	MODEL TYPE:
CHECKED		UNIT: mm/in	Ball switch
APPROVED		SIZE: A4	PART NO.: SW-168DZW-9G
			DWG NO.:

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A1