

Indicator

17-
381351Z

Distribution by
DigiKey

DigiKey



<https://digikey.eao.com/p/17-381351Z>

Your product:



17-381351Z Indicator

FRONT

Reflector:	Plastic, Black
Front form:	round
Front dimension:	Ø 18,3 mm

MOUNTING

Mounting type:	Panel mounting
Mounting cut-out:	Ø 16.2 mm
Design:	raised

OPERATING-/INDICATION PART

Illumination colour:	Green
Lens:	flush

ELECTRICAL CHARACTERISTICS

Operating voltage:	24 V DC ± 10 %
Operation current:	15 mA ± 15 %
Lumi. Intensity:	870 mcd
Polarity:	Anode (+) Brass plug-in connector Cathode (-) Brass tinned plug-in connector

MECHANICAL CHARACTERISTIC

Weight:	0.007 kg
Tightening torque:	Fixing nut max. 0.2 Nm

Terminal: Plug-in terminal, 2.8 x 0.8 mm

AMBIENT CONDITION

Operating temperature: – 20 °C ... + 60 °C

IP Protection: IP40 front side, IP65 front side, according to IEC 60529

Storage temperature: – 25 °C ... + 80 °C

CERTIFICATE

Conformities: 2011 / 65 / EC (RoHS), 2014 / 35 / EU (230 VAC)

RoHS: RoHS compliant

REACH: REACH compliant

Approbations: UL


OTHER

Short Description: Indicator, Ø 16.2 mm, Ø 18,3 mm, round, Plug-in terminal, 2.8 x 0.8 mm, Green


Kind of illumination: Single-LED

Hints: Connectors: Brass terminal = anode (+); brass tinned terminal = cathode (-), IP67 front side gap between LED and reflector and gap between reflector and frontplate sealed to IP67 when using the supplied gasket., The plastic is limited resistant to chemicals.


Wiring diagrams:

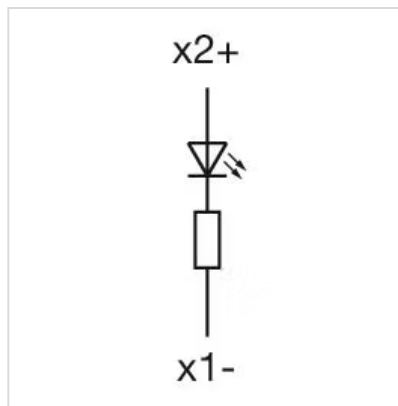

Mounting cut-outs:

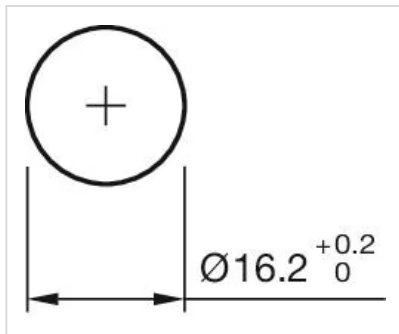

Dimension drawings:

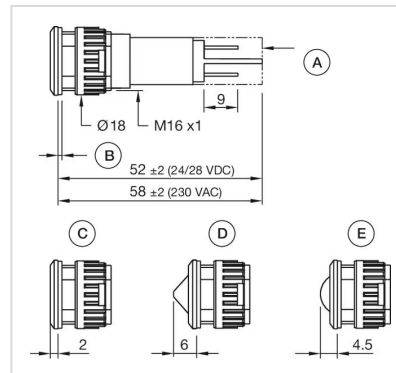

A = Protection tube (only 230 VAC)

B = 1 gasket

C = flat

conical

D = round