



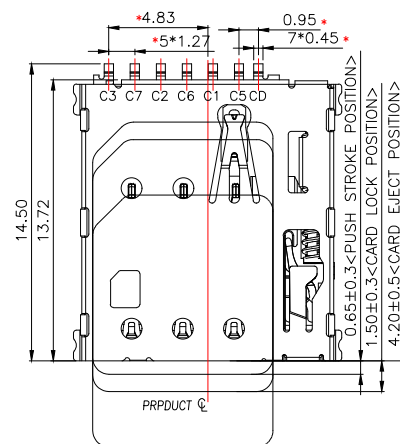


3D VIEW

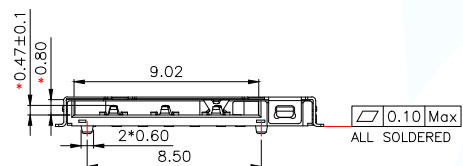

PIIN/NO	ASSIGNMENT
C1	VCC
C2	RST
C3	CLK
CD	Detect Switch
C5	GND
C6	VPP
C7	I/O



NOTES:

1.MATERIAL:

HOUSING: High Temperature Thermoplastic
Terminal:Copper Alloy
Shell: Stainless Steel



2.PLATING:

Terminal:50u" Ni UNDERPLATED OVERALL
G/F PLATED ON CONTACT AREA AND SOLDER AREA
Shell:30u" Ni UNDERPLATED OVERALL
G/F PLATED ON CONTACT AREA AND SOLDER AREA


3.TECHNICAL SPECIALITY:

RATED VOLTAGE: 30V AC MAX.
CURRENT RATING: 0.5A MAX.
INSULATION RESISTANCE:1000MΩ MIN
CONTACT REISTANCE:50mΩ MAX
WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTES
OPERATING TEMPERATURE: -40 ~+85
Humidity 80% R.H MAX



4.DIMENSIONS WITH MARK" * "MUST BE MEASURE BY QC AND IPQC

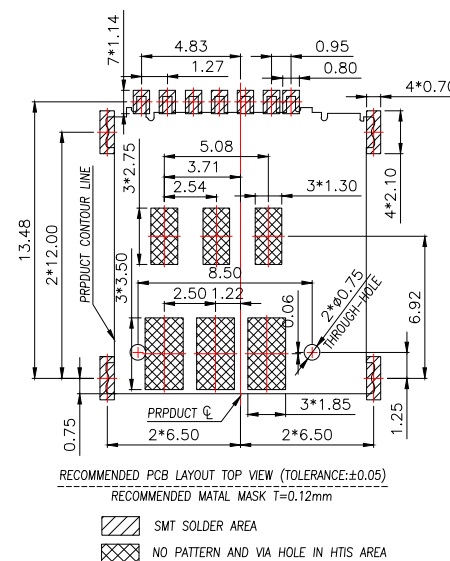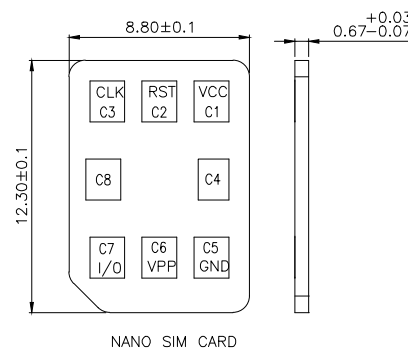

MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd			
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE:NANO SIM CARD 1.37H PUSH PUSH 有柱		
			PAR	SMN-303A-ACP7	
DECIMALS:	ANGLES:		DWN		
X.:±0.35	X'.:±2"		CHKD		
.X:±0.15	.X':±1"		APVD		
.XX:±0.10	.XX':±0.5"		CUSTOMER COPY	SIZE:A4	SHEET:1F1

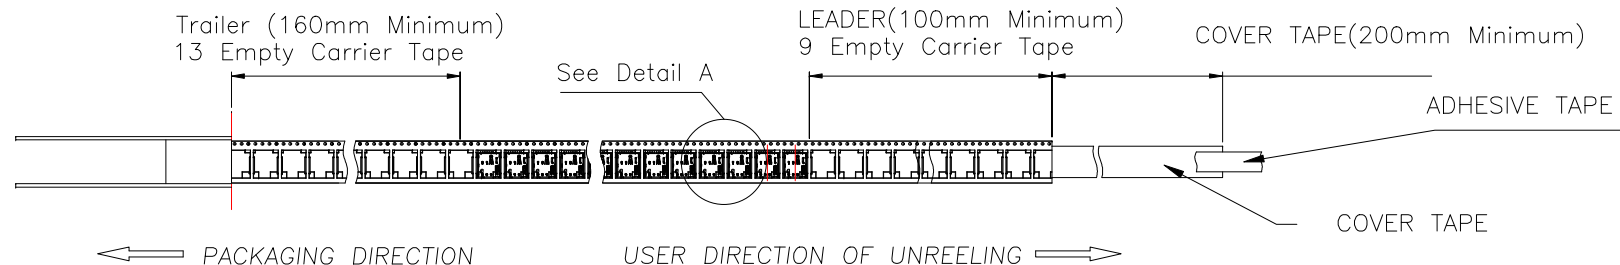

COVER TAPE PEELING ANGLE:165°~180°
PEELING FORCE:20~130g

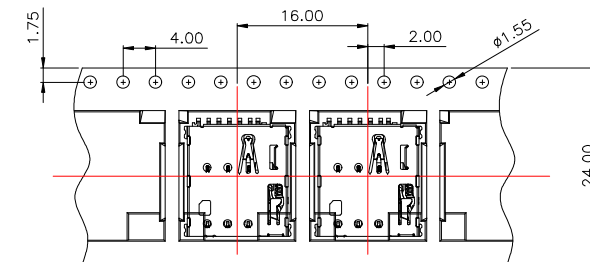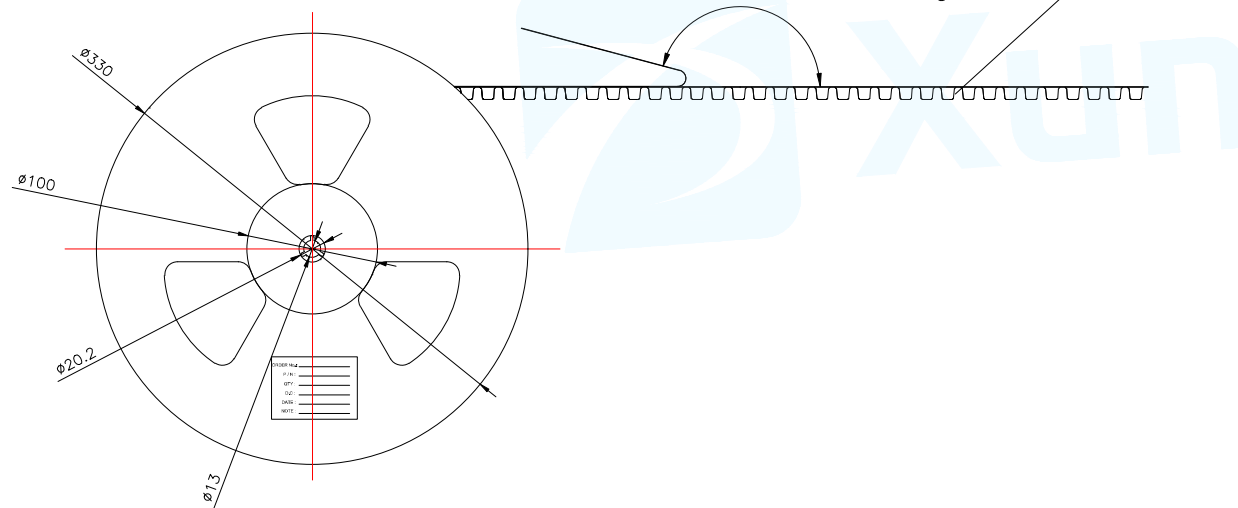

DETAIL A

1	SMN-303A-ACP7	1500	10		15000	350X350X340
ITEM	PRODUCT NO	QTY/REEL	REEL/CARTON	Kg/CARTON	QTY/CARTON	CARTON SIZE

MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE:NANO SIM CARD 1.37H PUSH PUSH 有柱
			PAR SMN-303A-ACP7
			DWN
			CHKD
DECIMALS:	ANGLES:		APVD
X.:±0.35	X":±2°		SCALE1:1
.X:±0.15	.X":±1°		UNIT:MM
.XX:±0.10	.XX":±0.5°		UNIT:MM
CUSTOMER COPY		SIZE:A4	SHEET:1F1
		REV:A	