
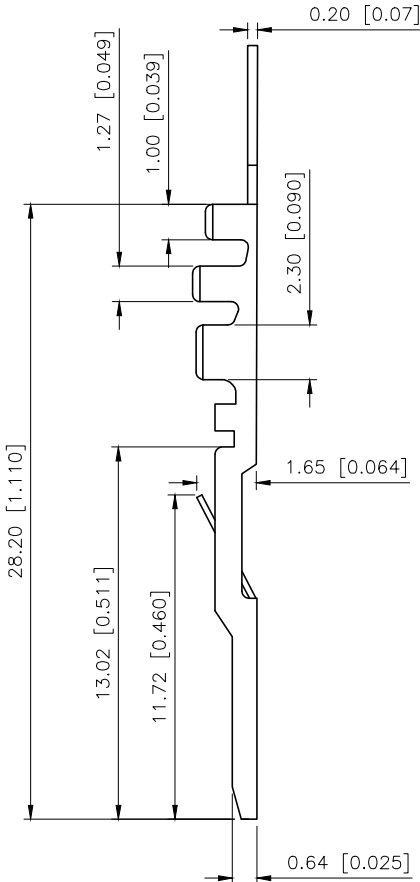


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.9.14	阿树

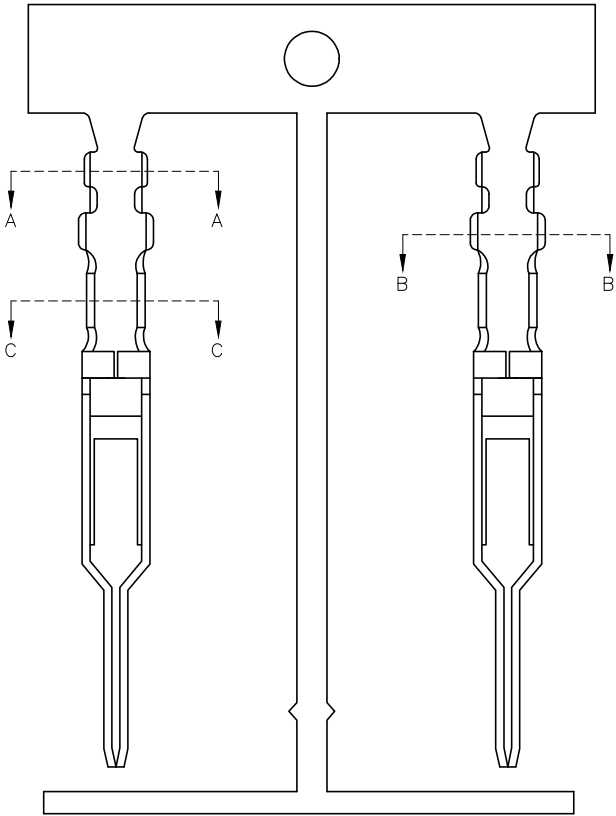


- SPECIFICATIONS
- Voltage rating:250V AC/DC
 - Current rating:3A AC/DC
 - Withstanding Voltage:800V AC/minute
 - Temperature range:−40°C~+125°C
 - Insulation resistance:≥1000MΩ
 - Contact resistance:≤20mΩ
 - After environmental testing:≤30mΩ


PART NO.:

X2510 I M-P SN
① ② ③ ④ ⑤


- ①Series Number.
②Category: T-terminal
③Shape:M-male
④Material: P-Phosphor bronze
⑤Planting style:SN-Bright tin plating



SECTION:A-A
SCALE:1:1



SECTION:B-B
SCALE:1:1



SECTION:C-C
SCALE:1:1

X2530TM-PSN	Phosphor Bronze	AWG#22-26	1.55mm(Ma)	Stamping Before Plating:30~50u" Ni;70~120u"Sn	X2530H
PART NO	Material	Wire Range	Insulation O.D.	Finish	Mates With XKB Housing

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	2.54mm Crimp Style Connectors
CHECKED		UNIT:	mm/in	PART NO.:	X2530TM-PSN
APPROVED		SIZE:	A4	DWG NO.:	