


- NOTES:
- 1. MATERIALS:
CONTACT: BERYLLIUM COPPER
ALL OTHER METAL PARTS: STAINLESS STEEL
INSULATOR: ULTEM1000
 - 2. FINISH:
CONTACT: GOLD
ALL OTHER METAL PARTS: PASSIVATED
 - 3. MECHANICAL/ENVIRONMENTAL:
DURABILITY: 500 CYCLES
TEMP RANGE: -65°C to +165°C
 - 4. ELECTRICAL:
IMPEDANCE: 50Ω
FREQUENCY RANGE: DC to 67GHz
VSWR(dB): 1.3:1 (-17.69dB)

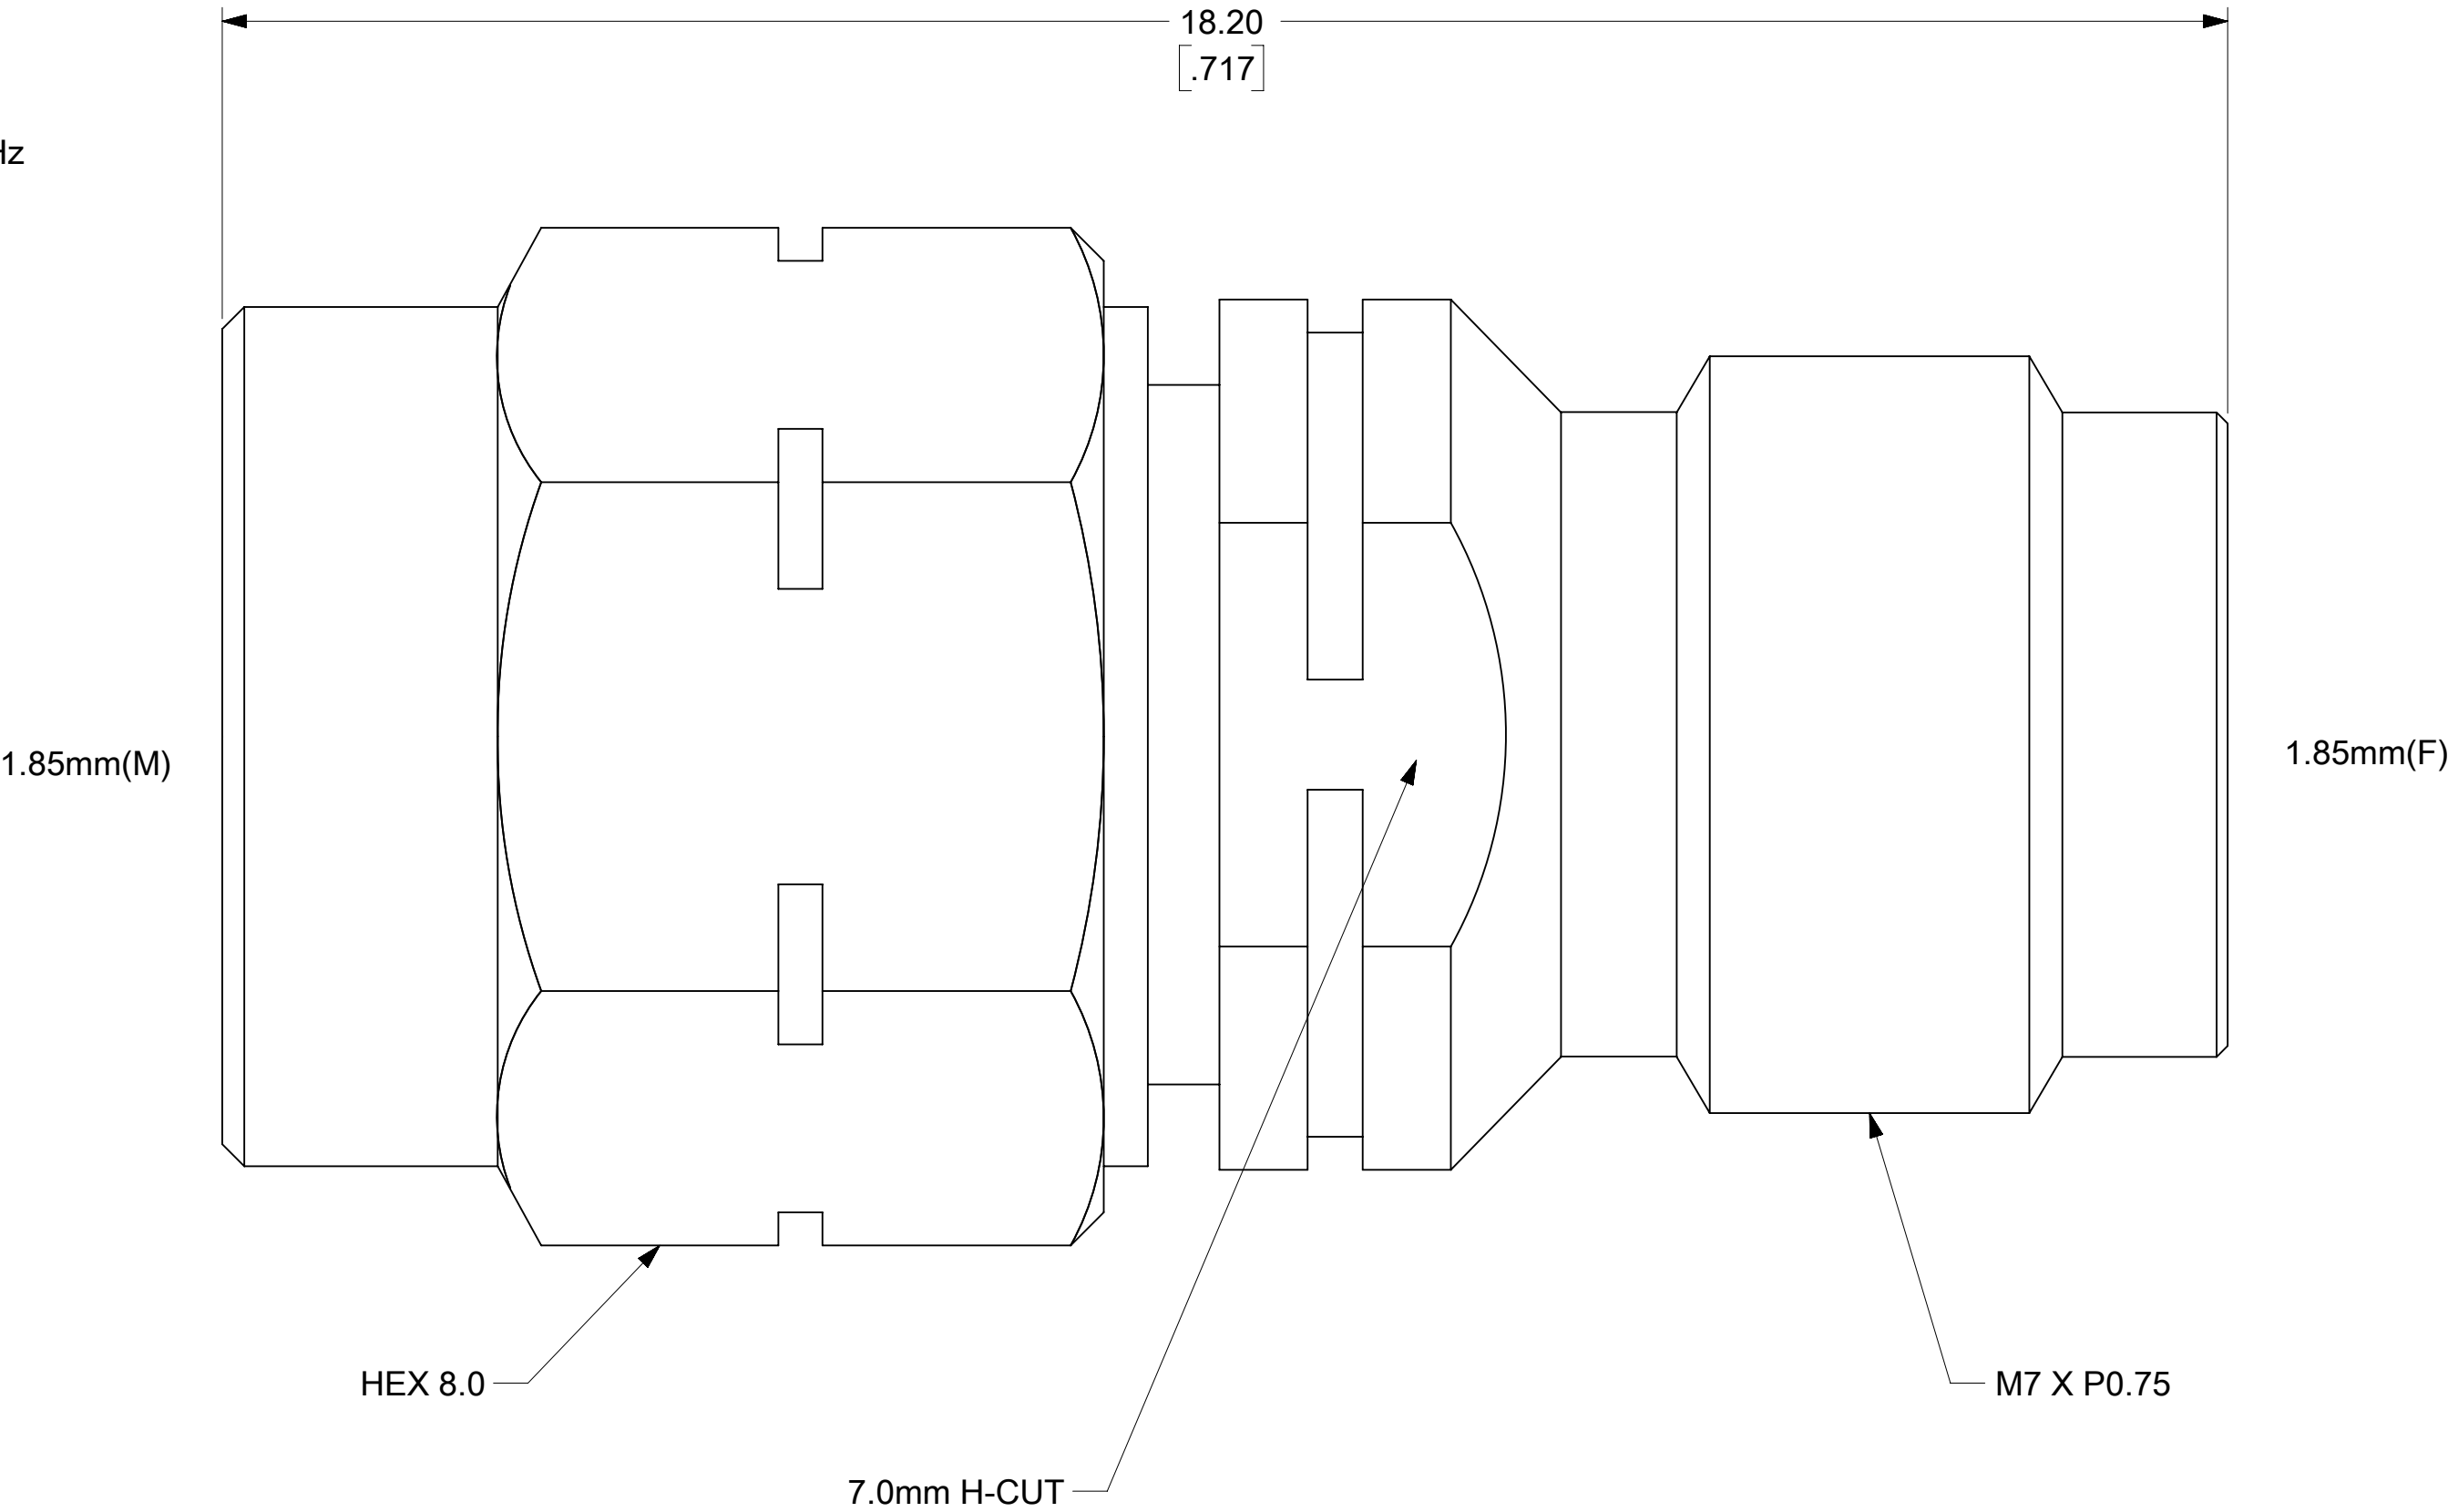

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION															
= 0 = 0 = 0	DIMENSION UNITS		SCALE		CURRENT REV DESC: UPDATED TO GENERAL MARKET				molex							
	MM/INCH		NTS													
	GENERAL TOLERANCES (UNLESS SPECIFIED)								EC NO: 735515 DRWN: KTAGAN 2023/01/18 CHK'D: LMEIER 2023/01/18 APPR: JBORRELLI 2023/01/19				1.85MM PLUG TO 1.85MM JACK ADAPTER			
		MM	INCH													
DIVISIONAL SYMBOLS	4 PLACES		±	±	INITIAL REVISION: DRWN: VISHNM2 2022/11/23 APPR: LMEIER 2022/12/15				PRODUCT CUSTOMER DRAWING							
	3 PLACES		±	±					DOCUMENT NUMBER				DOC TYPE	DOC PART	REVISION	
	2 PLACES		±	±					731570040		PSD	000	A1			
	1 PLACE		±	±												
	0 PLACES		±	±												
	ANGULAR TOL		±	°												
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING	SERIES	MATERIAL NUMBER		CUSTOMER		SHEET NUMBER				
						C-SIZE	73157	731570040				1 OF 1				