

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

© COPYRIGHT 20

BY -

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

変更

P

LTR

DESCRIPTION

DATE

DWN

APVD

A

RELEASED

09NOV2012

SU

YF

AI





REVISED

ECR-13-005815

04APR2013

RK

YN

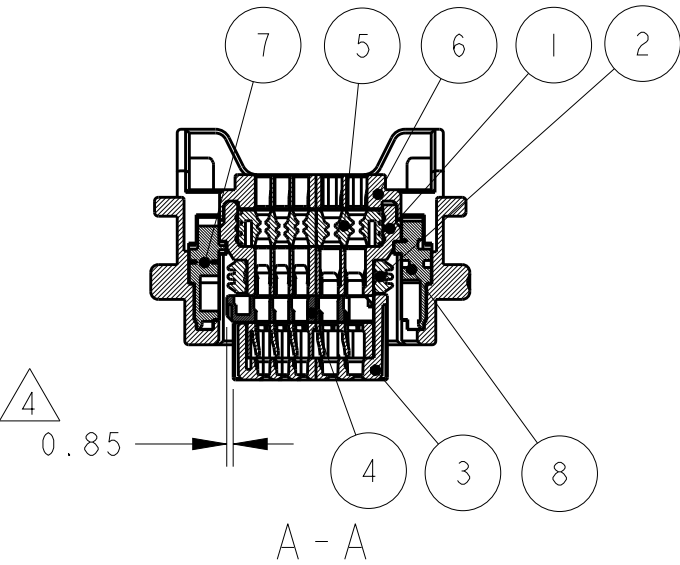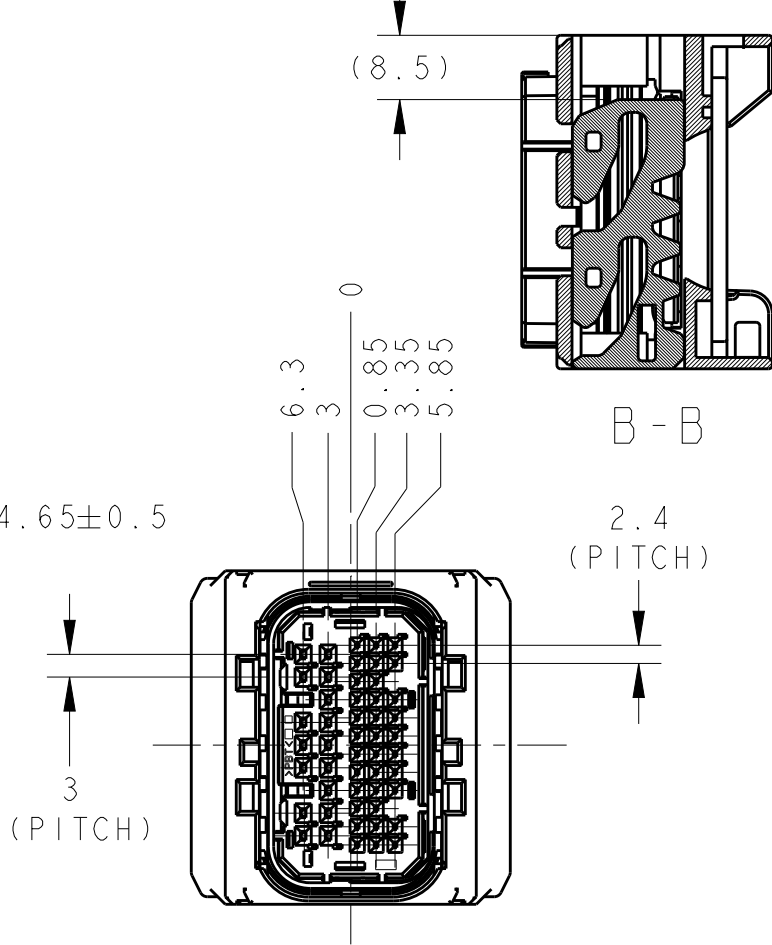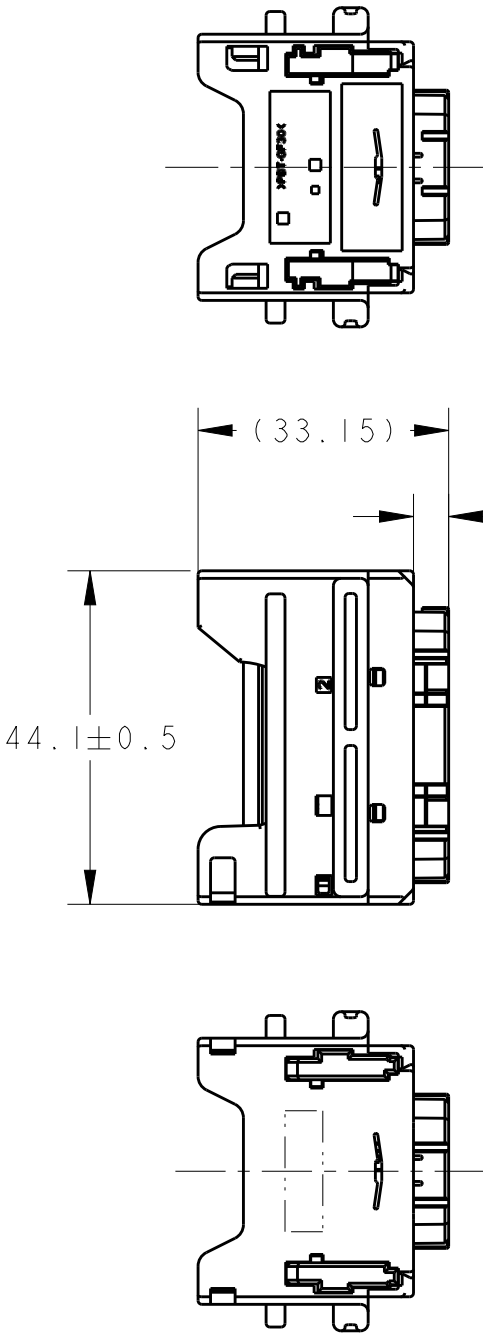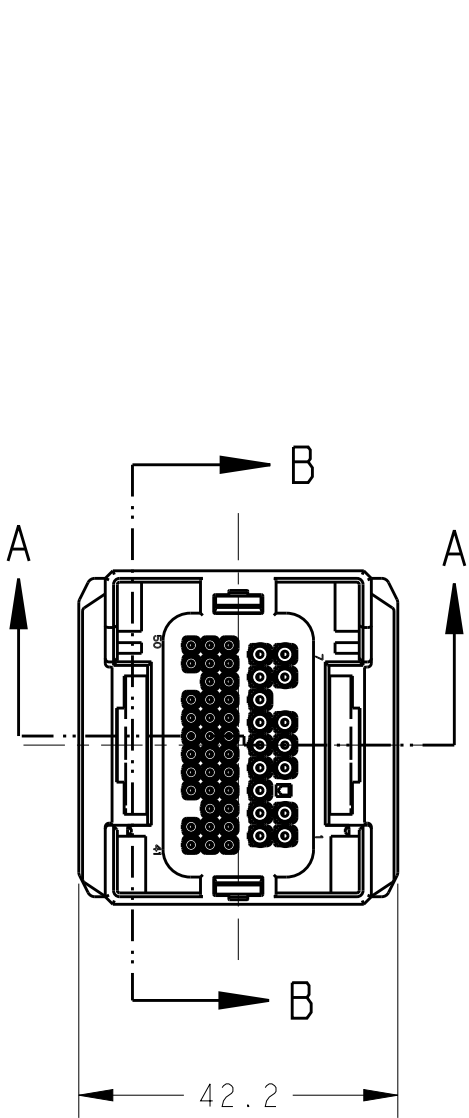

1. PART NUMBER OF CAP HOUSING TO BE MATED: SEE TABLE-1
2. APPLIED TERMINAL: SEE TABLE-2
3. HANDRING OF THIS PART SHOULD FOLLOW INSTRUCTION SHEET NO. 408-78025
4. THIS PRODUCT IS SHIPPED WITH RETAINER PRE-LOCKED POSITION.
5. WIRE COVER ASSY IS SETUPED INTO THIS PLUG ASSEMBLY BY CUSTOMER. WIRE COVER ASSY TE P/N: 2174114

1. 嵌合相手品番: TABLE-1 参照
2. 適用端子: TABLE-2 参照
3. 本製品の取扱は取扱説明書 NO. 408-78025 に従うこと
4. リテーナは仮係止状態で出荷される
5. ワイヤカバー ASSY は顧客にて本プラグアッセンブリに組立てられる
ワイヤカバー ASSY TE 品番: 2174114

TABLE-1

POS 極数	CAP ASSEMBLY PART NO キャップ型番
130	2174100

TABLE-2

SIZE	TERMINAL NO 端子型番	APPLICABLE WIRE RANGE 適用電線
0.5	1939349-1	0.3mm ² ~0.5mm ²
	1981878-1	0.22mm ²
1.0	1939351-1	0.75mm ² ~1.25mm ²
	2201289-1	0.3mm ² ~0.5mm ²

TABLE-3

I	NATURAL	PBT GF30%	SLIDER (B) 50POS	8
I	NATURAL	PBT GF30%	SLIDER (A) 50POS	7
I	BLACK	PBT GF30%	OUTER HSG 50POS	6
I	INDIAN RED	SILICONE	WIRE SEAL 50POS	5
I	NATURAL	PBT GF30%	RETAINER 50POS	4
I	BLACK	PBT	FRONT CAVITY 50POS	3
I	INDIAN RED	SILICONE	SEAL RING 50POS	2
I	BLACK	PBT GF15%	PLUG HSG 50POS	1
2174106-1	COLOR	MATERIAL	NAME	NO

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN 09NOV2012

S. UEHARA

CHK 09NOV2012

Y. NOGUCHI

APVD 09NOV2012

Y. FUJIWARA

PRODUCT SPEC

製品規格

108-78947

APPLICATION SPEC


取付適用規格

114-5400, -5500

WEIGHT

33.7 g

DIMENSIONS:
単位: 概
mm



MATERIAL

材料

SEE TABLE-3

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

一般公差 ±0.3
0-PLC ±
1-PLC ±0.5
2-PLC ±0.13
3-PLC ±0.013
4-PLC ±0.0001
ANGLES ±3° 00'

FINISH

仕上

SEE TABLE-3



TE Connectivity

NAME

名称

PLUG ASSY 50POS, SEALED TYPE,
0.5/1.0 SERIES
プラグ アッセンブリ 50極 防水タイプ 0.5/1.0シリーズ

SIZE

寸法

A3

CAGE CODE

00779

DRAWING NO

番号

C=2174106

RESTRICTED TO

-

SCALE

尺度

SHEET

1

OF

1

REV

AI